



**US Army Corps
of Engineers®**
Wilmington District

Solicitation No. W912PM23R0002
Contract No. W912PM23XXXX

PN87447

SOF Supply Support Activity

FORT LIBERTY, NORTH CAROLINA

This project was designed by the Wilmington District of the U.S. Army Corps of Engineers. The initials or signatures and registration designations of individuals appear on these project documents within the scope of their employment as required by ER 1110-1-8152.

RTA SPECIFICATIONS

FF&E - SID

Volume IV

08-AUGUST-2023

READY TO ADVERTISE (RTA) – FF&E

USASOC SOF

Supply Support Activity (PN 87447)



Fort Bragg, NC

21 September 2022

Contract No. W912PM-19-D-0004

Delivery Order W912PM-20-F-0017



Controlled by: USACE SAW
CUI Category: CONTRACT
Distribution Statement D:
Distribution authorized to Department of Defense and U.S DoD contractors only. Other requests for this document shall be referred to the POC.
POC: USACE KO (Michael Mullen, 910-251-4710)

THIS PAGE INTENTIONALLY LEFT BLANK

TABLE OF CONTENTS

Section 1: Design Analysis

Section 2: Point of Contact List

Section 3: Itemized Furniture Cost Estimate

Section 4: Data Sheets

Section 5: Furniture Plans

Section 1: Design Analysis

DESIGN ANALYSIS

This document contains the basis of design for the FF&E of a new supply support activity warehouse at Fort Bragg, North Carolina. FF&E selections will support functions occurring in the administration and high-bay warehouse areas of the new one-story building.

Basis of design descriptions for freestanding furniture and equipment were compiled from referencing the United States Department of the Army USACE Furniture Item Description for Standard FF&E Nomenclature document. FF&E images shown are basis of design products not intended to limit the selection of other manufacturers that can provide the salient features described for each item.

Systems furniture in the open office portion of the administration side of the building will be a panel-based 7'-0" X 7'-0" cluster of workstations with 65" high monolithic panels, overhead storage bins, height adjustable worktable, lateral file and box/file storage, and a dual monitor arm. The spine wall will be comprised of powered panels utilizing an 8 wire, 3 circuit electrical wiring system with 3 separate neutrals.

The private office casegoods furniture design is comprised of freestanding L-shaped wood veneer desking components. An electric sit-to-stand table desk with a front modesty panel, a return worksurface with a fixed file/file pedestal below, grommets in the worksurface top and access below the worksurface to connect to building power from the wall. An overhead storage hutch with doors and LED lighting below with a tackable surface below will rest on the return worksurface. A wood veneer wardrobe storage unit will be included.

Other desks located in the administrative area and office areas in the warehouse will be freestanding single pedestal metal and laminate desk units with worksurface grommets and half height modesty panels to access power/data outlets from the wall. Durable worktables are to be used as the transaction counters in the warehouse areas. These tables should have sturdy, durable tops with power grommets at the worksurface top, plugging in to floor boxes below, and metal fixed storage below the worksurface.

Industrial equipment that is not bolted down is included in the FF&E package and has been identified on the furniture plans as such. Those items include heavy-duty storage and drawer cabinets, pallet racks, industrial shelving units and wire bin storage. All industrial equipment should have the manufacturer's standard powder coat paint finish, with efforts made to provide a similar color for all industrial equipment items.

Finish development was very straightforward following the guidance given in the Savannah District Design Manual, the Fort Bragg Installation Design Guide, and the Interior Design UFC 3-120-10. The design team was provided with the Fort Bragg 09 90 00 Schedule for Finishes specification section as well as an infographic of the Fort Bragg exterior and interior paint color schemes for designers to select. The neutral almond color scheme is being proposed for the interior finishes for this project. Furniture finish selections should be chosen to coordinate with building paint and flooring colors, with consideration given to durable fabric selections, as well as table and chair leg glides and casters selected to avoid damage to resilient flooring throughout the building.



All seating should have proper ergonomics and durability considered, using fabrics that meet the industry standards for cleanability and wear for heavy duty use.

The furnishings in the FF&E package are organized as follows:

- Accessories – Markerboards, Trash/Recycle, Residential Equipment (Refrigerator, Undercounter refrigerator, Microwave, Coffeemaker)
- Equipment – Industrial storage cabinets, Pallet racks, Industrial shelving, Wire bin storage
- Chairs – Task seating/stools, Guest chairs, Conference chairs, Break room chairs
- Storage – Vertical files, Lateral files
- Tables – Conference table, Break room tables, Side tables
- Workstations – Panel based systems furniture, Caseworks (desking components)

Section 2: Point of Contact List

POINT OF CONTACT LIST

Brian Ballweg, AIA

Architect, Wilmington District
Design & General Engineering Section
US Army Corps of Engineers
Brian.ballweg@usace.army.mil
Office: 910-251-4881
Cell/Text: 910-231-0075

Heather K. Ayala

Project Manager
DSCENG
Comm: 910.432.2902/910.432.8466
DSN: 312.239.2902
NIPR: heather.ayala.civ@socom.mil

Michael Miskimon

Project Manager
Whitman, Requardt & Associates, LLP
mmiskimon@wrallp.com
Office: 443-224-1659

Corice Singletary

Senior Project Interior Designer
Whitman, Requardt & Associates, LLP
csingletary@wrallp.com
Office: 410-864-1042



Section 3: Itemized Furniture Cost Estimate



| USACE SAW FURNITURE, FIXTURES & EQUIPMENT (FF&E) SUMMARY | | | | | |
|-------------------------------------------------------------|--------------------------|-----------------------------------|-------------------------------------|-----------|-----------|
| BASE: FORT BRAGG, NC | | | Ready to Advertise (RTA) Submission | | 90302.002 |
| PROJECT NAME: USASOC SOF SSA | | | CLIN 004 Warehouse FF&E | | 9/21/2022 |
| ITEM CODE | QTY | ITEM DESCRIPTION | MANUFACTURER | UNIT COST | TOTAL |
| DESKING | | | | | |
| WS-01 | | WORKSTATION - 7X7 | | | \$ - |
| DL-01 | | PRIVATE OFFICE - L-SHAPED | | | \$ - |
| DT-01 | 7 | WORK DESK - 30X72 | | | \$ - |
| DT-02 | 4 | WORK DESK - 30X60 | | | \$ - |
| DT-03 | 13 | INDUSTRIAL WORKBENCH - 72" | | | \$ - |
| DT-04 | 4 | INDUSTRIAL WORKBENCH - 96" | | | \$ - |
| TABLES | | | | | |
| TB-01 | 1 | BREAK ROOM TABLE | | | \$ - |
| TB-02 | 2 | WAITING SIDE TABLE | | | \$ - |
| TB-03 | 1 | END TABLE | | | \$ - |
| TB-04 | | CONSOLE TABLE | | | \$ - |
| TC-01 | | CONFERENCE TABLE | | | \$ - |
| CHAIRS | | | | | |
| CB-01 | 4 | BREAK ROOM CHAIR | | | \$ - |
| CC-01 | | CONFERENCE CHAIR | | | \$ - |
| CG-01 | | PRIVATE OFFICE GUEST CHAIR | | | \$ - |
| CG-02 | 8 | WAITING GUEST CHAIR | | | \$ - |
| CS-01 | 13 | STOOL | | | \$ - |
| CT-01 | 3 | TASK CHAIR | | | \$ - |
| CL-01 | | RECLINER W/OTTOMAN | | | \$ - |
| STORAGE | | | | | |
| SF-01 | | VERTICAL FILES | | | \$ - |
| SF-02 | 1 | LATERAL FILES | | | \$ - |
| SF-03 | | STORAGE CABINET - 30"W | | | \$ - |
| SF-03A | 4 | STORAGE CABINET - 36"W | | | \$ - |
| SF-04 | | BOOKCASE | | | \$ - |
| ACCESSORIES | | | | | |
| AC-01 | | MAGNETIC MARKERBOARD | | | \$ - |
| AC-02 | 1 | TRASH RECEPTACLES | | | \$ - |
| AC-03 | 4 | PERSONAL TRASH BIN | | | \$ - |
| AC-04 | | REFRIGERATOR | | | \$ - |
| AC-05 | 1 | COFFEE MAKER | | | \$ - |
| AC-06 | 1 | MICROWAVE | | | \$ - |
| AC-07 | 1 | UNDERCOUNTER REFRIGERATOR | | | \$ - |
| AC-08 | 1 | EWASTE RECYCLE BIN | | | \$ - |
| AC-09 | 19 | TASK LIGHT | | | \$ - |
| EQUIPMENT | | | | | |
| EQ-02 | 15 | 59" DRAWER CABINET | | | \$ - |
| EQ-03 | 15 | 59" OVERHEAD CABINET | | | \$ - |
| EQ-04 | 8 | BATTERY CONTAINMENT PALLET | | | \$ - |
| EQ-06 | 7 | 59" DRAWER CABINET, HEAVY STORAGE | | | \$ - |
| EQ-07 | 7 | 21" OVERHEAD CABINET | | | \$ - |
| EQ-08 | 10 | SHELVING UNIT | | | \$ - |
| EQ-08A | 1 | SHELVING UNIT | | | \$ - |
| EQ-09 | 80 | OPEN SHELF UNIT | | | \$ - |
| EQ-13 | 22 | WIRE BIN STORAGE | | | \$ - |
| | | | | | |
| | FF&E Product Total | | | | \$0 |
| | Product Contingency | | | 5% | \$0.00 |
| | | | | | |
| | Shipping/Freight | | | 5% | \$0.00 |
| | | | | | |
| | Design/Project Mgmt | | | 2% | \$0.00 |
| | | | | | |
| | Installation | | | 13% | \$0.00 |
| | | | | | |
| | Government FF&E Estimate | | | | \$0 |




**USACE SAW
FURNITURE, FIXTURES & EQUIPMENT (FF&E) SUMMARY**


| | | |
|------------------------------|-------------------------------------|-----------|
| BASE: FORT BRAGG, NC | Ready to Advertise (RTA) Submission | 90302.002 |
| PROJECT NAME: USASOC SOF SSA | CLIN 005 Admin FF&E | 9/21/2022 |

| ITEM CODE | QTY | ITEM DESCRIPTION | MANUFACTURER | UNIT COST | TOTAL |
|-------------|--------------------------|----------------------------|--------------|-----------|--------|
| DESKING | | | | | |
| WS-01 | 5 | WORKSTATION - 7X7 | | | \$ - |
| DL-01 | 6 | PRIVATE OFFICE - L-SHAPED | | | \$ - |
| DT-01 | 4 | WORK DESK - 30X72 | | | \$ - |
| DT-02 | | WORK DESK - 30X60 | | | \$ - |
| DT-03 | | INDUSTRIAL WORKBENCH - 72" | | | \$ - |
| DT-04 | | INDUSTRIAL WORKBENCH - 96" | | | \$ - |
| TABLES | | | | | |
| TB-01 | 3 | BREAK ROOM TABLE | | | \$ - |
| TB-02 | 1 | WAITING SIDE TABLE | | | \$ - |
| TB-03 | 1 | END TABLE | | | \$ - |
| TB-04 | 1 | CONSOLE TABLE | | | \$ - |
| TC-01 | 1 | CONFERENCE TABLE | | | \$ - |
| CHAIRS | | | | | |
| CB-01 | 12 | BREAK ROOM CHAIR | | | \$ - |
| CC-01 | 12 | CONFERENCE CHAIR | | | \$ - |
| CG-01 | 12 | PRIVATE OFFICE GUEST CHAIR | | | \$ - |
| CG-02 | 4 | WAITING GUEST CHAIR | | | \$ - |
| CS-01 | | STOOL | | | \$ - |
| CT-01 | 19 | TASK CHAIR | | | \$ - |
| CL-01 | 1 | RECLINER W/OTTOMAN | | | \$ - |
| STORAGE | | | | | |
| SF-01 | 12 | VERTICAL FILES | | | \$ - |
| SF-02 | 7 | LATERAL FILES | | | \$ - |
| SF-03 | 2 | STORAGE CABINET - 30"W | | | \$ - |
| SF-03A | | STORAGE CABINET - 36"W | | | \$ - |
| SF-04 | 6 | BOOKCASE | | | \$ - |
| ACCESSORIES | | | | | |
| AC-01 | 6 | MAGNETIC MARKERBOARD | | | \$ - |
| AC-02 | 1 | TRASH RECEPTACLES | | | \$ - |
| AC-03 | 18 | PERSONAL TRASH BIN | | | \$ - |
| AC-04 | 1 | REFRIGERATOR | | | \$ - |
| AC-05 | 1 | COFFEE MAKER | | | \$ - |
| AC-06 | 1 | MICROWAVE | | | \$ - |
| AC-07 | 1 | UNDERCOUNTER REFRIGERATOR | | | \$ - |
| AC-08 | 1 | EWASTE RECYCLE BIN | | | \$ - |
| AC-09 | 9 | TASK LIGHT | | | \$ - |
| | FF&E Product Total | | | | \$0 |
| | Product Contingency | | | 5% | \$0.00 |
| | Shipping/Freight | | | 5% | \$0.00 |
| | Design/Project Mgmt | | | 2% | \$0.00 |
| | Installation | | | 13% | \$0.00 |
| | Government FF&E Estimate | | | | \$0 |


Section 4: Data Sheets

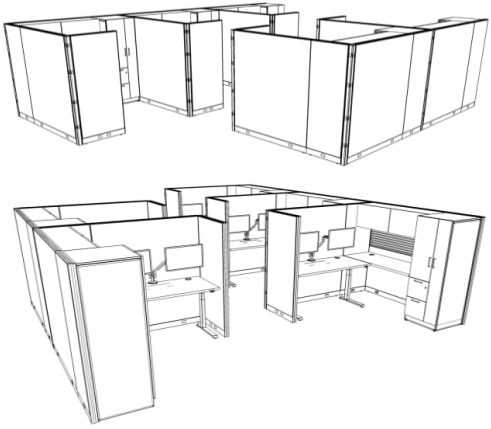


| | | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------------------------------------------------------------------------------|
| PROJECT NAME: USASOC SOF SSA USACE SAW BASE: FORT BRAGG, NC | | Job Order Number: 90302.002 Date: 9/21/2022 Item Name: WORKSTATION - 7X7 Item Number: WS-01 |
| Source: 0 | | Photo: |
| POC: David Marks EMAIL: dmarks@cofcogroup.com 202.835.1444 | |  |
| Model #: | | |
| Item Description: 7'-0" X 7'-0" Workstation 60"W x 24"D Rectangular worksurface, grommets w/covers 46"W x 29"D Adjustable height freestanding table, Electric metal C-leg base, Wire mgmt tray or basket below table top, Grommets w/covers - coordinate locations w/end user after award. (1) Dual Monitor arm per workstation 48"W Overhead storage bin with flipper doors; Energy efficient LED lighting w/vertical cord manager, lockable doors 24"W x 24"D x 50"H Hybrid storage tower, (1) Adjustable shelf with file/file below, one side; (1) Full ht. storage cabinet w/coat rod, other side. Power requirements: 3 separate neutrals, 8 wire, 3 circuit | | Finish Samples: |
| Monolithic acoustical, tackable panels, 65"H Panels; Interior tiles- Bottom/top tackable acoustical fabric, Middle slatwall tile. Exterior tiles- monolithic tackable acoustical fabric. Wing panels for stability as needed. | | Panel Fabric: Style: Textured, recycled polyester Color: Warm grey |
| ST-03 signage type included with each workstation. | | Laminate: Style: Standard solid laminate Color: White |
| Qty: 5 Unit Cost: \$0.00 Price Total: \$0.00 | | Trim/Paint: Champagne Metallic |
| Location: Open Office 114 | | Mobile Pedestal Fabric: Style: Small scale pattern, multi-colored Color: print |

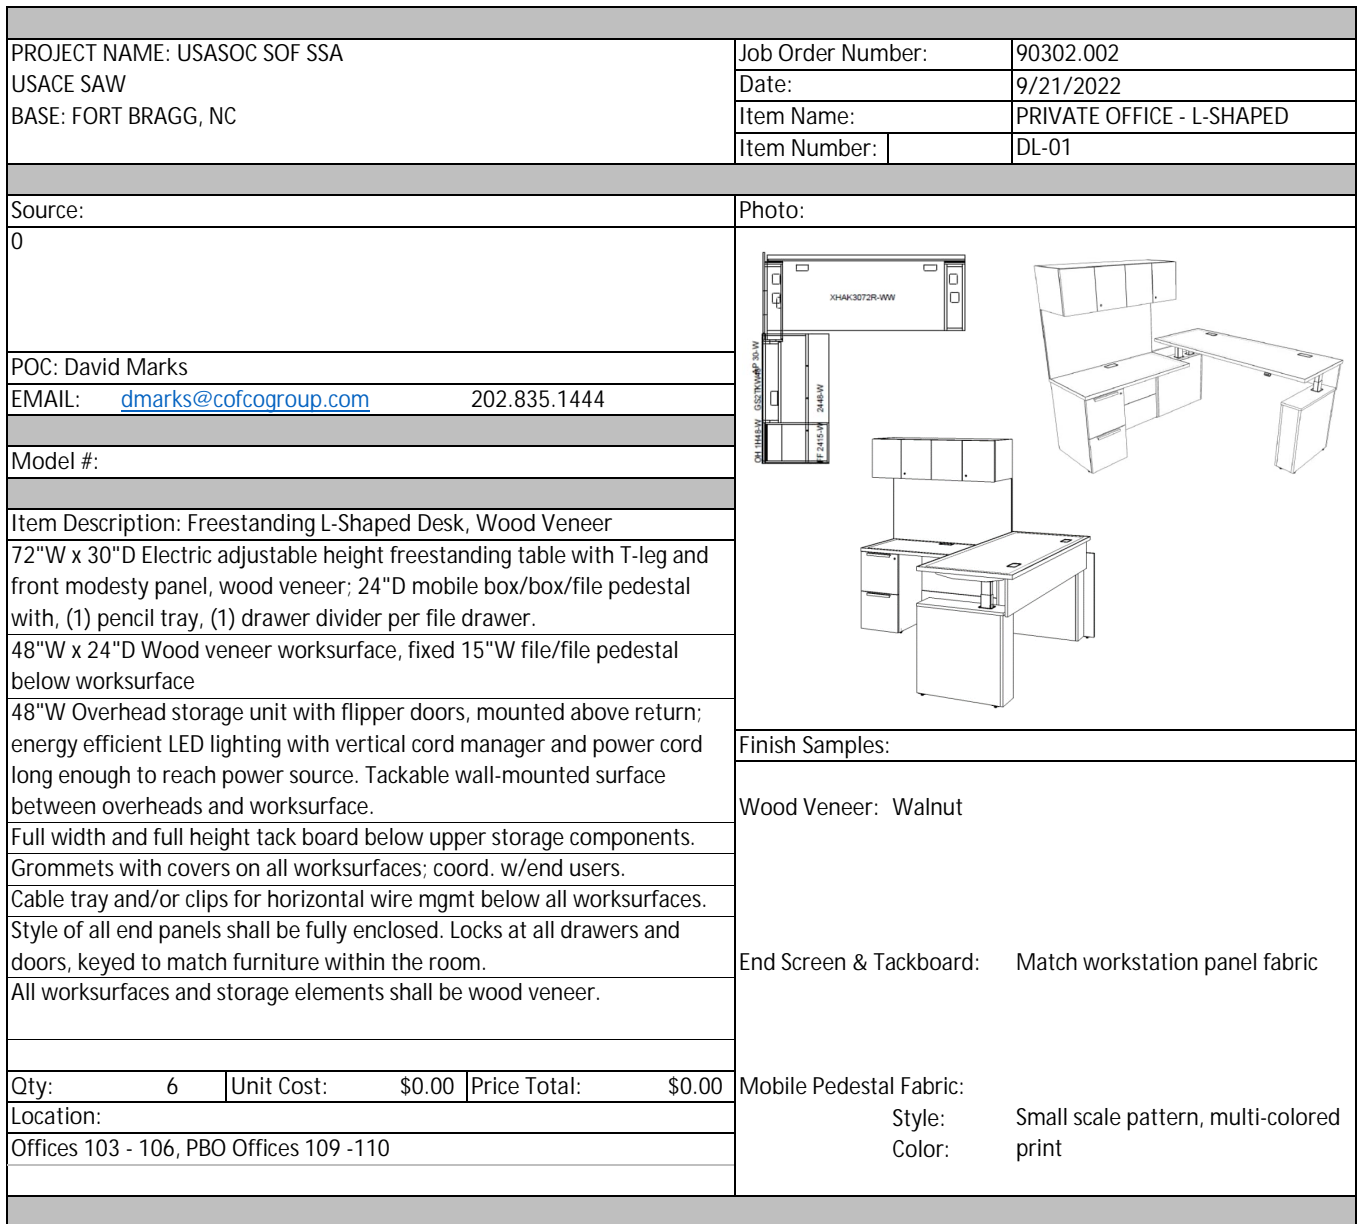




| | | |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------------------------|
| PROJECT NAME: USASOC SOF SSA USACE SAW BASE: FORT BRAGG, NC | | Job Order Number: 90302.002 |
| | | Date: 9/21/2022 |
| | | Item Name: WORK DESK - 30X72 |
| | | Item Number: DT-01 |
| Source: 0 | | |
| Photo:  | | |
| POC: David Marks | | |
| EMAIL: dmarks@cofcogroup.com 202.835.1444 | | |
| Model #: | | |
| Item Description: Freestanding Single Pedestal Desk, Metal/Laminate Overall Dimensions 72"W x 30"D x 29-1/2"H Rectangular desk with overhang; half-height modesty panel 15"W x 24"D x 28"H Box/box/file pedestal w/ (1) pencil tray per pedestal and (1) drawer divider for file drawer. Grommets with covers on worksurface; Wire mgmt cable tray and/or clips below worksurface. Power/data connectivity at adjacent wall outlets. Coordination w/wire mgmt. required at cluster layout in Stock Control Office 106. Fully enclosed end panels, locks at drawers. All worksurfaces and storage fronts shall be laminate. Storage cases and supports shall be metal. | | |
| Finish Samples: | | |
| Wood Laminate: Walnut | | |
| Painted Metal: Champagne Metallic | | |
| Qty: 7 | Unit Cost: \$0.00 | Price Total: \$0.00 |
| Location: | | |
| Stock Control Office 106, Warehouse 129 | | |





| | | | |
|------------------------------------------------------------------------------------------------------------------|---|------------------------------------------------------------------------------------|-------------------|
| PROJECT NAME: USASOC SOF SSA | | Job Order Number: | 90302.002 |
| USACE SAW | | Date: | 9/21/2022 |
| BASE: FORT BRAGG, NC | | Item Name: | WORK DESK - 30X60 |
| | | Item Number: | DT-02 |
| | | | |
| Source: | | Photo: | |
| 0 | |  | |
| POC: David Marks | | | |
| EMAIL: dmarks@cofcogroup.com 202.835.1444 | | | |
| | | | |
| Model #: | | | |
| | | | |
| Item Description: Freestanding Single Pedestal Desk, Metal/Laminate | | | |
| Overall Dimensions 60"W x 30"D Rectangular desk with overhang; half-height modesty panel | | | |
| 15"W x 24"D x 28"H Box/box/file pedestal w/ (1) pencil tray per pedestal and (1) drawer divider for file drawer. | | | |
| Grommets with covers on worksurface; Wire mgmt cable tray and/or clips below worksurface. | | | |
| Power/Data accessed from wall outlets | | | |
| All worksurfaces and storage fronts shall be laminate. Storage cases and supports shall be metal. | | | |
| Fully enclosed end panels, locks at drawers. | | Finish Samples: | |
| | | Wood Laminate: Walnut | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | Painted Metal: Champagne Metallic | |
| | | | |
| | | | |
| Qty: | 4 | Unit Cost: | \$0.00 |
| Location: | | Price Total: | \$0.00 |
| CLS Office 137, Mech/Plumb 127 | | | |
| | | | |




| | | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|---------------------------------------------------------------------------------------------------------------|
| PROJECT NAME: USASOC SOF SSA USACE SAW BASE: FORT BRAGG, NC | | Job Order Number: 90302.002 Date: 9/21/2022 Item Name: INDUSTRIAL WORKBENCH - 72" Item Number: DT-03 |
| Source: 0 | | Photo: |
| POC: David Marks EMAIL: dmarks@cofcogroup.com 202.835.1444 | |  |
| Model #: | | |
| Item Description: Workbench with Modular Cabinet, Metal/Laminate | | |
| Overall Dimensions: 72"W x 30"D x 35"H | | |
| Solid Hardwood top, heavy-duty: 72"W X 30"D X 1-3/4"H | | |
| Formed steel panel bench legs with side panels installed | | |
| Grommets with covers on worksurface; Wire mgmt cable tray and/or clips below worksurface. | | |
| Field drill grommet hole into worksurface top to receive power grommet. Coordinate location with users during installation. | | |
| Basis of design power grommet: Doug Mockett PCS50C - Pop-Up Power Grommet with Brushed Liner (3 power/ 2 Cat. 5E data). Dimensions: (cut out) 9-3/8"W x 5-31/32"D; Color: Black anodized with black plugs/black brush. | | |
| Modesty panel - Lightweight steel predrilled panel to completely enclose benching rear to cabinet. | | |
| Storage Cabinet: 35" Bench Height preconfigured cabinet with housing, door assembly and shelf with 400 lb cap. (1) Drawer, 4 compartments, (1) Shelf and (1) Door, (1) Bottom pan, 5-7/8" Usable drawer height. | | |
| Qty: 13 | Unit Cost: \$0.00 | Price Total: \$0.00 |
| Location: Warehouse 129, GIP Warehouse 134 | | Finish Samples: |
| | | Painted Metal Base: Warm grey |
| | | Hardwood Top: Maple |
| | | Power Grommet: Black Anodized (90) |




| | | | |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|--------------------------------------------------------------------------------------|----------------------------|
| PROJECT NAME: USASOC SOF SSA | | Job Order Number: | 90302.002 |
| USACE SAW | | Date: | 9/21/2022 |
| BASE: FORT BRAGG, NC | | Item Name: | INDUSTRIAL WORKBENCH - 96" |
| | | Item Number: | DT-04 |
| Source: | | Photo: | |
| 0 | |  | |
| POC: David Marks | | | |
| EMAIL: dmarks@cofcogroup.com | | 202.835.1444 | |
| Model #: | | | |
| Item Description: Workbench with Modular Cabinet, Metal/Laminate | | | |
| Overall Dimensions: 96"W x 30"D x 35"H | | | |
| Solid Hardwood top, heavy-duty: 96"W X 30"D X 1-3/4"H | | | |
| Formed steel panel bench legs with side panels installed | | | |
| Grommets with covers on worksurface; Wire mgmt cable tray and/or clips below worksurface. | | | |
| Field drill grommet hole into worksurface top to receive power grommet. Coordinate location with users during installation. | | | |
| Basis of design power grommet: Doug Mockett PCS50C - Pop-Up Power Grommet with Brushed Liner (3 power/ 2 Cat. 5E data). Dimensions: (cut out) 9-3/8"W x 5-31/32"D; Color: Black anodized with black plugs/black brush. | | | |
| Modesty panel - Lightweight steel predrilled panel to completely enclose benching rear to cabinet. | | | |
| Storage Cabinet: 35" Bench Height preconfigured cabinet with housing, door assembly and shelf with 400 lb cap. (1) Drawer, 4 compartments, (1) Shelf and (1) Door, (1) Bottom pan, 5-7/8" Usable drawer height. | | | |
| Qty: | 4 | Unit Cost: | \$0.00 |
| Price Total: | | \$0.00 | |
| Location: | | | |
| Warehouse 129 | | | |
| | | Finish Samples: | |
| | | Painted Metal Base: Warm Grey | |
| | | Hardwood Top: Maple | |
| | | Power Grommet: Black Anodized (90) | |
| | |  | |




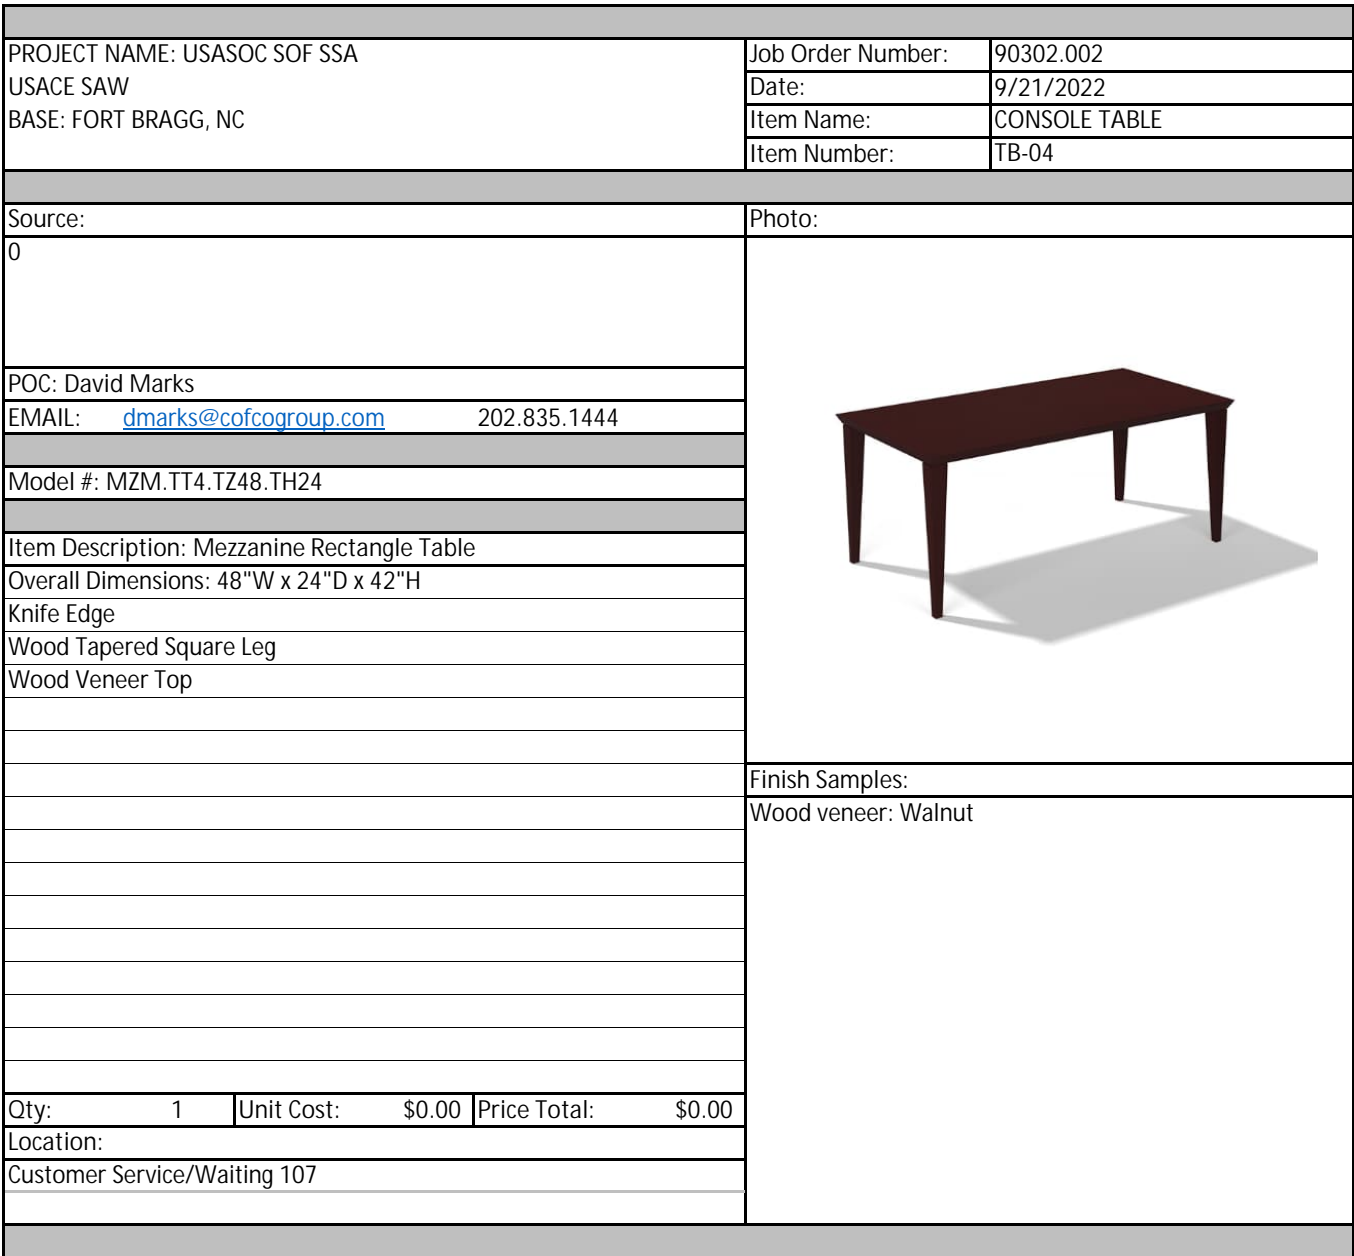
| | | | |
|--------------------------------------------------------------------------------------|---|-------------------------------------------------------------------------------------|------------------|
| PROJECT NAME: USASOC SOF SSA | | Job Order Number: | 90302.002 |
| USACE SAW | | Date: | 9/21/2022 |
| BASE: FORT BRAGG, NC | | Item Name: | BREAK ROOM TABLE |
| | | Item Number: | TB-01 |
| | | | |
| Source: | | Photo: | |
| 0 | |  | |
| POC: David Marks | | | |
| EMAIL: dmarks@cofcogroup.com 202.835.1444 | | | |
| | | | |
| Model #: 3272.TBT4.TR3636TH29, 3271.TBT4.TR3636 | | | |
| | | | |
| Item Description: Parallon Break Room Table | | | |
| Dimensions: 36"Diameter x 29"H | | | |
| Laminate top with vinyl/ABS edge | | | |
| Powder Coated Metal x-base with glides | | | |
| High pressure laminate finish from manufacturer's standard selection. | | | |
| Round Top | | | |
| | | Finish Samples: | |
| | | Base Finish: Silver | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| Qty: | 4 | Unit Cost: | \$0.00 |
| Price Total: | | \$0.00 | |
| Location: | | | |
| Break Room 118, CLS Office 137 | | | |
| | | | |




| | | |
|----------------------------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------------------------|
| PROJECT NAME: USASOC SOF SSA USACE SAW BASE: FORT BRAGG, NC | | Job Order Number: 90302.002 Date: 9/21/2022 Item Name: WAITING SIDE TABLE Item Number: TB-02 |
| Source: 0 | | Photo: |
| POC: David Marks EMAIL: dmarks@cofcogroup.com 202.835.1444 | |  |
| Model #: MZM.TT6.TZ21.TH24 | | |
| Item Description: Mezzanine End Table | | |
| Overall Dimensions: 21"Dia x 24"H | | |
| 4 Tapered wood legs. | | |
| Wood veneer top. | | |
| | | |
| | | |
| | | |
| | | |
| | | Finish Samples: |
| | | Wood veneer: Walnut |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| Qty: 2 Unit Cost: \$0.00 Price Total: \$0.00 | | |
| Location: | | |
| Customer Service/Waiting 107, Customer Service Area 135 | | |




| | | | |
|--------------------------------------------------------------------------------------|--|-------------------------------------------------------------------------------------|-----------|
| PROJECT NAME: USASOC SOF SSA | | Job Order Number: | 90302.002 |
| USACE SAW | | Date: | 9/21/2022 |
| BASE: FORT BRAGG, NC | | Item Name: | END TABLE |
| | | Item Number: | TB-03 |
| Source: | | Photo: | |
| 0 | |  | |
| POC: David Marks | | | |
| EMAIL: dmarks@cofcogroup.com 202.835.1444 | | | |
| Model #: SRX1 36RDFX | | | |
| Item Description: Round End Table | | | |
| Overall Dimensions: 36" Diameter | | | |
| 30" high. | | | |
| High pressure laminate top. | | | |
| 4-Star metal base. | | | |
| | | | |
| | | Finish Samples: | |
| | | Laminate: Walnut wood laminate | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| Qty: 1 | | Unit Cost: | \$0.00 |
| Location: | | Price Total: | \$0.00 |
| Storage/File 122 | | | |






| | | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------------------------------------------------------------------------------|
| PROJECT NAME: USASOC SOF SSA USACE SAW BASE: FORT BRAGG, NC | | Job Order Number: 90302.002 |
| | | Date: 9/21/2022 |
| | | Item Name: CONFERENCE TABLE |
| | | Item Number: TC-01 |
| Source: 0 | | |
| Photo: | | |
| POC: David Marks | |  |
| EMAIL: dmarks@cofcogroup.com 202.835.1444 | | |
| Model #: | | |
| Item Description: Vela Conference Table, Wood Veneer | | |
| Overall Dimensions: 48"W x 168"L x 29"H | | |
| Wood veneer top, Metal T-leg base with metal end caps. | | |
| Provide (1) power/data module: Provide a minimum of (2) simplex power outlets and (2) data/comm. ports, per module. Grommet with cover; coordinate location w/end user after award. | | |
| Wire mgmt tray or basket below the table top. | | |
| Leveling glides. | | |
| Ganging hardware; tables shall fit flush with one another when required, refer to floor plan. | | |
| | | Finish Samples: |
| | | Top Finish: Wood veneer, walnut |
| | | Base Finish: Champagne Metallic |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| Qty: 1 | Unit Cost: \$0.00 | Price Total: \$0.00 |
| Location: | | |
| Conference Room 113 | | |




| | | | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|-----------------------------------------------------------------------------------------------------------------------|------------------|---------------------|
| PROJECT NAME: USASOC SOF SSA | | Job Order Number: | 90302.002 | |
| USACE SAW | | Date: | 9/21/2022 | |
| BASE: FORT BRAGG, NC | | Item Name: | BREAK ROOM CHAIR | |
| | | Item Number: | CB-01 | |
| Source: | | Photo: | | |
| 0 | |  | | |
| POC: David Marks | | | | |
| EMAIL: dmarks@cofcogroup.com 202.835.1444 | | | | |
| Model #: 1171.FT1.US.UB.ARO | | | | |
| Item Description: Baja Chair, Metal Frame, Thermoplastic/Poly | | | | |
| Overall dimensions: 22.25"W x 21.5"D x 32.5"H | | | | |
| Frame shall be tubular steel or die-cast aluminum welded frame construction; welded joints. Legs shall have welded supports. | | | | |
| End caps shall be molded plastic, finished to match frame color. | | | | |
| Back flex mechanisms shall gradually increase resistance with applied pressure. Backrests shall have welded steel supports that attach to the back flex mechanisms. | | | | |
| The back attachment to the frame shall be concealed. | | | | Finish Samples: |
| End caps shall be molded plastic, finished to match frame color. | | Seat & Back Upholstery: multi-color vinyl fabric, Medium Pattern Scale Fabric Metal Base: Silver powdercoat | | |
| Non-marring floor glides. | | | | |
| Chairs shall have a reinforced back, arms, and legs. | | | | |
| The seat shall have a waterfall edge. | | | | |
| Textured Thermoplastic/Polypropylene, or similar material seat and back shell with upholstered seat and back pad. | | | | |
| | | | | |
| Qty: 16 | Unit Cost: \$0.00 | | | Price Total: \$0.00 |
| Location: | | | | |
| Break Room 118, CLS Office 137 | | | | |
| | | | | |





| | | |
|---------------------------------------------------------------------------------------------------------------------------------------|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PROJECT NAME: USASOC SOF SSA USACE SAW BASE: FORT BRAGG, NC | | Job Order Number: 90302.002 Date: 9/21/2022 Item Name: CONFERENCE CHAIR Item Number: CC-01 |
| Source: 0 | | Photo: |
| POC: David Marks EMAIL: dmarks@cofcogroup.com 202.835.1444 | |  |
| Model #: 5723YB8.A111 | | |
| Item Description: Sona Ergonomic Conference Seating | | |
| Minimum dimensions: 18" seat width, 18" seat depth, 38" overall ht., 17.7" above the seat ht. | | |
| Style: Rectangular back, thin line design | | |
| Shall be different than conference seating. | | |
| Fully upholstered seat and back. | | |
| Seat ht adjustment shall have a 4.5' minimum range between 15"-22". | | |
| Seat depth shall have a 2" minimum range w/16.9" adjustment incl. | | |
| Height, width and depth adjustable arms. Armrests shall have a 4" minimum ht. adjustment. Width shall adjust at least 1-1/4" per arm. | | |
| Static lumbar support shall be located between 5.9"-9.8" above the seat ht. Lumbar mechanism shall have a 3" vertical adjustment. | | Finish Samples: Seat & Back Upholstery: Solid Faux Leather Faux Leather- Manufacturer's standard stain resistant selection; 100,000+ double rubs. Frame, arms, base, and casters to be black. |
| 5-Star base with soft casters for hard floor surface. | | |
| | | |
| | | |
| | | |
| Qty: 12 | Unit Cost: \$0.00 | Price Total: \$0.00 |
| Location: Conference Room 113 | | |




| | | | |
|------------------------------------------------------------------------------------------------------------------------------|-------------------|-------------------------------------------------------------------------------------|----------------------------|
| PROJECT NAME: USASOC SOF SSA | | Job Order Number: | 90302.002 |
| USACE SAW | | Date: | 9/21/2022 |
| BASE: FORT BRAGG, NC | | Item Name: | PRIVATE OFFICE GUEST CHAIR |
| | | Item Number: | CG-01 |
| Source: | | | |
| 0 | | Photo: | |
| POC: David Marks | |  | |
| EMAIL: dmarks@cofcogroup.com 202.835.1444 | | | |
| Model #: KPASQ-06 | | | |
| Item Description: Kompis Guest Chair, Metal Frame | | | |
| Overall dimensions: 23"W x 21-3/4"D x 32"H | | | |
| Frame shall be tubular steel or die-cast aluminum welded frame construction; welded joints. Legs shall have welded supports. | | | |
| End caps shall be molded plastic, finished to match frame color. | | | |
| Non-marring floor glides. | | | |
| Chairs shall have a reinforced back, arms, and legs. | | | |
| The seat shall have a waterfall edge. | | | |
| Fully upholstered seat and wood back. | | Seat Upholstery: Multi-colored vinyl fabric, Medium scale pattern | |
| 2-piece seat and back. | | | |
| Open arms. | | | |
| Metal 4-leg base. | | Wood back- Walnut | |
| | | | |
| | | | |
| | | | |
| | | | |
| Qty: 12 | Unit Cost: \$0.00 | Price Total: \$0.00 | |
| Location: | | | |
| Office 103 - 106, PBO Office 109 -110 | | | |





| | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--------------------------------|
| PROJECT NAME: USASOC SOF SSA USACE SAW BASE: FORT BRAGG, NC | | Job Order Number: 90302.002 |
| | | Date: 9/21/2022 |
| | | Item Name: WAITING GUEST CHAIR |
| | | Item Number: CG-02 |
| Source: 0 | | |
| Photo:  | | |
| POC: David Marks | | |
| EMAIL: dmarks@cofcogroup.com 202.835.1444 | | |
| Model #: ZALGA-03 | | |
| Item Description: Zayn Guest Chair, Metal Frame, Thermoplastic/Poly | | |
| Overall dimensions: 22-1/2"W x 30"H x 22-7/8"D | | |
| Frame shall be tubular steel or die-cast aluminum welded frame construction; welded joints. Legs shall have welded supports. | | |
| End caps shall be molded plastic, finished to match frame color. | | |
| Back flex mechanisms shall gradually increase resistance with applied pressure. Backrests shall have welded steel supports that attach to the back flex mechanisms. | | |
| The back attachment to the frame shall be concealed. | | |
| End caps shall be molded plastic, finished to match frame color. | | |
| Non-marring floor glides. | | |
| Chairs shall have a reinforced back, arms, and legs. | | |
| The seat shall have a waterfall edge. | | |
| Textured Thermoplastic/Polypropylene, or similar material seat and back shell with upholstered seat and back pad. | | |
| Qty: 12 Unit Cost: \$0.00 Price Total: \$0.00 | | |
| Location: | | |
| Customer Service/Waiting 107, Customer Service Area 135 | | |
| Finish Samples: | | |
| Seat & Back Upholstery: multi-color vinyl fabric, Medium Pattern Scale Fabric | | |
| Wood back- Manufacturer's standard hardwood stain selection. | | |
| Base: | | |
| Metal- Manufacturer's standard powder coat paint TBD | | |


| | | | |
|---------------------------------------------------------------------------------------------------------------------------------------|-------------------|-------------------------------------------------------------------------------------|-----------|
| PROJECT NAME: USASOC SOF SSA | | Job Order Number: | 90302.002 |
| USACE SAW | | Date: | 9/21/2022 |
| BASE: FORT BRAGG, NC | | Item Name: | STOOL |
| | | Item Number: | CS-01 |
| Source: | | Photo: | |
| 0 | |  | |
| POC: David Marks | | | |
| EMAIL: dmarks@cofcogroup.com 202.835.1444 | | | |
| Model #: 5622BB1.A95S2 | | | |
| Item Description: Ergonomic Task Stool | | | |
| Minimum dimensions: Seat width 18", seat ht. 22-30", seat depth 18", overall ht. 50-57", back ht. 17.7" minimum above the seat ht. | | | |
| Style: Rectangular back. | | | |
| Fully upholstered seat and mesh back. | | | |
| Height, width and depth adjustable arms. Armrests shall have a 4" minimum ht. adjustment. Width shall adjust at least 1-1/4" per arm. | | | |
| Static lumbar support shall be located between 5.9"-9.8" above the seat ht. Lumbar mechanism shall have a 3" vertical adjustment. | | | |
| 5-Star base with soft casters for hard floor surface. | | Seat & Back Upholstery: Solid Woven Fabric | |
| Height adjustable foot ring. | | Manufacturer's standard mesh or polymer elastomeric. | |
| Seat ht adjustment shall have a 4.5' minimum range between 15"-22". | | Base Finish: | |
| Seat depth shall have a 2" minimum range w/16.9" adjustment incl. | | Frame, arms, base, and casters to be black. | |
| *Seat quantity in FF&E package is correct; all CS-01 stools are not shown on furniture plans. Located at DT-03 and DT-04 tables. | | | |
| In GIP Warehouse 134 provide (1) CS-01 for every two DT-03 tables. | | | |
| Qty: 13 | Unit Cost: \$0.00 | Price Total: \$0.00 | |
| Location: | | | |
| Warehouse 129, GIP Warehouse 134 | | | |


| | | |
|---------------------------------------------------------------------------------------------------------------------------------------|-------------------|-----------------------------|
| PROJECT NAME: USASOC SOF SSA USACE SAW BASE: FORT BRAGG, NC | | Job Order Number: 90302.002 |
| | | Date: 9/21/2022 |
| | | Item Name: TASK CHAIR |
| | | Item Number: CT-01 |
| Source: 0 | | |
| POC: David Marks | | |
| EMAIL: dmarks@cofcogroup.com 202.835.1444 | | |
| Model #: 5623YB1.A95 | | |
| Item Description: Focus Ergonomic Mid-Back Task Seating | | |
| Minimum dimensions: 18" seat width, 18" seat depth, 38" overall ht., 17.7" above the seat ht. | | |
| Style: Rectangular back, thin line design | | |
| Shall be different than conference seating. | | |
| Fully upholstered seat and mesh back. Mesh portion of back to be completely encapsulated by the frame. | | |
| Seat ht adjustment shall have a 4.5' minimum range between 15"-22". | | |
| Seat depth shall have a 2" minimum range w/16.9" adjustment incl. | | |
| Height, width and depth adjustable arms. Armrests shall have a 4" minimum ht. adjustment. Width shall adjust at least 1-1/4" per arm. | | |
| Static lumbar support shall be located between 5.9"-9.8" above the seat ht. Lumbar mechanism shall have a 3" vertical adjustment. | | |
| 5-Star base with soft casters for hard floor surface. | | |
|  | | |
| Finish Samples: | | |
| Seat & Back Upholstery: Solid Woven Black Fabric | | |
| Manufacturer's standard mesh or polymer elastomeric. | | |
| Frame, arms, base, and casters to be black. | | |
| Qty: 22 | Unit Cost: \$0.00 | Price Total: \$0.00 |
| Location: | | |
| Office 103 - 106, Stock Control Office 108, PBO Office 109 -110, Open Office 114, Warehouse 129, CLS Office 137, Mech/Plumb 127 | | |





| | | | | | |
|--------------------------------------------------------------------------------------|---|------------|--------|------------------------------------------------------------------------------------|--------------------|
| PROJECT NAME: USASOC SOF SSA | | | | Job Order Number | 90302.002 |
| USACE SAW | | | | Date: | 9/21/2022 |
| BASE: FORT BRAGG, NC | | | | Item Name: | RECLINER W/OTTOMAN |
| | | | | Item Number: | CL-01 |
| | | | | | |
| Source: | | | | Photo: | |
| 0 | | | |  | |
| POC: David Marks | | | | | |
| EMAIL: dmarks@cofcogroup.com 202.835.1444 | | | | | |
| Model #: 1479, 1476W | | | | | |
| Item Description: Recliner, Faux Leather | | | | | |
| Overall Dimensions: 30.75"W x 29.5"D x 40.5"H | | | | Finish Samples: | |
| Style shall be transitional. | | | | | |
| Fully upholstered recliner with headrest. | | | | | |
| Tight back cushion, tight seat cushion. | | | | | |
| Reclining backrest. | | | | | |
| Fully upholstered foot rest with control lever. | | | | | |
| Closed arms with wood arm caps. | | | | | |
| Metal or wood legs with soft casters. | | | | | |
| Metal Patient Ottoman- 18"D x 18"W x 13.5"H | | | | | |
| | | | | | |
| | | | | Base: Silver | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| Qty: | 1 | Unit Cost: | \$0.00 | Price Total: | \$0.00 |
| Location: | | | | | |
| Mother's 119 | | | | | |
| | | | | | |


| | | | | | |
|--------------------------------------------------------------------------------------------------------------------------------|-------------------|-------------------------------------------------------------------------------------|----------------|-------------|--------|
| PROJECT NAME: USASOC SOF SSA | | Job Order Number: | 90302.002 | | |
| USACE SAW | | Date: | 9/21/2022 | | |
| BASE: FORT BRAGG, NC | | Item Name: | VERTICAL FILES | | |
| | | Item Number: | SF-01 | | |
| | | | | | |
| Source: | | Photo: | | | |
| 0 | |  | | | |
| POC: David Marks | | | | | |
| EMAIL: dmarks@cofcogroup.com 202.835.1444 | | | | | |
| | | | | | |
| Model # H514, HF23C | | | | | |
| | | | | | |
| Item Description: Vertical Files | | | | | |
| Overall dimensions: 15"W X 25"D X 52"H | | | | | |
| File cases, bases, tops, drawers, shelves, drawer fronts, and doors shall be constructed of steel and fully finished. | | | | | |
| Base: steel, comprised of a lower pan and leveling glides. | | | | | |
| Leveling glides to provide minimum 5/8" adjustment. | | Finish Samples: Painted metal: Warm grey/tan | | | |
| Drawer sides and back shall be full height to accommodate a standard hanging file with a labeling tab. | | | | | |
| Drawer bodies formed steel in a welded construction w/hanging file rails and removable drawer fronts, replacable in the field. | | | | | |
| Drawer suspension slides shall be full extension, progressive, heavy duty steel. | | | | | |
| A safety interlock system that allows only one drawer to be opened at a time shall be standard on all files. | | | | | |
| The interior and exterior finish of cases shall match. | | | | | |
| 22-gauge steel welded construction. Units shipped fully assembled. | | | | | |
| Removable lock core. | | | | | |
| Qty: 12 | Unit Cost: \$0.00 | | | Price Total | \$0.00 |
| Location: | | | | | |
| Storage/File 122 | | | | | |
| | | | | | |


| | | | |
|-----------------------------------------------------------------------------------------------------------------------|-------------------|-------------------------------------------------------------------------------------|---------------|
| PROJECT NAME: USASOC SOF SSA | | Job Order Number: | 90302.002 |
| USACE SAW | | Date: | 9/21/2022 |
| BASE: FORT BRAGG, NC | | Item Name: | LATERAL FILES |
| | | Item Number: | SF-02 |
| Source: | | Photo: | |
| 0 | |  | |
| POC: David Marks | | | |
| EMAIL: dmarks@cofcogroup.com 202.835.1444 | | | |
| Model # H9185R, HF23C | | | |
| Item Description: Lateral files | | | |
| Overall dimensions: 36"W X 18"D X 60"H | | | |
| File cases, bases, tops, drawers, shelves, drawer fronts, and doors shall be constructed of steel and fully finished. | | | |
| Base: steel, comprised of a lower pan and leveling glides. | | | |
| Leveling glides to provide minimum 5/8" adjustment. | | | |
| Drawer sides and back shall be full height to accommodate a standard hanging file with a labeling tab. | | | |
| 22-gauge steel welded construction. Units shipped fully assembled. | | Painted metal: Warm grey/tan | |
| Files shall have a front removable lock core. | | | |
| Drawer suspension slides shall be full extension, progressive, heavy duty steel. | | | |
| A safety interlock system that allows only one drawer to be opened at a time shall be standard on all files. | | | |
| The interior and exterior finish of cases shall match. | | | |
| | | | |
| | | | |
| Qty: 8 | Unit Cost: \$0.00 | Price Total | \$0.00 |
| Location: | | | |
| Stock Control Office 108, CLS Office 137 | | | |


| | | | |
|--------------------------------------------------------------------------------------|---|------------------------------------------------------------------------------------|------------------------|
| PROJECT NAME: USASOC SOF SSA | | Job Order Number: | 90302.002 |
| USACE SAW | | Date: | 9/21/2022 |
| BASE: FORT BRAGG, NC | | Item Name: | STORAGE CABINET - 30"W |
| | | Item Number: | SF-03 |
| | | | |
| Source: | | Photo: | |
| 0 | |  | |
| POC: David Marks | | | |
| EMAIL: dmarks@cofcogroup.com 202.835.1444 | | | |
| | | | |
| Model #HF23C, HSC1842 | | | |
| | | | |
| Item Description: Brigade Storage Cabinet | | | |
| Overall dimensions: 30"W x 18-1/8"D x 42"H | | | |
| Ability to Key Alike: Yes | | | |
| Counterweight: No | | | |
| Door Type: Hinged | | Finish Samples: Painted metal: Warm grey/tan Laminate Top: White | |
| Pull Style: Brigade | | | |
| Shelf Count: 6; (5) Adjustable Shelves | | | |
| Shelf Type: Adjustable, Fixed | | | |
| Reinforced steel doors on heavy-duty hinges | | | |
| All shelves are adjustable in 2" increments | | | |
| Three-point lock mechanism | | | |
| Front leveling glides | | | |
| Laminate counter top | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| Qty: | 2 | Unit Cost: | \$0.00 |
| Price Total | | \$0.00 | |
| Location: | | | |
| Copy 112, Open Office 114 | | | |
| | | | |


| | | | |
|--------------------------------------------------------------------------------------|-------------------|-------------------------------------------------------------------------------------|------------------------|
| PROJECT NAME: USASOC SOF SSA | | Job Order Number: | 90302.002 |
| USACE SAW | | Date: | 9/21/2022 |
| BASE: FORT BRAGG, NC | | Item Name: | STORAGE CABINET - 36"W |
| | | Item Number: | SF-03A |
| | | | |
| Source: | | Photo: | |
| 0 | |  | |
| POC: David Marks | | | |
| EMAIL: dmarks@cofcogroup.com 202.835.1444 | | | |
| | | | |
| Model #HF23C, HSC1872 | | | |
| | | | |
| Item Description: Brigade Storage Cabinet | | | |
| Overall dimensions: 36"W x 18-1/8"D x 72"H | | | |
| Ability to Key Alike: Yes | | | |
| Counterweight: No | | | |
| Door Type: Hinged | | Finish Samples: Painted metal: Warm grey/tan | |
| Pull Style: Brigade | | | |
| Shelf Count: 6; (5) Adjustable Shelves | | | |
| Shelf Type: Adjustable, Fixed | | | |
| Reinforced steel doors on heavy-duty hinges | | | |
| All shelves are adjustable in 2" increments | | | |
| Three-point lock mechanism | | | |
| Front leveling glides | | | |
| | | | |
| | | | |
| Qty: 4 | Unit Cost: \$0.00 | Price Total | \$0.00 |
| Location: | | | |
| CLS Office 137 | | | |


| | | | | | |
|---------------------------------------------------------------------------------------|--|--|--|------------------------------------------------------------------------------------|-----------|
| PROJECT NAME: USASOC SOF SSA | | | | Job Order Number: | 90302.002 |
| USACE SAW | | | | Date: | 9/21/2022 |
| BASE: FORT BRAGG, NC | | | | Item Name: | BOOKCASE |
| | | | | Item Number: | SF-04 |
| | | | | | |
| Source: 0 | | | | Photo: | |
| POC: David Marks | | | |  | |
| EMAIL: dmarks@cofcogroup.com 202.835.1444 | | | | | |
| | | | | | |
| Model # H105534 | | | | | |
| | | | | | |
| Item Description: Freestanding Wood Veneer Bookcase | | | | | |
| Overall dimensions: 36"W x 13.13"D x 57.13"H | | | | | |
| Leveling Glides | | | | | |
| (4) Adjustable shelves | | | | | |
| Wood Veneer | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| Qty: 6 Unit Cost: \$0.00 Price Total \$0.00 | | | | | |
| Location: | | | | Wood Veneer Finish: Walnut to match DL-01 | |
| Offices 103 through 106, PBO Offices 109 and 110 | | | | | |
| | | | | | |
| | | | | | |


| | | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------|---|------------------------------------------------------------------------------------|----------------------|
| PROJECT NAME: USASOC SOF SSA | | Job Order Number: | 90302.002 |
| USACE SAW | | Date: | 9/21/2022 |
| BASE: FORT BRAGG, NC | | Item Name: | MAGNETIC MARKERBOARD |
| | | Item Number: | AC-01 |
| | | | |
| Source: | | Photo: | |
| 0 | |  | |
| POC: David Marks | | | |
| EMAIL: dmarks@cofcogroup.com 202.835.1444 | | | |
| | | | |
| Model #: C-LCS668-4, C-820L | | | |
| | | | |
| Item Description: Magnetic Marker Board, Aluminum Frame | | | |
| Overall Dimensions: 60"W x 48"H | | | |
| Porcelain enameled steel writing surface with aluminum frame, backed with material sufficiently rigid to prevent flexing. | | | |
| Surface shall be capable of accepting magnetic accessories. | | | |
| Frame shall totally and securely enclose the marker board to prevent any movement. Aluminum frame shall be extruded and anodized. | | | |
| Provide full width marker tray of sufficient size to hold a standard eraser. Marker tray shall be permanently attached to bottom of marker board. | | Finish Samples: | |
| Include (4) write on/wipe off markers and eraser. | | Finish: | |
| Include all mounting brackets for a safe and secure installation. | | Board: Manufacturer's standard selection, white. | |
| | | Frame: Manufacturer's standard aluminum selection, clear anodized. | |
| | | | |
| | | | |
| | | | |
| Qty: | 6 | Unit Cost: | \$0.00 |
| Price Total | | \$0.00 | |
| Location: | | | |
| Office 103 - 106, PBO Office 109 -110 | | | |
| | | | |


| | | | | | |
|--------------------------------------------------------------------------------------|--|--|--|------------------------------------------------------------------------------------|--|
| PROJECT NAME: USASOC SOF SSA | | | | Job Order Number: 90302.002 | |
| USACE SAW | | | | Date: 9/21/2022 | |
| BASE: FORT BRAGG, NC | | | | Item Name: TRASH RECEPTACLES | |
| | | | | Item Number: AC-02 | |
| Source: | | | | Photo: | |
| 0 | | | |  | |
| WG641242SS | | | | | |
| POC: David Marks | | | | | |
| EMAIL: dmarks@cofcogroup.com 202.835.1444 | | | | | |
| Model #: CW1471 | | | | | |
| Item Description: Stainless Steel Bullet Open Top | | | | | |
| Dimensions: 18-8/9" Dia x 32-2/7"H | | | | | |
| 20.9 lbs | | | | | |
| Flat Lid | | | | | |
| Brushed Stainless Steel | | | | | |
| 30 Gallon (115L) Capacity | | | | | |
| 12" Opening | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| Qty: 2 Unit Cost: \$0.00 Price Total \$0.00 | | | | | |
| Location: | | | | Finish Samples: | |
| Break Room 118, CLS Office 137 | | | | Finish: Brushed Stainless Steel | |


| | | | | | |
|-------------------------------------------------------------------------------------------------------------|--|--|--|------------------------------------------------------------------------------------|--|
| PROJECT NAME: USASOC SOF SSA | | | | Job Order Number: 90302.002 | |
| USACE SAW | | | | Date: 9/21/2022 | |
| BASE: FORT BRAGG, NC | | | | Item Name: PERSONAL TRASH BIN | |
| | | | | Item Number: AC-03 | |
| Source: | | | | Photo: | |
| 0 | | | |  | |
| POC: David Marks | | | | | |
| EMAIL: dmarks@cofcogroup.com 202.835.1444 | | | | | |
| Model #: FG295600BEIG | | | | | |
| Item Description: Rubbermaid Plastic Wastebasket | | | | | |
| Dimensions: 10-1/4"D x 14-3/8"W x 15"H | | | | | |
| 7 gallon Capacity | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | Finish Samples: | |
| | | | | Finish: Black | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| Qty: 22 | | | | Unit Cost: \$0.00 | |
| Price Total | | | | \$0.00 | |
| Location: | | | | | |
| All private offices, open office seats, mother's room, conference room, and customer service waiting areas. | | | | | |


| | | | |
|--------------------------------------------------------------------------------------|---|------------------------------------------------------------------------------------|--------------|
| PROJECT NAME: USASOC SOF SSA | | Job Order Number: | 90302.002 |
| USACE SAW | | Date: | 9/21/2022 |
| BASE: FORT BRAGG, NC | | Item Name: | REFRIGERATOR |
| | | Item Number: | AC-04 |
| Source: | | Photo: | |
| 0 | |  | |
| POC: David Marks | | | |
| EMAIL: dmarks@cofcogroup.com 202.835.1444 | | | |
| Model #: GTS19KYNRFS | | | |
| Item Description: GE® 19.2 Cu. Ft. Top-Freezer Refrigerator | | | |
| Dimensions: 66-3/8"H x 29-3/4"W x 34-1/2"D | | | |
| Fingerprint Resistant Stainless | | | |
| Door Swing: Reversible Hinges | | | |
| Total Capacity (cubic feet): 19.2 cu ft | | | |
| Fresh Food Capacity: 13.59 cu ft | | | |
| Freezer Capacity: 5.57 cu ft | | | |
| Control Type: Dual, Rear Freezer, & Upfront Fresh Food Controls | | | |
| Fresh Food Cabinet Shelves: 1 Glass Drawer Cover, 2 Adjustable, 2 Full-Width | | | |
| Fresh Food Door Bins: 2 Total | | | |
| Fresh Food Door Shelves: ,1 with Gallon Storage, 2 Total | | | |
| Fresh Food Cabinet Drawers: 1 Snack Drawer, 2 Clear, 3 Total | | | |
| Freezer Cabinet Shelves: 1 Adjustable Glass, 2 Fixed | | | |
| | | Finish Samples: | |
| | | Finish: Stainless Steel | |
| | | | |
| | | | |
| Qty: | 1 | Unit Cost: | \$0.00 |
| Price Total | | \$0.00 | |
| Location: | | | |
| Break Room 118 | | | |


| | | | |
|--------------------------------------------------------------------------------------|--|------------------------------------------------------------------------------------|--------------|
| PROJECT NAME: USASOC SOF SSA | | Job Order Number: | 90302.002 |
| USACE SAW | | Date: | 9/21/2022 |
| BASE: FORT BRAGG, NC | | Item Name: | COFFEE MAKER |
| | | Item Number: | AC-05 |
| Source: | | Photo: | |
| 0 | |  | |
| POC: David Marks | | | |
| EMAIL: dmarks@cofcogroup.com 202.835.1444 | | | |
| Model #: SS-20P1 | | | |
| Item Description: COFFEE CENTER® | | | |
| Dimensions: 11.0"L x 10.8"W x 14.5"H | | | |
| 10-CUP Thermal Coffeemaker and Single-Serve Brewer | | | |
| 3 serving sizes: 6, 8, 10 oz. | | | |
| Removable 40 oz. reservoir | | | |
| Energy Save mode | | | |
| Fully automatic – 24-hour brew start, self-clean, ready alert | | | |
| | | Finish Samples: | |
| | | Finish: Black/Stainless steel | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| Qty: 2 | | Unit Cost: | \$0.00 |
| Location: | | Price Total | \$0.00 |
| Break Room 118, CLS Office 137 | | | |
| | | | |

| | | | | | |
|--------------------------------------------------------------------------------------|--|--|--|------------------------------------------------------------------------------------|--|
| PROJECT NAME: USASOC SOF SSA | | | | Job Order Number: 90302.002 | |
| USACE SAW | | | | Date: 9/21/2022 | |
| BASE: FORT BRAGG, NC | | | | Item Name: MICROWAVE | |
| | | | | Item Number: AC-06 | |
| Source: | | | | Photo: | |
| 0 | | | |  | |
| POC: David Marks | | | | | |
| EMAIL: dmarks@cofcogroup.com 202.835.1444 | | | | | |
| Model #: PEB9159SJSS | | | | | |
| Description: GE Profile Countertop Convection/Microwave Oven | | | | | |
| Dimensions: 13"H x 21-3/4"W x 20"D | | | | | |
| 1.5 cu. ft. capacity | | | | | |
| Microwave Watts (IEC-705): 1000.0 W | | | | | |
| ADA Compliant | | | | | |
| 10 Power Levels | | | | | |
| 2 Removable Oven Racks - Pedestal | | | | Finish Samples: | |
| Turntable Size: 13.5 in | | | | Finish: Stainless Steel | |
| Electrical Input - 120V Amperage13.0 | | | | | |
| Electrical Input - 120V Watts1500 | | | | | |
| Frequency (MHz): 2450 | | | | | |
| Volts/Hertz: 120V; 60Hz | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| Qty: 2 Unit Cost: \$0.00 Price Total \$0.00 | | | | | |
| Location: | | | | | |
| Break Room 118, CLS Office 137 | | | | | |
| | | | | | |


| | | | |
|--------------------------------------------------------------------------------------|---|------------------------------------------------------------------------------------|---------------------------|
| PROJECT NAME: USASOC SOF SSA | | Job Order Number: | 90302.002 |
| USACE SAW | | Date: | 9/21/2022 |
| BASE: FORT BRAGG, NC | | Item Name: | UNDERCOUNTER REFRIGERATOR |
| | | Item Number: | AC-07 |
| | | | |
| Source: | | Photo: | |
| 0 | |  | |
| POC: David Marks | | | |
| EMAIL: dmarks@cofcogroup.com 202.835.1444 | | | |
| Model #: FF1843BCSSADA | | | |
| Description: 18" Wide Built-In All-Refrigerator, ADA Compliant | | | |
| Dimensions: 31.5" H x 17.75" W x 24" D | | | |
| ADA Height | | | |
| Stainless steel door | | | |
| Capacity: 2.7 cu.ft. (76 L | | | |
| Defrost Type: Automatic | | | |
| US Electrical Safety: ETL | | Finish Samples: | |
| Energy Usage/Year: 250.0kWh/year | | Finish: Stainless Steel Door w/ Black Interior Cabinet | |
| Amps: 1.1 | | | |
| Voltage/Frequency: 115 V AC/60 Hz | | | |
| Weight: 103.0 lbs. (47 kg) | | | |
| Reversible Door Swing | | | |
| Chrome Shelf | | | |
| Thermostat Type: Digital | | | |
| Self-closing door | | | |
| LED lighting | | | |
| | | | |
| Qty: | 2 | Unit Cost: | \$0.00 |
| Price Total | | \$0.00 | |
| Location: | | | |
| CLS Office 137, Mother's 119 | | | |
| | | | |


| | | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------------------------------------------------------------|--------------------|
| PROJECT NAME: USASOC SOF SSA | | Job Order Number: | 90302.002 |
| USACE SAW | | Date: | 9/21/2022 |
| BASE: FORT BRAGG, NC | | Item Name: | EWASTE RECYCLE BIN |
| | | Item Number: | AC-08 |
| | | | |
| Source: | | Photo: | |
| 0 | |  | |
| POC: | | | |
| EMAIL: | | | |
| | | | |
| Model #: | | | |
| | | | |
| Description: Eco Nexus 16G Battery Recycle Bin | | | |
| Dimensions: 27" H x 21" W x 14" D | | | |
| Standard flip lid | | | |
| Integral bag holder system to keep sack in place | | | |
| Colored recycling lid to help users identify the intended waste stream (confirm with users which E Waste bin is preferred prior to placing order) | | | |
| Removable top for convenient emptying | | Finish Samples: | |
| Domed lid prevents waste being left on top of bin. | | Body: Mid Gray or blue | |
| Easy to clean | | Lid and Graphics: Blue or magenta | |
| Supplied with either a small or large decal as standard. | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| Qty: 2 | | Unit Cost: | \$0.00 |
| Price Total | | \$0.00 | |
| Location: | | | |
| Copy 112, Warehouse 129 | | | |
| | | | |



| | | | |
|---------------------------------------------------------------------------------------------------|-------------------|------------------------------------------------------------------------------------|------------|
| PROJECT NAME: USASOC SOF SSA | | Job Order Number: | 90302.002 |
| USACE SAW | | Date: | 9/21/2022 |
| BASE: FORT BRAGG, NC | | Item Name: | TASK LIGHT |
| | | Item Number: | AC-09 |
| | | | |
| Source: | | Photo: | |
| 0 | |  | |
| POC: | | | |
| EMAIL: | | | |
| | | | |
| Model #: EDEBW | | | |
| | | | |
| Description: Task Light, Desktop Base | | | |
| Maximum Reach: 28" | | | |
| 135 degree front-to-back head tilt; 90 degree side-to-head rotation; 360 degree swivel from base. | | | |
| Working height: 18" | | | |
| Color temperature 3000K. Lifespan rated up to 50,000 hours. | | | |
| Power consumption: 7 watt bulb, lowest setting utilizes 0.5 watts. | | | |
| Intuitive 7-Step dimmer function. | | | |
| MCX LED Technology. | | | |
| Internal counterbalance allows for one-touch positioning. | | | |
| Desktop base. | | | |
| Contains 81% recycled content (55% post-consumer, 26% pre-consumer) and 99% recyclable. | | | |
| High-performance LED consumes just 7 watts of power. | | | |
| Color rendering index: 89 | | | |
| | | | |
| | | | |
| Qty: 28 | Unit Cost: \$0.00 | Price Total | \$0.00 |
| Location: | | | |
| Open Office 114, Warehouse 129, GIP Warehouse 134, CLS Office 137 | | | |


| | | | |
|-----------------------------------------------------------------------------------------------------|--|------------------------------------------------------------------------------------|--|
| PROJECT NAME: USASOC SOF SSA | | Job Order Number: 90302.002 | |
| USACE SAW | | Date: 9/21/2022 | |
| BASE: FORT BRAGG, NC | | Item Name: 59" DRAWER CABINET | |
| | | Item Number: EQ-02 | |
| | | | |
| Source: | | Photo: | |
| 0 | |  | |
| POC: | | | |
| EMAIL: | | | |
| | | | |
| Model #: | | | |
| | | | |
| Item Description: | | | |
| Dimensions: 45"W x 28"D x 48"H | | | |
| Base Compartment: SCU1917AL | | | |
| 5-Drawers: (1) 7"H, (1) 8"H, (1) 9"H, (1) 10"H, (1) 18"H | | | |
| Include 9-compartment interior drawer with 7-1/2" X 7-7/8" compartments. | | | |
| Confirm with users other types/quantities of compartments for each drawer required before ordering. | | Finish Samples: | |
| Center-mounted hinge lock bars secured with a single padlock. | | Finish: Painted metal | |
| Four-Way Pallet Base | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| Qty: 15 Unit Cost: \$0.00 Price Total: \$0.00 | | | |
| Location: | | | |
| | | | |
| | | | |
| | | | |


| | | | | | |
|----------------------------------------------------|--|--|--|------------------------------------------------------------------------------------|--|
| PROJECT NAME: USASOC SOF SSA | | | | Job Order Number: 90302.002 | |
| USACE SAW | | | | Date: 9/21/2022 | |
| BASE: FORT BRAGG, NC | | | | Item Name: 59" OVERHEAD CABINET | |
| | | | | Item Number: EQ-03 | |
| Source: | | | | Photo: | |
| 0 | | | |  | |
| POC: | | | | | |
| EMAIL: | | | | | |
| | | | | | |
| Model #: | | | | | |
| | | | | | |
| Item Description: | | | | | |
| Shelf Door Top Cabinet: 0200 | | | | | |
| Dimensions: 36"W x 24"D x 48"H | | | | | |
| (2) Compartments with Doors | | | | | |
| Locking Mechanism | | | | | |
| (1) Shelf | | | | | |
| | | | | Finish Samples: | |
| | | | | Finish: Painted metal | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| Qty: 15 Unit Cost: \$0.00 Price Total \$0.00 | | | | | |
| Location: | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

| | | | | | |
|-------------------------------------------------------------------------|--|--|--|------------------------------------------------------------------------------------|--|
| PROJECT NAME: USASOC SOF SSA | | | | Job Order Number: 90302.002 | |
| USACE SAW | | | | Date: 9/21/2022 | |
| BASE: FORT BRAGG, NC | | | | Item Name: BATTERY CONTAINMENT PALLET | |
| | | | | Item Number: EQ-04 | |
| | | | | | |
| Source: | | | | Photo: | |
| 0 | | | |  | |
| POC: | | | | | |
| EMAIL: | | | | | |
| | | | | | |
| Model #: | | | | | |
| | | | | | |
| Item Description: Drum Spill Containment Pallet | | | | | |
| Dimensions: 51.5"L X 51.5"W X 8"H | | | | | |
| For 4 55 gallon drums, 66 gallon spill capacity, 8,000 lb load capacity | | | | | |
| Poly gratings-black, with 1-3/4" openings, 3/4" drain plug | | | | | |
| Includes drain | | | | | |
| For indoor use | | | | | |
| Pallet material - Polyethylene | | | | Finish Samples: | |
| 2-way forklift pockets | | | | Finish: | |
| Pallet color - yellow | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| Qty: 8 Unit Cost: \$0.00 Price Total \$0.00 | | | | | |
| Location: | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |


| | | | | | |
|-----------------------------------------------------------------------------------------------------|--|--|--|------------------------------------------------------------------------------------|--------|
| PROJECT NAME: USASOC SOF SSA | | | | Job Order Number: 90302.002 | |
| USACE SAW | | | | Date: 9/21/2022 | |
| BASE: FORT BRAGG, NC | | | | Item Name: 59" DRAWER CABINET, HEAVY STORAGE | |
| | | | | Item Number: EQ-06 | |
| Source: | | | | Photo: | |
| 0 | | | |  | |
| POC: | | | | | |
| EMAIL: | | | | | |
| | | | | | |
| Model #: | | | | | |
| | | | | | |
| Item Description: Drawer Cabinet | | | | | |
| Bottom Cabinet | | | | | |
| Dimensions: 45"W x 27-1/2"D x 59"H | | | | | |
| 8-Drawers top to bottom: (Drawers 1-6) 6"H, (Drawers 7-8) 8"H | | | | | |
| Confirm with users other types/quantities of compartments for each drawer required before ordering. | | | | | |
| Center-mounted hinge lock bars secured with a single padlock. | | | | | |
| Four-Way Pallet Base | | | | | |
| | | | | Finish Samples: | |
| | | | | Finish: Painted metal | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| Qty: 7 | | | | Unit Cost: | \$0.00 |
| Price Total | | | | \$0.00 | |
| Location: | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

| | | | | | |
|-------------------------------------------------------|--|-------------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| PROJECT NAME: USASOC SOF SSA | | | | Job Order Number: 90302.002 | |
| USACE SAW | | | | Date: 9/21/2022 | |
| BASE: FORT BRAGG, NC | | | | Item Name: 21" OVERHEAD CABINET | |
| | | | | Item Number: EQ-07 | |
| Source: | | | | Photo: | |
| 0 | | | |  <p>Overhead cabinet with recessed door</p>  | |
| POC: | | | | | |
| EMAIL: | | | | | |
| | | | | | |
| Model #: | | | | | |
| | | | | | |
| Item Description: Overhead Cabinet with Recessed Door | | | | | |
| Dimensions: 45"W x 27-1/2"D x 20.75"H | | | | | |
| | | | | | |
| | | | | | |
| | | | | Finish Samples: | |
| | | | | Finish: Painted metal | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| Qty: 7 | | Unit Cost: \$0.00 | | Price Total \$0.00 | |
| Location: | | | | | |
| | | | | | |
| | | | | | |


| | | | | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------|----|------------------------------------------------------------------------------------|---------------|-------------|--------|
| PROJECT NAME: USASOC SOF SSA | | Job Order Number: | 90302.002 | | |
| USACE SAW | | Date: | 9/21/2022 | | |
| BASE: FORT BRAGG, NC | | Item Name: | SHELVING UNIT | | |
| | | Item Number: | EQ-08 | | |
| | | | | | |
| Source: | | Photo: | | | |
| 0 | |  | | | |
| POC: | | | | | |
| EMAIL: | | | | | |
| | | | | | |
| Model #: | | | | | |
| | | | | | |
| Item Description: 4 Level Bulk Storage Rack w/Solid Decking Starter | | | | | |
| Dimensions: 72"W X 24"D X 96"H | | | | | |
| 4 Levels with solid decking | | | | | |
| Capacity - 1,900 lbs per level | | | | | |
| Includes: Upright 24"D X 96"H (qty. 2), Adjustable Beams 72"W (qty. 8), Front-to-back Supports 24"D (qty. 8), Solid Decking Panel 36"X24" (qty.8) | | Finish Samples: | | | |
| Uprights are fully welded, 14-gauge steel - Slots provide easy vertical adjustment of beams | | Finish: Dove Gray powdercoat | | | |
| Heavy-duty beams are 14-gauge steel - "Z" beam design increases strength and load capacity, resisting tipping | | | | | |
| Closed decking creates a smooth, uninterrupted surface; decking rests on the 5/8" step of the beams which prevents decking from sliding | | | | | |
| Front-to-back supports under the decking panels helps maintain rigidity and stability when supporting heavy loads | | | | | |
| | | | | | |
| | | | | | |
| Qty: | 10 | Unit Cost: | \$0.00 | Price Total | \$0.00 |
| Location: | | | | | |
| | | | | | |
| | | | | | |

| | | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------|---|------------------------------------------------------------------------------------|---------------|
| PROJECT NAME: USASOC SOF SSA | | Job Order Number: | 90302.002 |
| USACE SAW | | Date: | 9/21/2022 |
| BASE: FORT BRAGG, NC | | Item Name: | SHELVING UNIT |
| | | Item Number: | EQ-08A |
| | | | |
| Source: | | Photo: | |
| 0 | |  | |
| POC: | | | |
| EMAIL: | | | |
| | | | |
| Model #: | | | |
| | | | |
| Item Description: 4 Level Bulk Storage Rack w/Solid Decking Starter | | | |
| Dimensions: 96"W X 24"D X 96"H | | | |
| 4 Levels with solid decking | | | |
| Capacity - 1,900 lbs per level | | | |
| Includes: Upright 24"D X 96"H (qty. 2), Adjustable Beams 96"W (qty. 8), Front-to-back Supports 24"D (qty. 8), Solid Decking Panel 48"X24" (qty.8) | | Finish Samples: | |
| Uprights are fully welded, 14-gauge steel - Slots provide easy vertical adjustment of beams | | Finish: Dove Gray powdercoat | |
| Heavy-duty beams are 14-gauge steel - "Z" beam design increases strength and load capacity, resisting tipping | | | |
| Closed decking creates a smooth, uninterrupted surface; decking rests on the 5/8" step of the beams which prevents decking from sliding | | | |
| Front-to-back supports under the decking panels helps maintain rigidity and stability when supporting heavy loads | | | |
| | | | |
| Qty: | 1 | Unit Cost: | \$0.00 |
| Price Total | | \$0.00 | |
| Location: | | | |
| | | | |
| | | | |

| | | | | | |
|----------------------------------------------------|--|--|--|------------------------------------------------------------------------------------|--|
| PROJECT NAME: USASOC SOF SSA | | | | Job Order Number: 90302.002 | |
| USACE SAW | | | | Date: 9/21/2022 | |
| BASE: FORT BRAGG, NC | | | | Item Name: OPEN SHELF UNIT | |
| | | | | Item Number: EQ-09 | |
| Source: | | | | Photo: | |
| 0 | | | |  | |
| POC: | | | | | |
| EMAIL: | | | | | |
| | | | | | |
| Model #: | | | | | |
| | | | | | |
| Item Description: Shelf Cabinets | | | | | |
| Dimensions: 30"W x 24"D x 44"H | | | | | |
| Ideal for bulk material storage. | | | | | |
| No doors. | | | | | |
| (1) 400 lb capacity shelf per unit. | | | | | |
| Heavy-duty metal preconfigured shelf cabinets. | | | | | |
| | | | | Finish Samples: | |
| | | | | Finish: | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| Qty: 80 Unit Cost: \$0.00 Price Total \$0.00 | | | | | |
| Location: | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

| | | | | | |
|------------------------------------------------------------------------------|--|--|--|------------------------------------------------------------------------------------|--|
| PROJECT NAME: USASOC SOF SSA | | | | Job Order Number: 90302.002 | |
| USACE SAW | | | | Date: 9/21/2022 | |
| BASE: FORT BRAGG, NC | | | | Item Name: WIRE BIN STORAGE | |
| | | | | Item Number: EQ-13 | |
| Source: | | | | Photo: | |
| 0 | | | |  | |
| POC: | | | | | |
| EMAIL: | | | | | |
| | | | | | |
| Model #: | | | | | |
| | | | | | |
| Item Description: Wire Container | | | | | |
| Overall dimensions: 40"D X 48"W X 42.5"H | | | | | |
| Inside dimensions: 38"D X 46"W X 36"H | | | | | |
| Side and base mesh is 2" X 2". | | | | | |
| Drop front gate with four latch bolts to engage for quick and easy assembly. | | | | | |
| Four way entry for forklifts and pallet jacks, with a clearance of 4.5". | | | | | |
| Can be stacked up to four high fully loaded. | | | | | |
| Heavy-duty base design for long life cycles. | | | | | |
| The casters are 4" X 2" phenolic - (2) rigid, (2) swivel. | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| Qty: 22 Unit Cost: \$0.00 Price Total \$0.00 | | | | | |
| Location: | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

Section 5: Furniture Plans

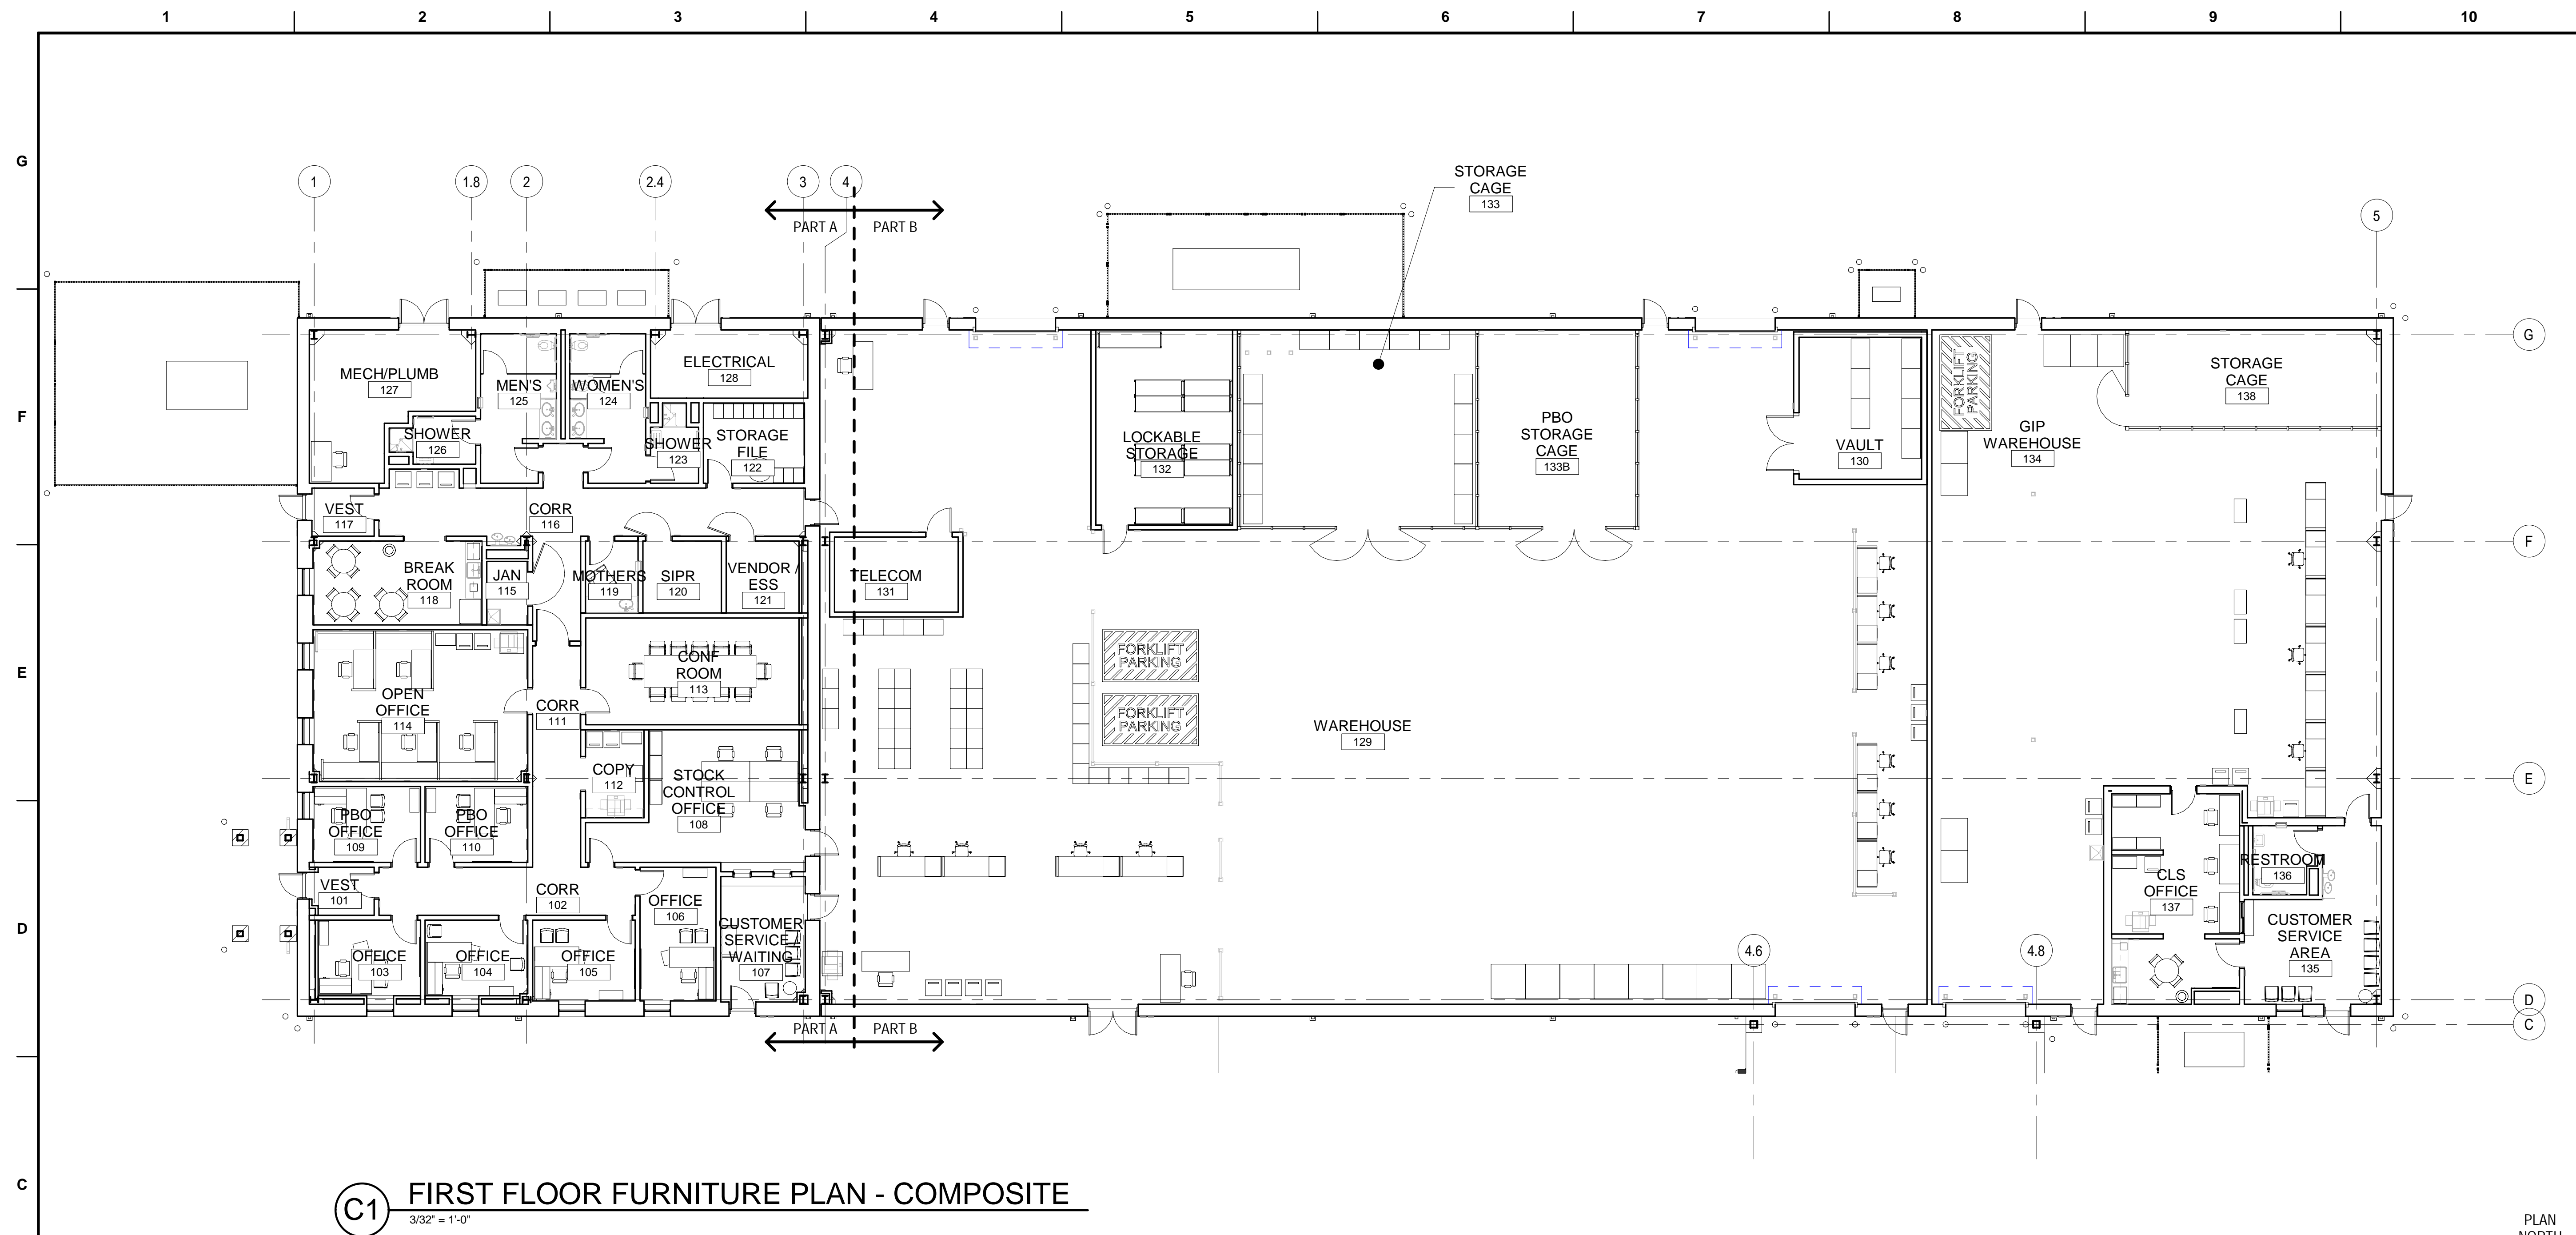


GENERAL SHEET NOTES

1. REFER TO PARTIAL PLANS ON SHEETS I-101 AND I-102 FOR MORE INFORMATION.
2. REFER TO EQUIPMENT PLANS FOR LOCATIONS OF BOLTED-DOWN, CONTRACTOR INSTALLED EQUIPMENT ITEMS FOR COORDINATION.

SHEET KEYNOTES

SHEET LEGEND

GRAPHIC SCALE



US Army Corps
of Engineers®

[illegible]

| | |
|--------------------|------------------------------------|
| CAS | SEPT 2022 |
| DRAWN BY: CAS | SOLICITATION NO.: W912PM22R0015 |
| CHECKED BY: FAH | CONTRACT NO.: W912PM19-D-0004 |
| SUBMITTED BY: | FIRST TITLE |
| SIZE: ANSI D | SECOND TITLE |

US ARMY CORPS OF ENGINEERS
WILMINGTON DISTRICT
69 DARLINGTON AVENUE
WILMINGTON, NORTH CAROLINA 28403-1343


WHITMAN, REQUARDT & ASSOCIATES, LLP
901 SOUTH CAROLINE STREET

**FORT BRAGG, NORTH CAROLINA
SOF SUPPLY SUPPORT ACTIVITY
PROJECT 87447
FIRST FLOOR PLAN - FURNITURE - COMPOSITE**


HEET ID

-100


READY TO ADVERTISE

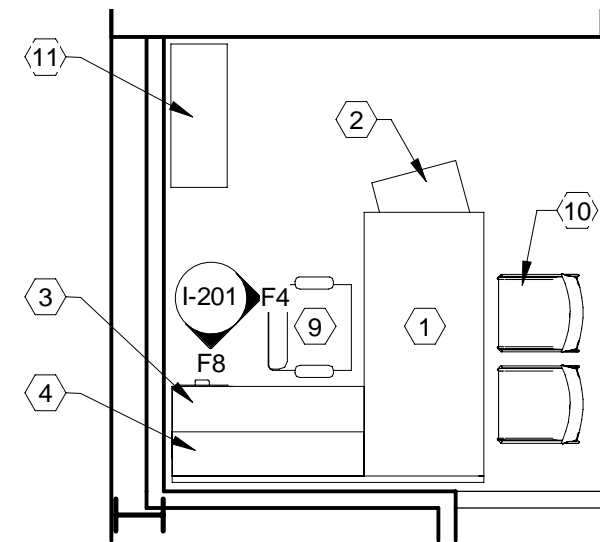


F1 DL-01 PRIVATE OFFICE TYPICAL - PLAN VIEW
1/4" = 1'-0"

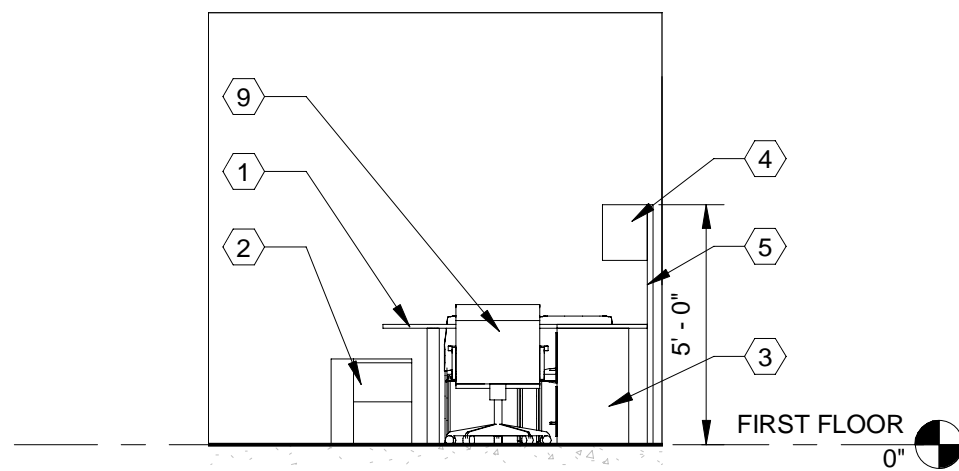


F4 DL-01 PRIVATE OFFICE TYPICAL - WEST ELEVATION
1/4" = 1'-0"

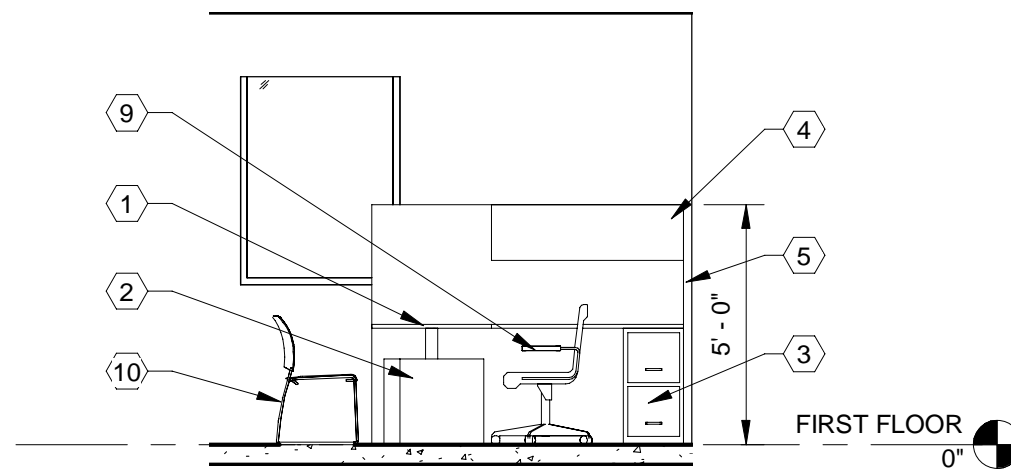


F8 DL-01 PRIVATE OFFICE TYPICAL - NORTH ELEVATION
1/4" = 1'-0"

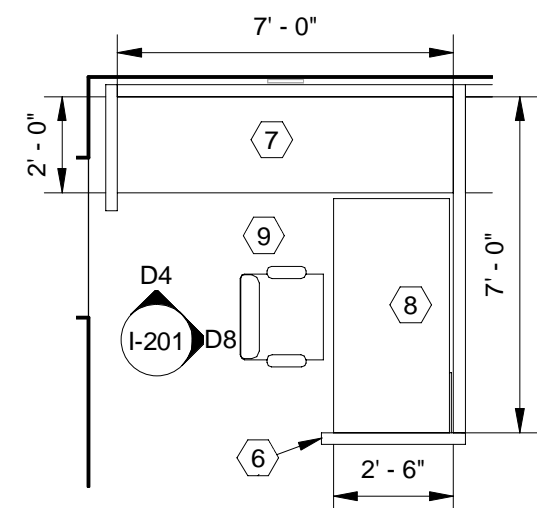


(D1) WS-01 WORKSTATION TYPICAL - PLAN VIEW
1/4" = 1'-0"

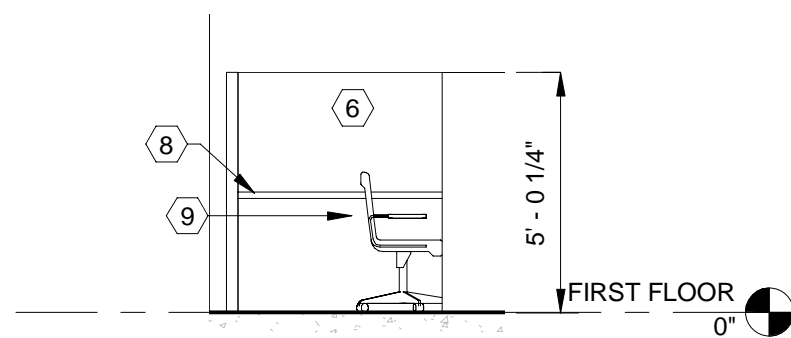


D4 WS-01 WORKSTATION TYPICAL - NORTH ELEVATION
1/4" = 1'-0"

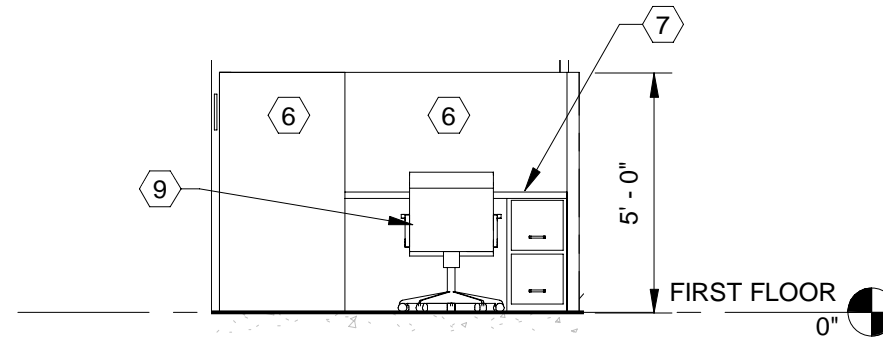

(D8) WS-01 WORKSTATION TYPICAL - EAST ELEVATION
1/4" = 1'-0"

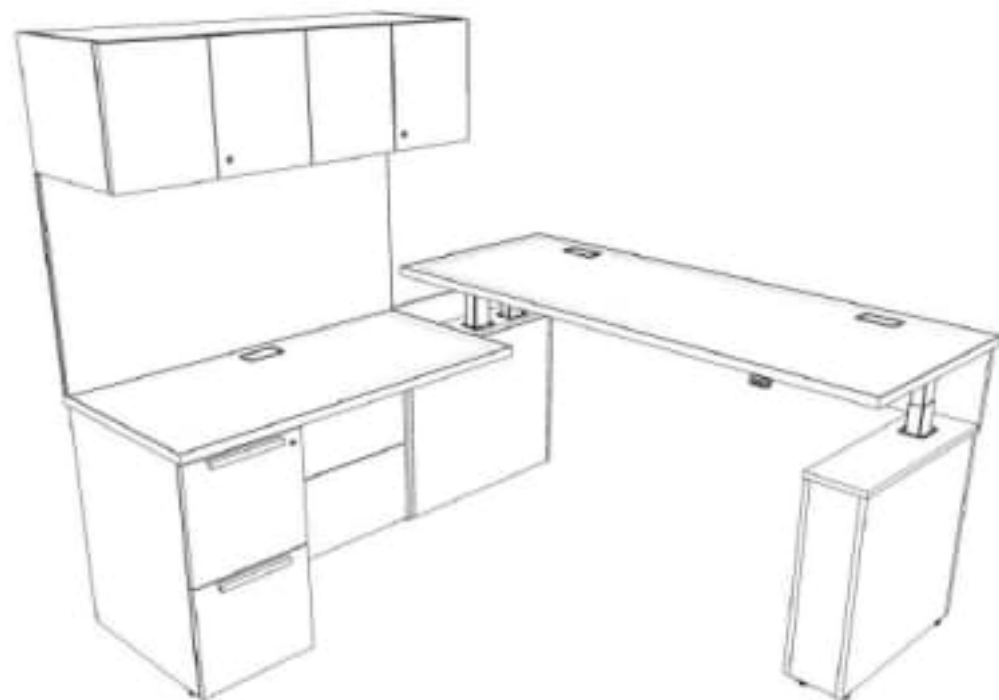

(B1) DL-01 PRIVATE OFFICE ISOMETRIC VIEW
3" = 1'-0"

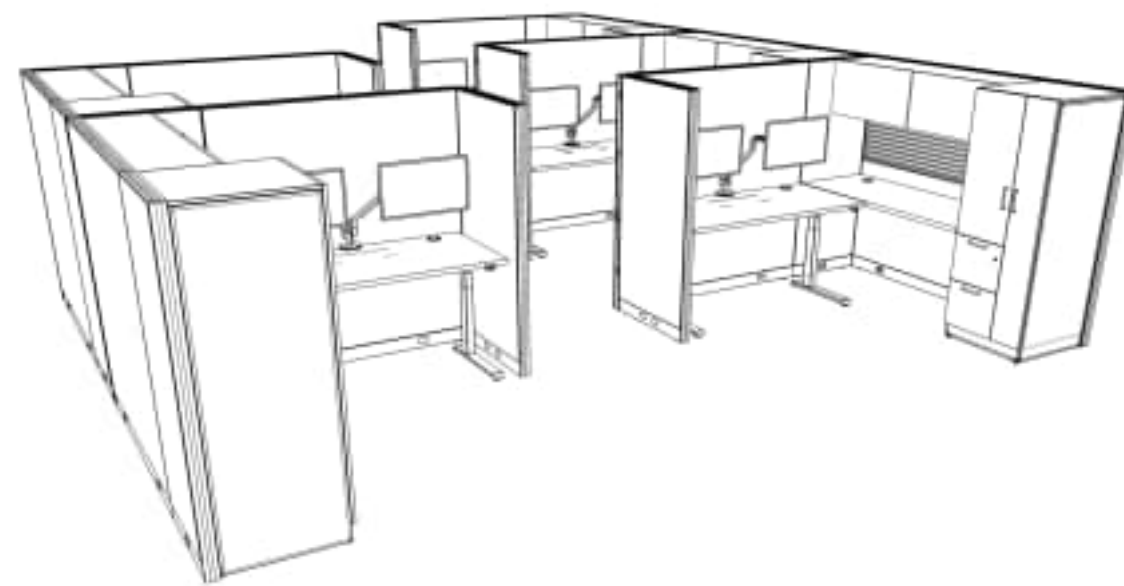

(B4) WS-01 WORKSTATION ISOMETRIC VIEW
3" = 1'-0"


GENERAL SHEET NOTES

1. SEE SHEETS I-101 AND I-102 FOR FURNITURE PLANS.
2. SYSTEMS FURNITURE POWER REQUIREMENTS: 8 WIRE SYSTEM, 3 CIRCUITS, 3 SEPARATE NEUTRALS. COORDINATE WITH ELECTRICAL.

- | | | | |
|---|---------------------------------------------------------------------------------------------|----|--------------------|
| 1 | 72"W X 30"D HEIGHT ADJUSTABLE WORKSURFACE W/FRONT HALF-HEIGHT MODESTY PANEL | 9 | TASK CHAIR, CT-01 |
| 2 | 24"D MOBILE BOX/BOX/FILE STORAGE PEDESTAL | 10 | GUEST CHAIR, CG-01 |
| 3 | 48"W X 24"D WOOD VENEER WORKSURFACE WITH FIXED FILE/FILE STORAGE PEDESTAL | 11 | BOOKCASE, SF-04 |
| 4 | 48"W WOOD VENEER OVERHEAD STORAGE UNIT WITH FLIPPER DOORS AND UNDER CABINET LED LIGHTING | | |
| 5 | FULL WIDTH TACKBOARD PANEL | | |
| 6 | 60"H MONOLITHIC FABRIC PANELS | | |
| 7 | 84"W X 24"D LAMINATE WORKSURFACE WITH FIXED 24"W FIXED FILE/FILE STORAGE PEDESTAL | | |
| 8 | 46"W X 29"W LAMINATE HEIGHT ADJUSTABLE WORKSURFACE | | |

SHEET LEGEND

GRAPHIC SCALE



**US Army Corps
of Engineers®**

[illegible]

| | |
|---------------|-------------------|
| DESIGNED BY: | ISSUE DATE: |
| CAS | SEPT 2022 |
| DRAWN BY: | SOLICITATION NO.: |
| DLM | W912PM22R0015 |
| CHECKED BY: | CONTRACT NO.: |
| FAH | W912PM-19-D-0004 |
| SUBMITTED BY: | FIRST TITLE |
| | |
| SIZE: | SECOND TITLE |
| ANSI D | |

US ARMY CORPS OF ENGINEERS
WILMINGTON DISTRICT
69 DARLINGTON AVENUE
WILMINGTON, NORTH CAROLINA 28403-1343


**FORT BRAGG, NORTH CAROLINA
SOF SUPPLY SUPPORT ACTIVITY
PROJECT 87447
INTERIOR ELEVATIONS**

SHEET ID

I-201

GENERAL SHEET NOTES

1. MOUNT SIGNAGE ON NEAREST ADJACENT WALL PER ADA WHEN WALL SPACE ON SIDE OF DOOR IS NOT AVAILABLE.
2. ALL EXACT SIGN LOCATIONS ARE SUBJECT TO APPROVAL AT PRE-INSTALLATION WALK-THOUGH PRIOR TO MOUNTING OF SIGNS.
3. SIGNAGE TO BE MOUNTED ON LATCH SIDE AT SINGLE DOORS, RIGHT SIDE OF DOUBLE DOORS.
4. REFER TO SHEETS I-107 AND I-108 FOR SIGNAGE LOCATIONS.
5. SIGNAGE SHOWING ON PLANS THAT ARE NOT LISTED IN SIGNAGE SCHEDULE ARE REQUIRED AS SHOWN ON THE PLANS.
6. REFER TO SHEET A-701 FOR EXTERIOR BUILDING SIGNAGE PLAN AND SIGNAGE DETAILS.
7. SIGN TYPE ST-4 NOT USED.



**US Army Corps
of Engineers ®**

[illegible]

| | | | |
|---------------------------------------|---------------|-------------------|-------------|
| US ARMY CORPS OF ENGINEERS | | DESIGNED BY: | ISSUE DATE: |
| WILMINGTON DISTRICT | CAS | SEP 2022 | |
| 69 DARLINGTON AVENUE | DRAWN BY: | SOLICITATION NO.: | |
| WILMINGTON, NORTH CAROLINA 28403-1343 | FAH | CONTRACT NO.: | |
| WHITMAN, REQUARDT & ASSOCIATES, LLP | CHECKED BY: | W912PMA-19-D-0004 | |
| 801 SOUTH CAROLINE STREET | SUBMITTED BY: | FIRST TITLE | |
| BALTIMORE, MARYLAND 21231 | SIZE | SECOND TITLE | |
| | ANSI D | | |


FORT BRAGG, NORTH CAROLINA
SOF SUPPLY SUPPORT ACTIVITY
PROJECT 87447
SIGNAGE SCHEDULE AND DETAILS

SHEET ID
I-501

SIGNAGE SCHEDULE

| SIGNAGE SCHEDULE | | | | |
|------------------|----------------------------|-----------|-------------------------------|-------------------------------------|
| ROOM NUMBER | ROOM NAME | SIGN TYPE | MARK | DESCRIPTION |
| 101 | VEST | ST-2 | VESTIBULE | |
| 103 | OFFICE | ST-1 | PRIVATE OFFICE | |
| 104 | OFFICE | ST-1 | PRIVATE OFFICE | |
| 105 | OFFICE | ST-1 | PRIVATE OFFICE | |
| 106 | OFFICE | ST-1 | PRIVATE OFFICE | |
| 107 | CUSTOMER SERVICE / WAITING | ST-2 | CUSTOMER SERVICE WAITING AREA | |
| 108 | STOCK CONTROL OFFICE | ST-2 | STOCK CONTROL OFFICE | |
| 108 | STOCK CONTROL OFFICE | ST-2 | STOCK CONTROL OFFICE | |
| 109 | PBO OFFICE | ST-1 | PRIVATE OFFICE | |
| 110 | PBO OFFICE | ST-1 | PRIVATE OFFICE | |
| 112 | COPY | ST-2 | COPY/ PRINT ROOM | |
| 113 | CONF ROOM | ST-2 | CONFERENCE ROOM | |
| 114 | OPEN OFFICE | ST-2 | OPEN OFFICE | |
| 114 | OPEN OFFICE | ST-3 | WORKSTATION ID - NAME/NUMBER | |
| 114 | OPEN OFFICE | ST-3 | WORKSTATION ID - NAME/NUMBER | |
| 114 | OPEN OFFICE | ST-3 | WORKSTATION ID - NAME/NUMBER | |
| 114 | OPEN OFFICE | ST-3 | WORKSTATION ID - NAME/NUMBER | |
| 114 | OPEN OFFICE | ST-3 | WORKSTATION ID - NAME/NUMBER | |
| 115 | JAN | ST-2 | JANITOR'S CLOSET | |
| 116 | CORR | ST-2 | CORRIDOR | |
| 116 | CORR | ST-5 | RESTROOMS | MALE, FEMALE, & HANDICAP PICTOGRAMS |
| 117 | VEST | ST-2 | VESTIBULE | |
| 118 | BREAK ROOM | ST-2 | BREAK ROOM | |
| 119 | MOTHERS | ST-8 | MOTHER'S ROOM | MOTHER WITH CHILD PICTOGRAM |
| 120 | SIPR | ST-2 | SIPR ROOM | |
| 121 | VENDOR / ESS | ST-2 | COMMUNICATIONS/ EF ROOM | |
| 122 | STORAGE FILE | ST-2 | STORAGE ROOM | |
| 123 | SHOWER | ST-10 | WOMEN'S SHOWER ROOM | FEMALE & HANDICAP PICTOGRAMS |
| 124 | WOMEN'S | ST-7 | WOMEN'S RESTROOM | FEMALE & HANDICAP PICTOGRAMS |
| 125 | MEN'S | ST-6 | MEN'S RESTROOM | MALE & HANDICAP PICTOGRAMS |
| 126 | SHOWER | ST-9 | MEN'S SHOWER ROOM | MALE & HANDICAP PICTOGRAMS |
| 129 | WAREHOUSE | ST-2 | WAREHOUSE | |
| 129 | WAREHOUSE | ST-2 | WAREHOUSE | |
| 130 | VAULT | ST-2 | VAULT | |
| 131 | TELECOM | ST-2 | TELECOMMUNICATION ROOM | |
| 132 | LOCKABLE STORAGE | ST-2 | LOCKABLE STORAGE | |
| 133 | STORAGE CAGE | ST-2 | STORAGE CAGE | |
| 133B | PBO STORAGE CAGE | ST-2 | PBO STORAGE CAGE | |
| 134 | GIP WAREHOUSE | ST-2 | GIP WAREHOUSE | |
| 134 | GIP WAREHOUSE | ST-2 | GIP WAREHOUSE | |
| 135 | CUSTOMER SERVICE AREA | ST-2 | CUSTOMER SERVICE AREA | |
| 135 | CUSTOMER SERVICE AREA | ST-2 | CUSTOMER SERVICE AREA | |
| 136 | RESTROOM | ST-5 | UNISEX RESTROOM | MALE, FEMALE, & HANDICAP PICTOGRAMS |
| 137 | CLS OFFICE | ST-2 | CLS OFFICE | |
| 137 | CLS OFFICE | ST-2 | CLS OFFICE | |
| 138 | STORAGE CAGE | ST-2 | STORAGE CAGE | |

GRAPHIC SCALE



①

②

③

ROOM SIGNAGE

ROOM SIGNAGE

TYPICAL SUITE SIGNAGE

3"

3' - 9"

3"


3' - 9"

3"


7' - 6"

NOTE 1: SIGNAGE TO BE MOUNTED ON LATCH SIDE AT SINGLE DOORS, RIGHT SIDE OF DOUBLE DOORS.
NOTE 2: MOUNT ON NEAREST ADJACENT WALL PER ADA WHEN WALL SPACE ON SIDE OF DOOR IS NOT AVAILABLE.
NOTE 3: MOUNT TACTILE SIGNS SUCH THAT THE BASELINE OF THE LOWEST RAISED LETTERS ARE AT 48" AFF AND THE BASELINE OF THE UPPER MOST RAISED LETTER IS AT 60" AFF.
NOTE 4: SUITE SIGNAGE TO BE MOUNTED ABOVE DOOR, AND CENTERED. 2" ABOVE DOOR FRAME. BOTTOM EDGE OF SIGN MOUNTED 90" AFF


SIGNAGE MOUNTING DETAILS
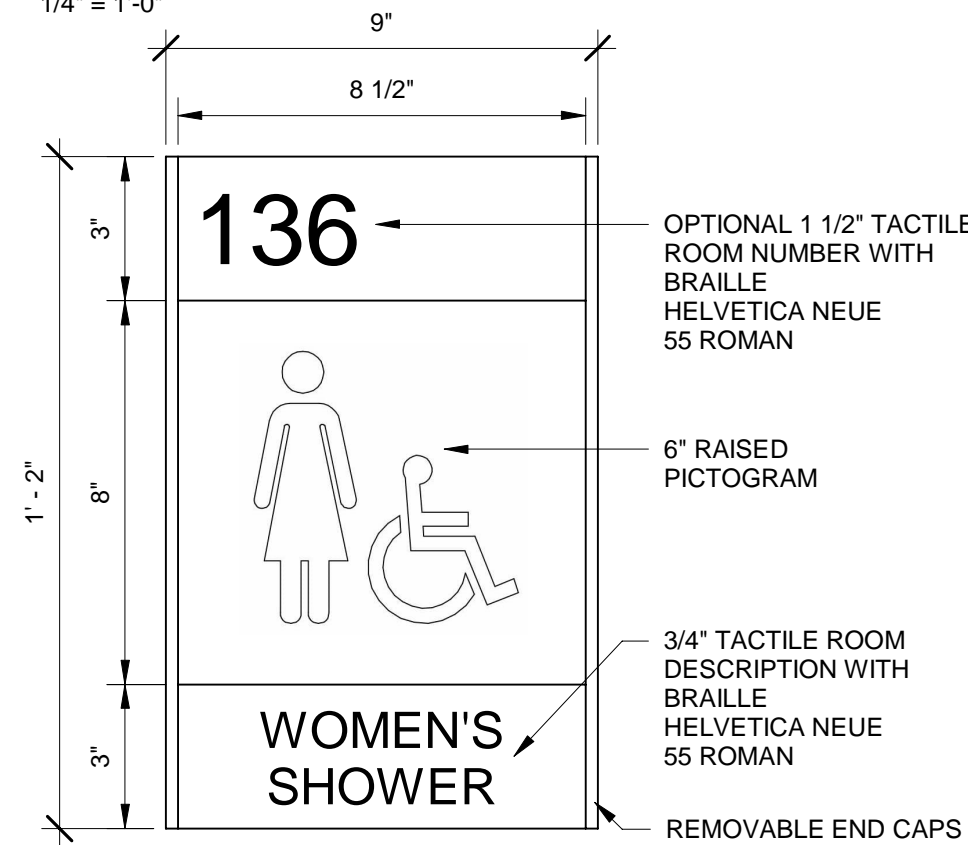
$$1/4'' = 1'-0''$$


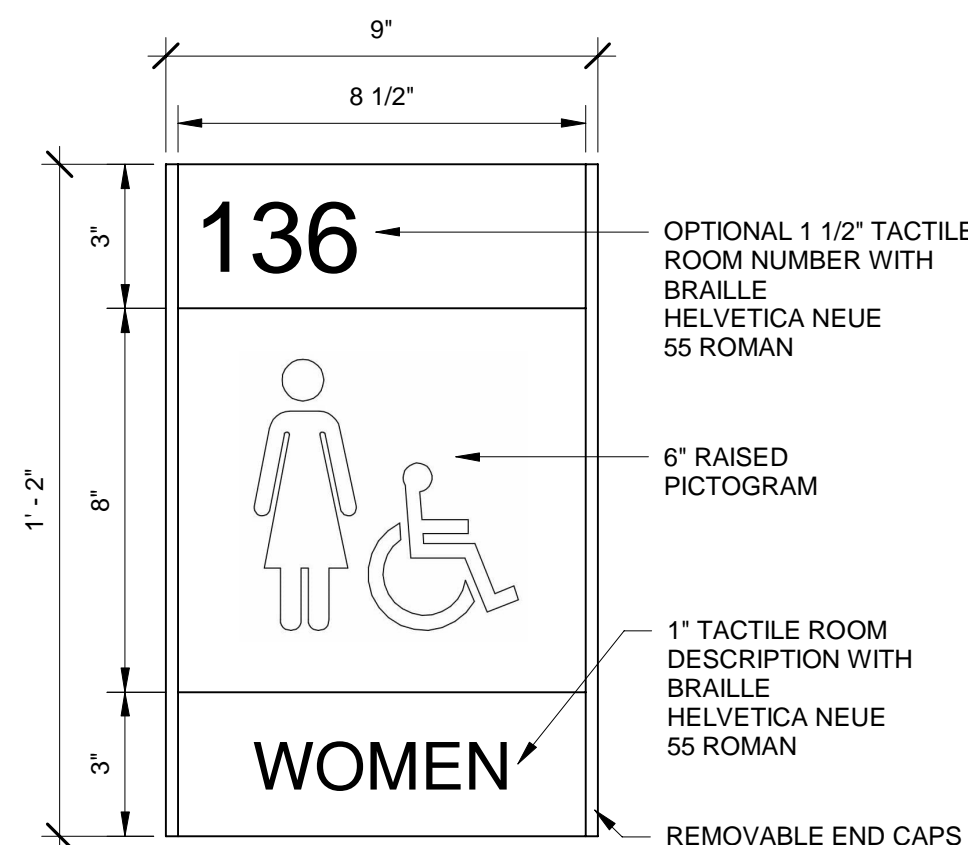
ST-10

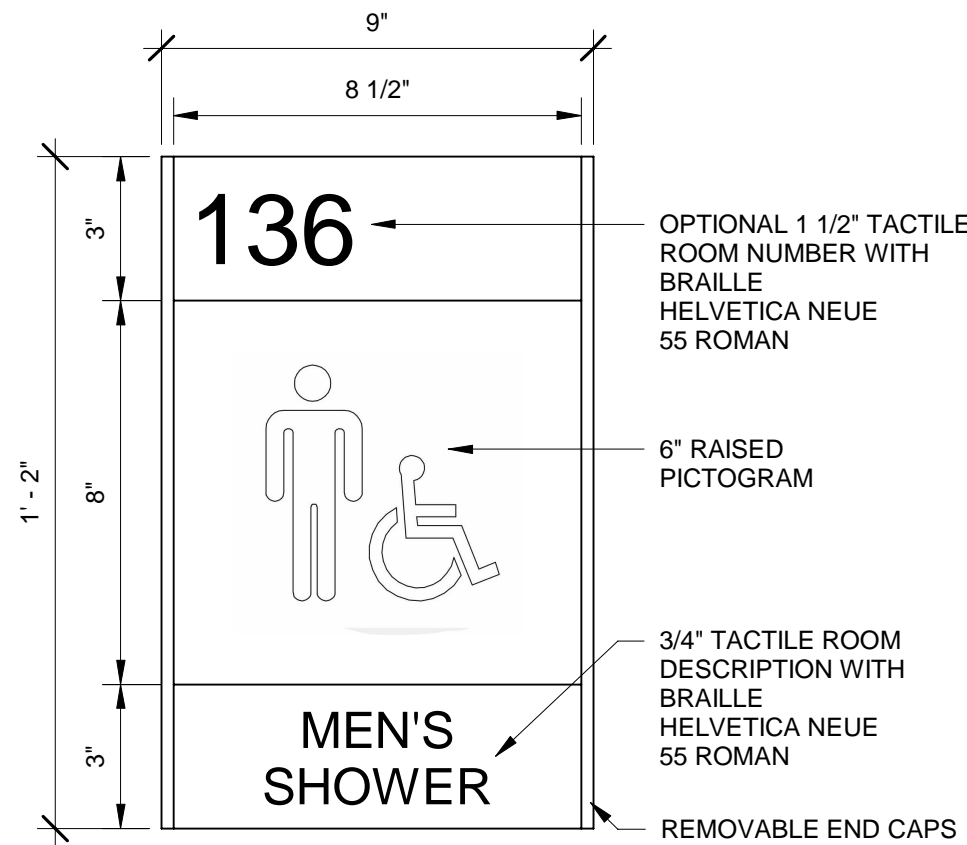


ST-9

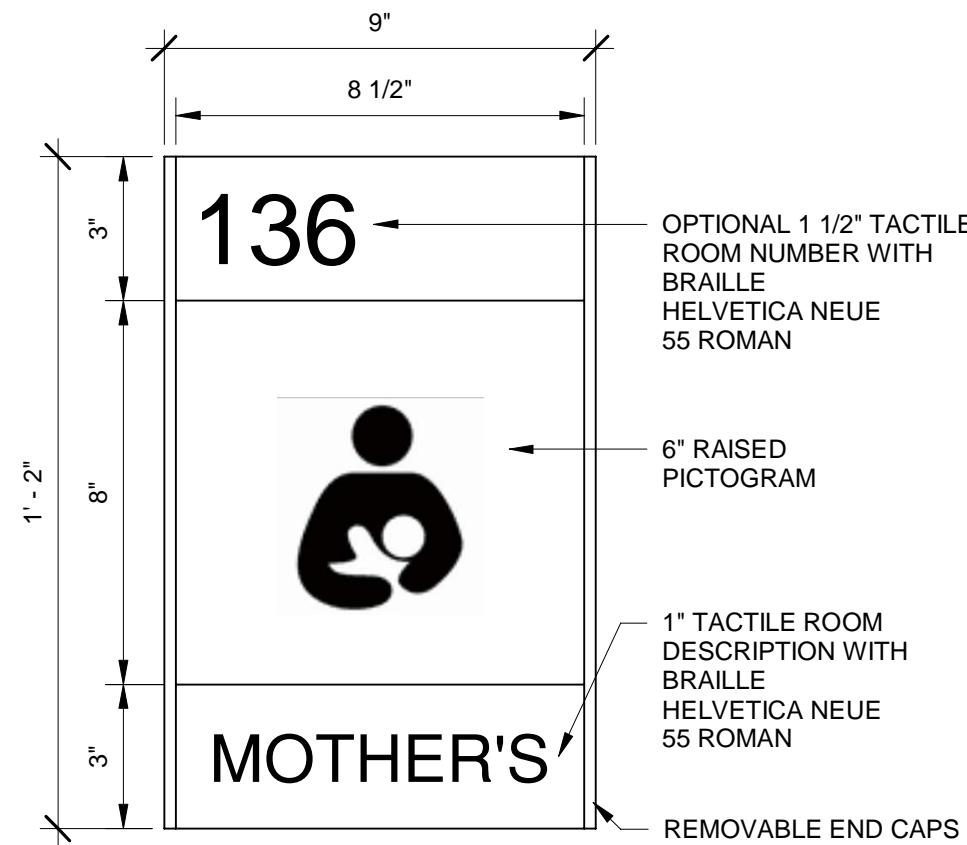


ST-8




ST-7

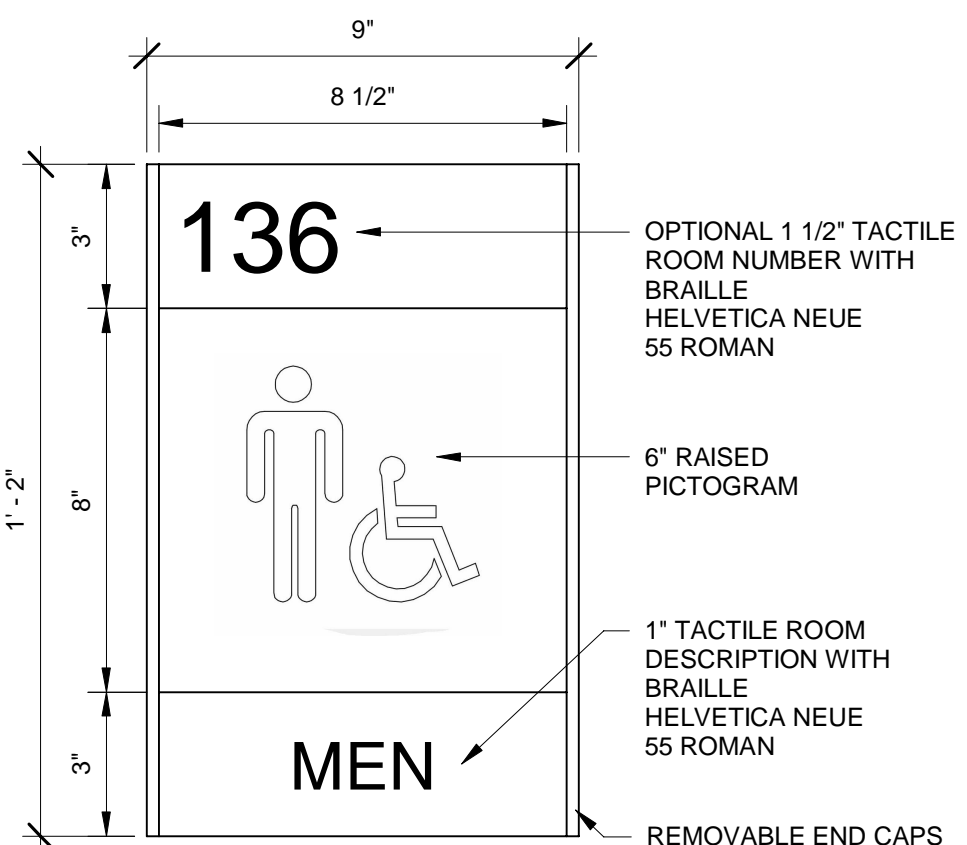


ST-6

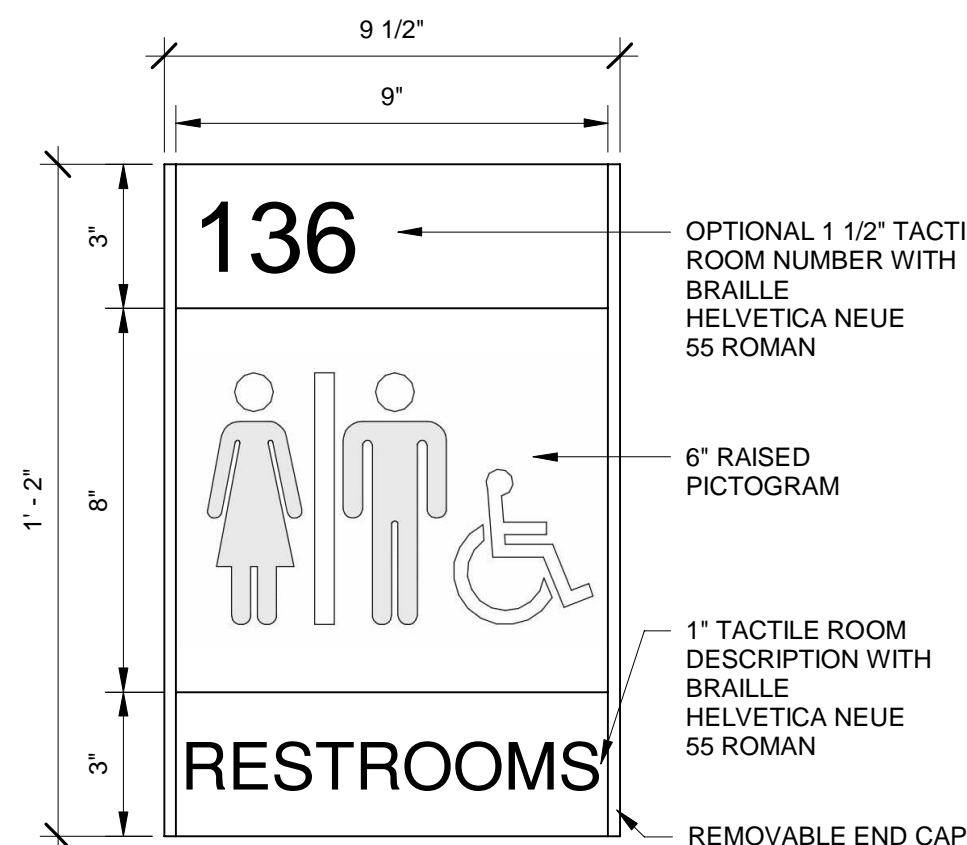


ST-5

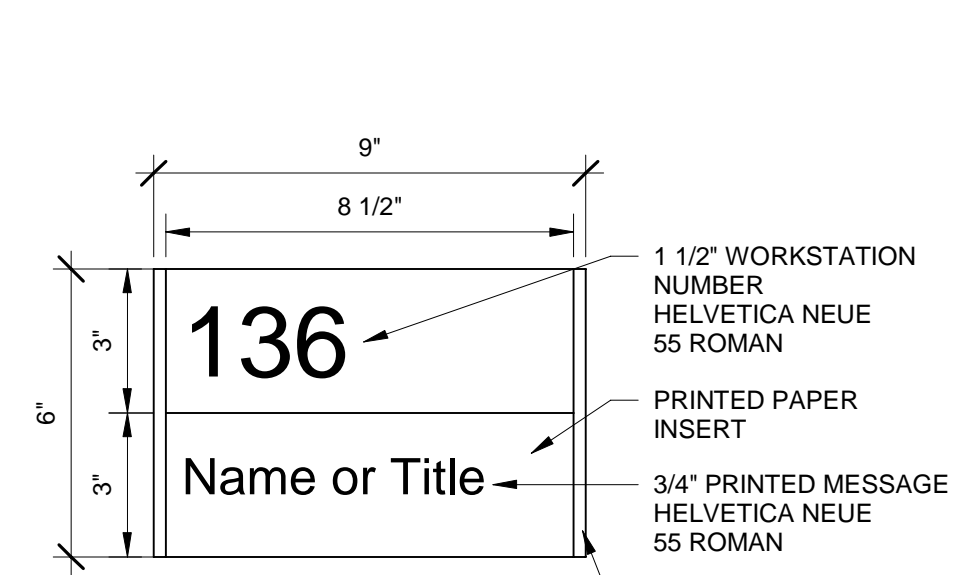

ST-3

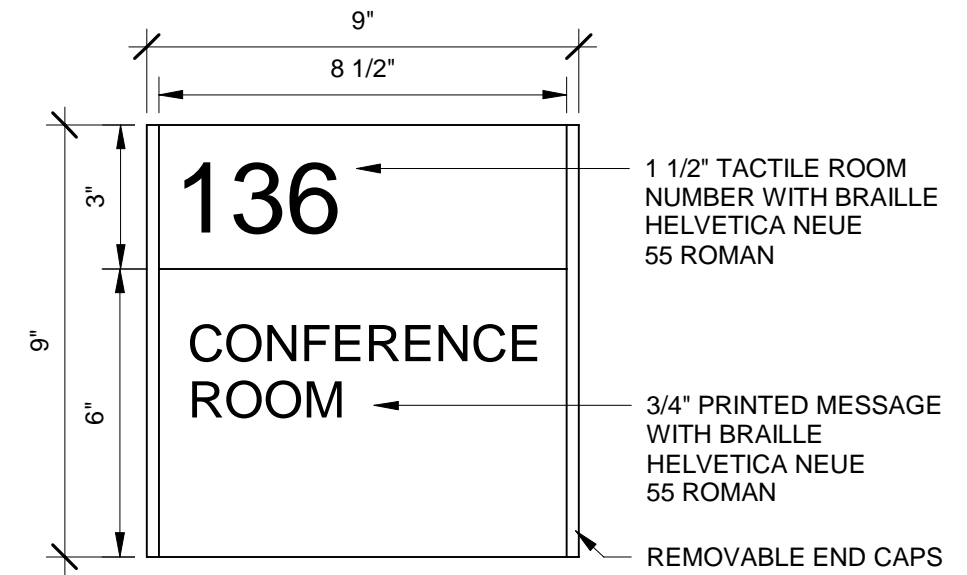

ST-2

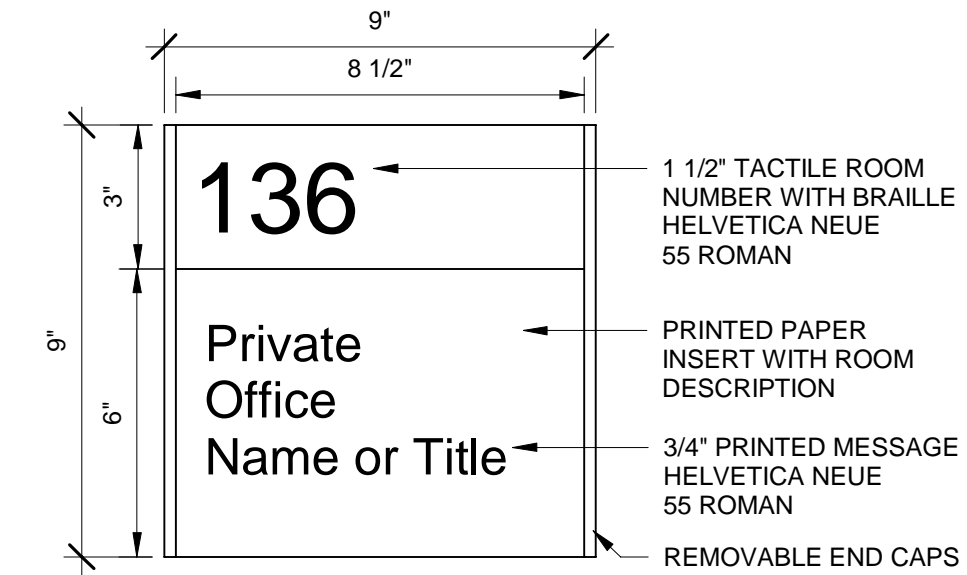


ST-1

SIGNAGE DETAILS

$$3'' = 1' - 0''$$

GENERAL SHEET NOTES

1. MOUNT SIGNAGE ON NEAREST ADJACENT WALL PER ADA WHEN WALL SPACE ON SIDE OF DOOR IS NOT AVAILABLE.
2. ALL EXACT SIGN LOCATIONS ARE SUBJECT TO APPROVAL AT PRE-INSTALLATION WALK-THOUGH PRIOR TO MOUNTING OF SIGNS.
3. LEED SIGNAGE TO BE MOUNTED AS INDICATED ON SIGNAGE DRAWINGS.
4. REFER TO SHEETS I-107 AND I-108 FOR SIGNAGE LOCATIONS.
5. LEED SIGNAGE TEXT TO BE CONFIRMED DURING CONSTRUCTION AFTER LEED CREDITS HAVE BEEN FINALIZED.
6. MOUNT SIGNS AS INDICATED ON F1/I-501 SIGNAGE MOUNTING DETAILS.
7. SIGNAGE SHOWING ON PLANS THAT ARE NOT LISTED IN SIGNAGE SCHEDULE ARE REQUIRED AS SHOWN ON THE PLANS.



**S Army Corps
f Engineers ®**

[illegible]

LEED SIGNAGE SCHEDULE

| ROOM NUMBER | ROOM NAME | SIGN TYPE |
|-------------|----------------------------|-----------|
| 107 | CUSTOMER SERVICE / WAITING | LST-1 |
| 107 | CUSTOMER SERVICE / WAITING | LST-3 |
| 107 | CUSTOMER SERVICE / WAITING | LST-2 |
| 107 | CUSTOMER SERVICE / WAITING | LST-4 |
| 107 | CUSTOMER SERVICE / WAITING | LST-5 |
| 107 | CUSTOMER SERVICE / WAITING | LST-6 |
| 112 | COPY | LST-8 |
| 116 | CORR | LST-8 |
| 118 | BREAK ROOM | LST-7 |
| 119 | MOTHERS | LST-7 |
| 123 | SHOWER | LST-7 |
| 124 | WOMEN'S | LST-7 |
| 125 | MEN'S | LST-7 |
| 126 | SHOWER | LST-7 |
| 129 | WAREHOUSE | LST-8 |
| 129 | WAREHOUSE | LST-8 |
| 134 | GIP WAREHOUSE | LST-8 |
| 134 | GIP WAREHOUSE | LST-8 |
| 136 | RESTROOM | LST-7 |
| 137 | CLS OFFICE | LST-7 |

| | |
|--------------------|------------------------------------|
| CAS | SEPT 2022 |
| DRAWN BY: CAS | SOLICITATION NO.: W912PM22R0015 |
| CHECKED BY: CAS | CONTRACT NO.: W912PM-19-D-0004 |
| SUBMITTED BY: | FIRST TITLE |
| SECOND TITLE | |
| SIZE: ANSI D | |

WILMINGTON DISTRICT
69 DARLINGTON AVENUE
WILMINGTON, NORTH CAROLINA 28403-1343

WHITMAN, REQUARDT & ASSOCIATES, LLP
801 SOUTH CAROLINE STREET
BALTIMORE, MARYLAND 21231









PROJECT 87447

LEED SIGNAGE DETAILS

GRAPHIC SCALE



READY TO ADVERTISE

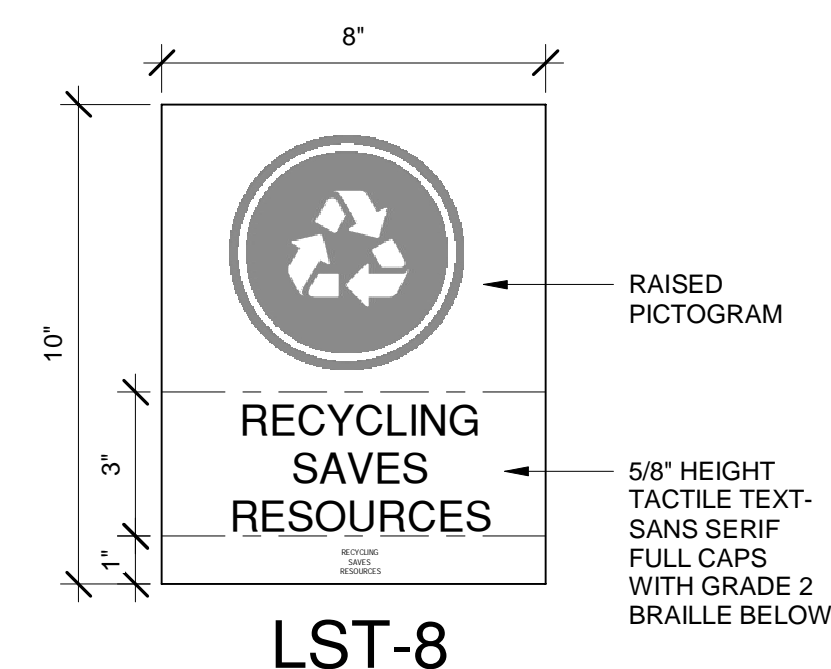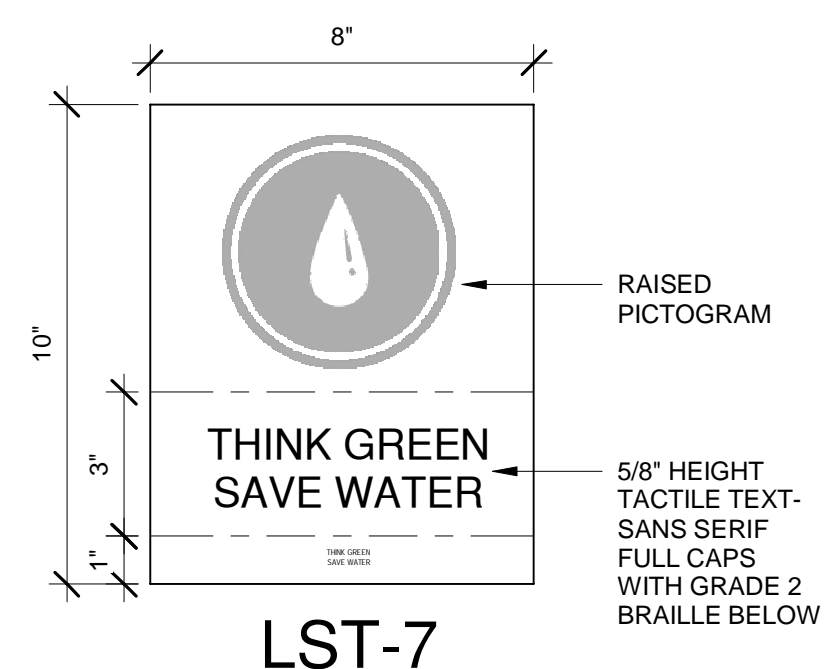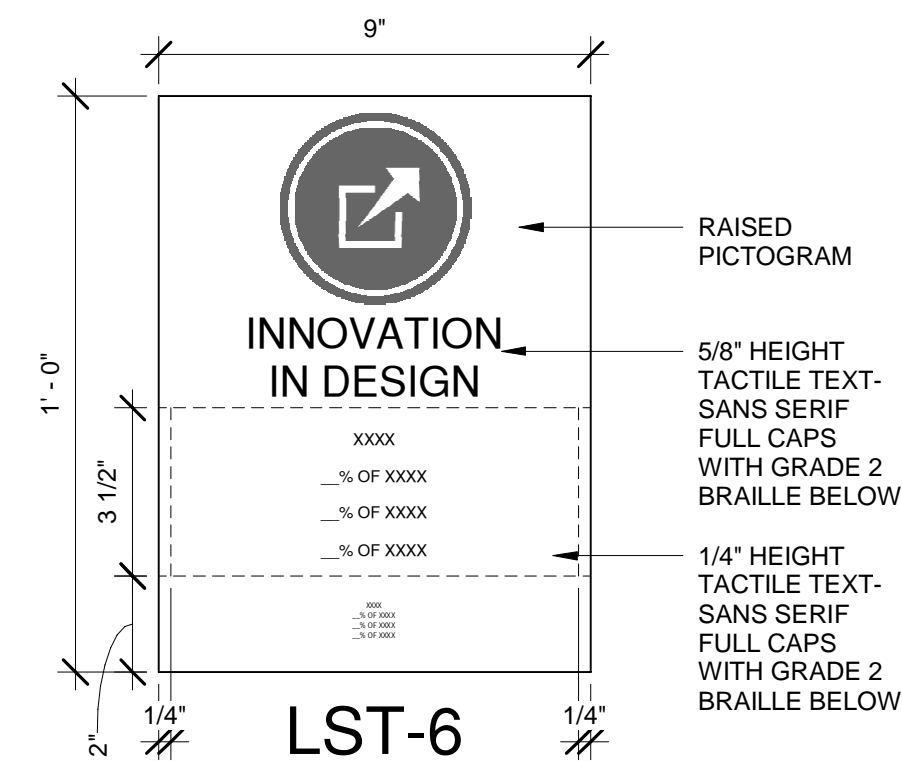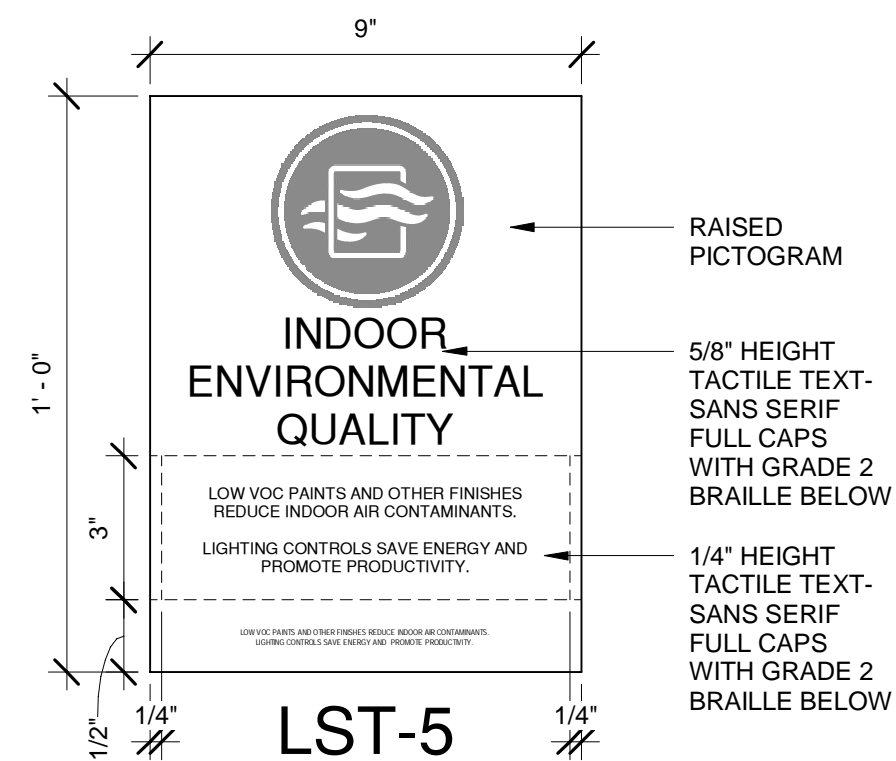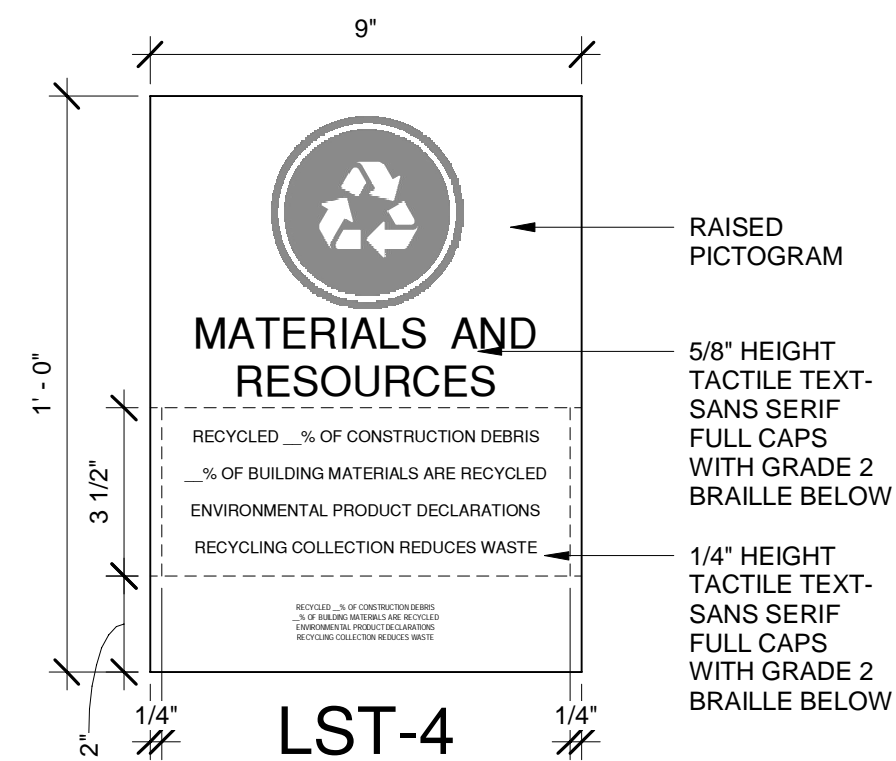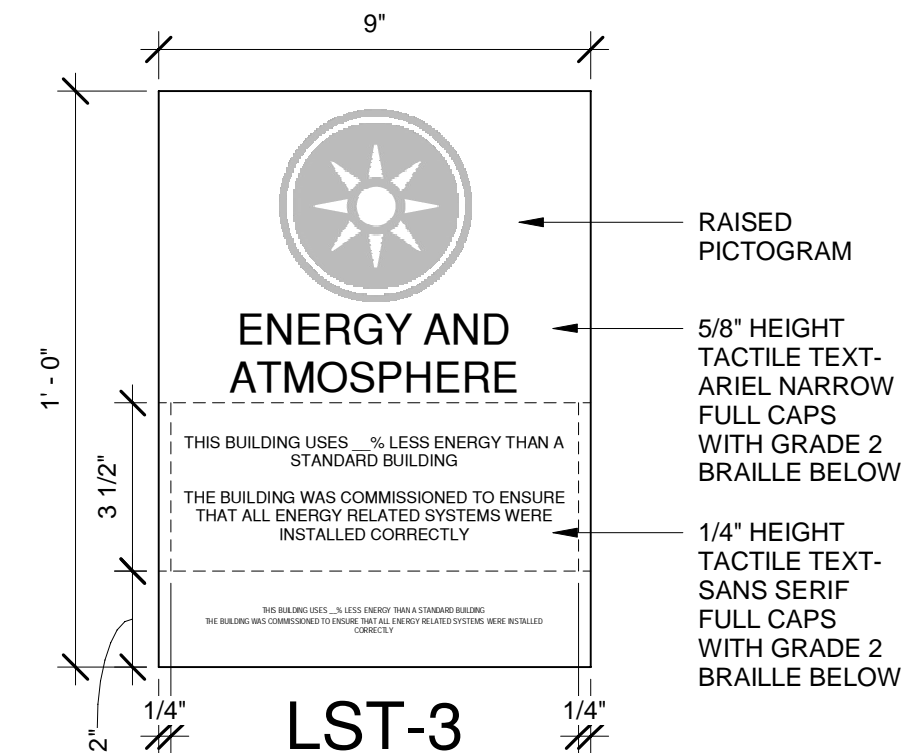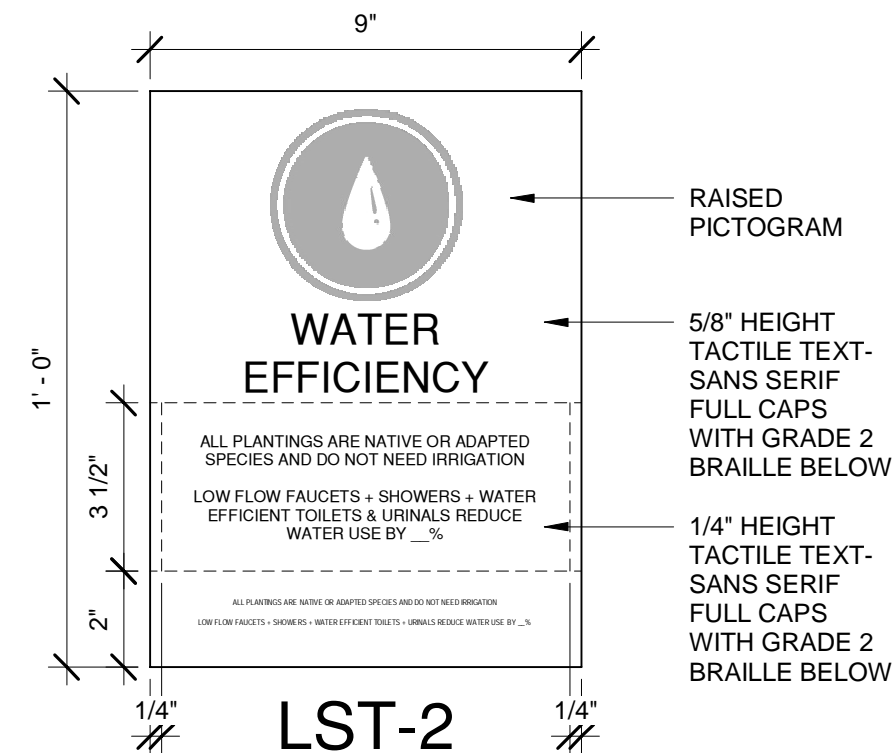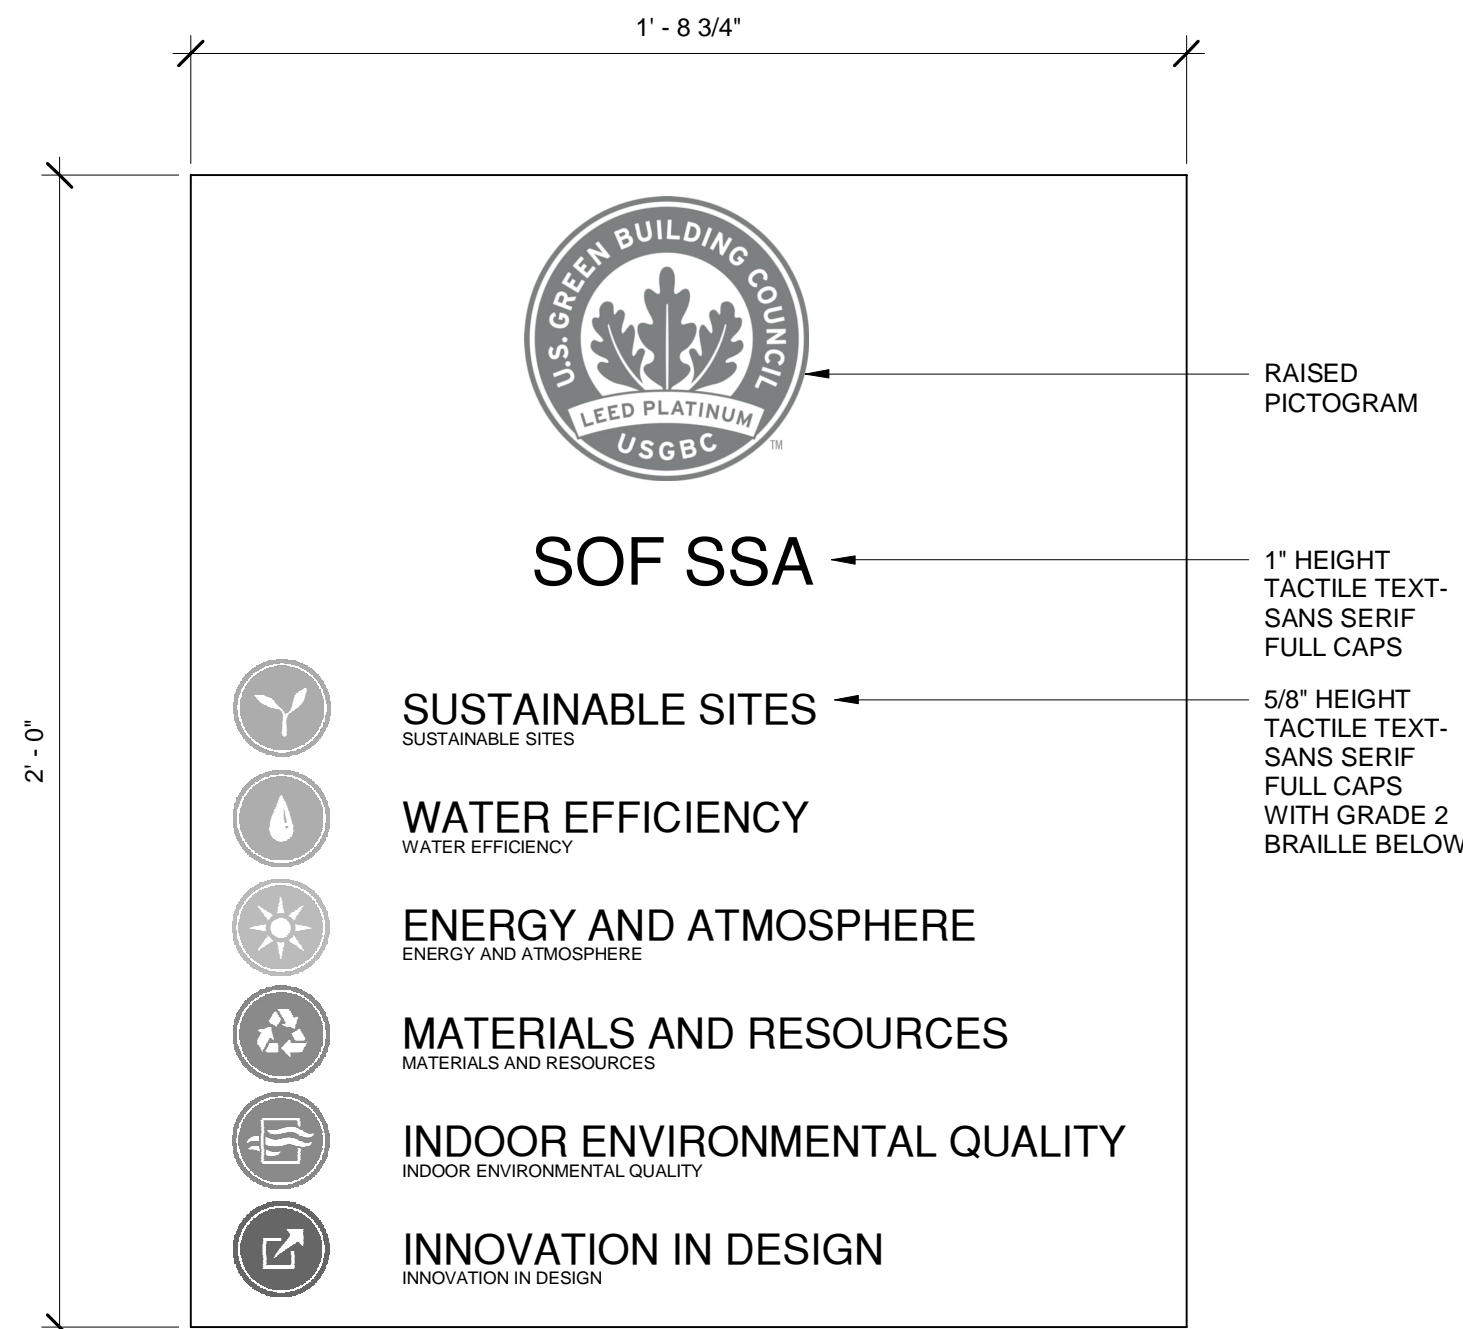

A2

INTERIOR PANEL SIGNAGE - LEED

3" = 1'-0"

READY TO ADVERTISE (RTA) – SID (Structural Interior Design)

USASOC SOF Supply Support Activity (PN 87447)



Fort Bragg, NC

21 September 2022

Contract No. W912PM-19-D-0004

Delivery Order W912PM-20-F-0017



Controlled by: USACE SAW
CUI Category: CONTRACT
Distribution Statement D:
Distribution authorized to Department of Defense and U.S DoD contractors only. Other requests for this document shall be referred to the POC.
POC: USACE KO (Michael Mullen, 910-251-4710)

THIS PAGE INTENTIONALLY LEFT BLANK

TABLE OF CONTENTS

Section 1: Design Analysis

Section 2: UFGS 09 06 00 Schedules for Finishes

Section 3: Interior Finish Plans & Finish Schedule

Section 4: Finish Color Boards

Section 1: Design Analysis



DESIGN ANALYSIS

Structural interior finishes provided for USASOC SOF SSA will support the renovation's administrative spaces, contractor logistics support area, a multipurpose conference room, and restrooms. The facility includes areas for storage, loading dock, shipping and receiving, administration, and a group issue point (GIP). The areas of work include an administrative area and a contractor logistics support area approximately totaling 23,840 sf.

Direction for this project is to follow the USASOC finish standards that are implemented in the majority of USASOC-occupied space on the Army yard. The Fort Bragg Installation Design Guide was referenced during the design to ensure compliance with current finish standards. All finishes listed have been vetted by USASOC, replaced as needed if discontinued, and verified for availability at the time construction documents were issued. The 'Neutral Almond Colorway' was selected, and it coordinates with the exterior finishes selected for the building.

In both secure portions of the building the conference rooms, open office, private offices and corridors will be finished with USASOC's standard luxury vinyl tile. The vestibules and waiting areas in both the admin and warehouse portions of the building are finished with a walk-off carpet tile, and loose laid vinyl-edged mats are located at all entry/exit doors from the warehouse to the admin side of the building. All walls in both secure spaces are finished with an off-white paint and full height corner guards at all drywall outside corners.

The SIPR, COMMS/EF, and telecom closets will have a static dissipative floor finish, and off-white walls. The warehouse will receive a durable resinous floor coating.

The restrooms are finished with a 12" x 12" warm grey porcelain floor tile, a 4" x 16" off-white ceramic wall tile. The showers are finished with a 2" x 2" white mosaic tile flooring and 3" x 6" white ceramic wall tile.

The break rooms are finished with luxury vinyl tile flooring, off-white walls, and both break rooms in the project will have plastic laminate cabinets with solid surface counters. White acoustical ceiling tiles will run through both spaces with white gypsum board bulkheads where indicated.

In the wet areas (restrooms, showers, mother's room) ceiling tiles and grids have been specified to withstand the humid environment as needed. Shower room ceiling tiles have a factory-applied plastic paint finish and are humidity/sag resistant. Ceiling tiles in the restrooms and mother's room will be perforated with a vinyl-faced membrane finish, with standard moisture-, mold/mildew- and bacteria-resistant properties. Ceiling grids for all wet areas are specified to be a heavy-duty aluminum grid with corrosion resistant properties.



Section 2: UFGS 09 06 00 Schedules for Finishes

SECTION 09 06 00

SCHEDULES FOR FINISHES

PART 1 GENERAL

1.1 SUMMARY

This section covers only the color of exterior and interior materials and products that are exposed to view in the finished construction. The word "color", as used herein, includes surface color and pattern. Requirements for quality, product specifications, and method of installation are covered in other appropriate sections of the specifications. Specific locations where the various materials are required are shown on the drawings if not identified in this specification. Items not designated for color in this section may be specified in other sections. When color is not designated for items, propose a color for approval.

PART 2 PRODUCTS

2.1 COLOR SCHEDULE

The color schedule information provided in the following paragraphs lists the colors, patterns and textures required for exterior and interior finishes, including both factory applied and field applied colors. Where color is shown as being specific to one manufacturer, an equivalent color by another manufacturer may be submitted for approval. Manufacturers and materials specified are not intended to limit the selection of equal colors from other manufacturers. In the case of difference between the drawings and specifications, colors identified in this specification govern.

2.2 EXTERIOR FINISHES

Reference drawings for manufacturer and color information.

2.2.1 Exterior Walls

Exterior wall colors apply to exterior wall surfaces including recesses at entrances and projecting vestibules. When applicable, paint conduit to closely match the adjacent surface color. Provide wall colors to match the colors listed below.

2.2.1.1 Brick

Palmetto 1.25 Greystone

2.2.1.2 Mortar

Light Buff

2.2.1.3 Concrete Masonry Units (Rock/Split-Faced), Smooth-Faced

Adams 4310 (Warm Grey)

2.2.1.4 Metal Wall Panels, Hardware, and Associated Trim
Paint FS-23617 (Beige)

2.2.1.5 Precast Stone
Limestone

2.2.1.6 Glass and Glazing
Solar Gray-Medium Tint

2.2.2 Exterior Trim

Provide exterior trim to match the colors listed below.

2.2.2.1 Steel Doors and Door Frames
Paint FS-24084 (Dark Bronze)

2.2.2.2 Steel Windows (mullion, muntin, sash, trim, and sill)
Paint FS-24084 (Dark Bronze)

2.2.2.3 Fascia
Paint FS-24084 (Dark Bronze)

2.2.2.4 Soffits and Ceilings
Soffits: Gypsum Exposed Structure: Artillery

2.2.2.5 Overhangs
Paint FS-24084 (Dark Bronze)

2.2.2.6 Downspouts and Gutters
Paint FS-24084 (Dark Bronze)

2.2.2.7 Louvers
Match adjacent material in color.

2.2.2.8 Flashings
Paint FS-24084 (Dark Bronze)

2.2.2.9 Coping
PAINT FS - 24084 (Dark Bronze)

2.2.2.10 Handrails
Handrails, Freestanding: FS-20059 (Mission Brown), Handrails,
Attached to Buildings: FS-24084 (Dark Bronze)

2.2.2.11 Guardrails

Paint FS-24084 (Dark Bronze)

2.2.2.12 Caulking and Sealants

Match adjacent material in color.

2.2.2.13 Bollards

Bollards Adjacent to Buildings: FS-24084 (Dark Bronze)
Bollards at site perimeter fencing and dumpster enclosure:
FS-20059 with FS-23655 (Safety Yellow) stripe

2.2.2.14 Signage

Traffic Signs and Street Signposts and Backs: FS-20059 (Mission Brown)
Street Address Signs on Buildings: FS-27886 (White) with FS-20059 (Mission Brown) Reflective Copy
Building Number Sign: FS-20059 (Mission Brown) with FS-27886 (White) Copy
Organization Sign Backs and Posts FS-20059 (Mission Brown).

2.2.2.15 Control Joints

Match adjacent material in color.

2.2.2.16 Expansion Joint and/or Covers

Match adjacent material in color.

2.2.3 Exterior Roof

Apply roof color to exterior roof surfaces including sheet metal flashings and copings, snow guards, mechanical units, mechanical penthouses, roof trim, pipes, conduits, electrical appurtenances, and similar items.
Provide roof color to match the colors listed below.

2.2.3.1 Metal

FS-24201 (Medium Bronze)

2.2.3.2 TPO

White

2.2.3.3 Penetrations

Match roof in color.

2.3 INTERIOR FINISHES

2.3.1 Interior Floor Finishes

Provide flooring materials to match the colors listed below.

- 2.3.1.1 Luxury Vinyl Tile
 - Travertine ETR toscano 7212
- 2.3.1.2 Static-Control Resilient Flooring (Static-Dissipative Vinyl Tile)
 - Flannel Blanket
- 2.3.1.3 Porcelain Tile
 - Reverb Ash
- 2.3.1.4 Transition
 - Cement
- 2.3.1.5 Entrance Mat
 - Black Grey
- 2.3.1.6 Plastic Laminate
 - Cream Softwood, Natural Grain
- 2.3.1.7 Industrial Floor Coating
 - Mushroom
- 2.3.2 Interior Base Finishes
 - Provide base materials to match the colors listed below.
- 2.3.2.1 Resilient Base and Moldings
 - Cement
- 2.3.2.2 Porcelain Tile
 - Reverb Ash
- 2.3.3 Interior Wall Finishes
 - Apply interior wall color to the entire wall surface, including reveals, vertical furred spaces and columns, grilles, diffusers, electrical and access panels, and piping and conduit adjacent to wall surfaces unless otherwise specified. Paint items not specified in other paragraphs to match adjacent wall surface. Provide wall materials to match the colors listed below.
- 2.3.3.1 Paint
 - Toasted Almond FS-27886
 - Almond FS-164000
- 2.3.3.2 Ceramic Tile
 - Biscuit 00101
 - Arctic White 0790

2.3.3.3 Exposed Structural Columns

Toasted Almond FS-27886

2.3.4 Interior Ceiling Finishes

Apply ceiling colors to ceiling surfaces including soffits, furred down areas, grilles, diffusers, registers, and access panels. In addition, apply ceiling color to joists, underside of roof deck, and conduit and piping where joists and deck are exposed and required to be painted. Provide ceiling materials to match the colors listed below.

2.3.4.1 Acoustical Tile and Grid

Manufacturers Standard White

2.3.4.2 Paint (Ceilings)

Ceiling white FS-37886

2.3.4.3 Paint (Soffits)

Ceiling white FS-37886

2.3.4.4 Metal Deck

FS-36307

2.3.4.5 Structural Framing

FS-36307

2.3.5 Interior Trim

Provide interior trim to match the colors listed below.

2.3.5.1 Steel Doors

Almond FS-16400

2.3.5.2 Steel Door Frames

Almond FS-16400

2.3.5.3 Steel Windows (mullion, muntin, sash, trim, and stool)

Almond FS-16400

2.3.5.4 Wood Doors

Rift cut red oak

2.3.5.5 Wood Stain

Clear

2.3.6 Interior Window Treatment

Provide window treatments to match the colors listed below.

2.3.6.1 Horizontal Blinds

974 Pearl

2.3.7 Interior Miscellaneous

Provide miscellaneous items to match the colors listed below.

2.3.7.1 Toilet Partitions and Urinal Screens

HDPE; Coordinate with tile color

2.3.7.2 Casework

Match wood door species

2.3.7.3 Plastic Laminate

Match wood door species

2.3.7.4 Solid Surfacing Material

White Jasmine

2.3.7.5 Corner Guards

Match wall color

2.3.7.6 Protective Wall Covering/Panel

Match wall color

2.3.7.7 Signage Message Color

Match contrasting accent for the colorway

2.3.7.8 Signage Background Color

Match contrasting accent for the colorway

2.3.7.9 Bulletin Board

Tacwall, Earthen with aluminum trim.

2.3.7.10 Wall Switch Handles and Standard Receptacle Bodies

Match substrate color

2.3.7.11 Electrical Device Cover Plates

Stainless steel No. 4 satin finish

2.3.7.12 Electrical Panels

Match substrate color

2.3.7.13 Shower Wall Kits, Trim and Shower Pan

Bone or equal

PART 3 EXECUTION


Not Used

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK


Section 3: Interior Finish Plans & Finish Schedule

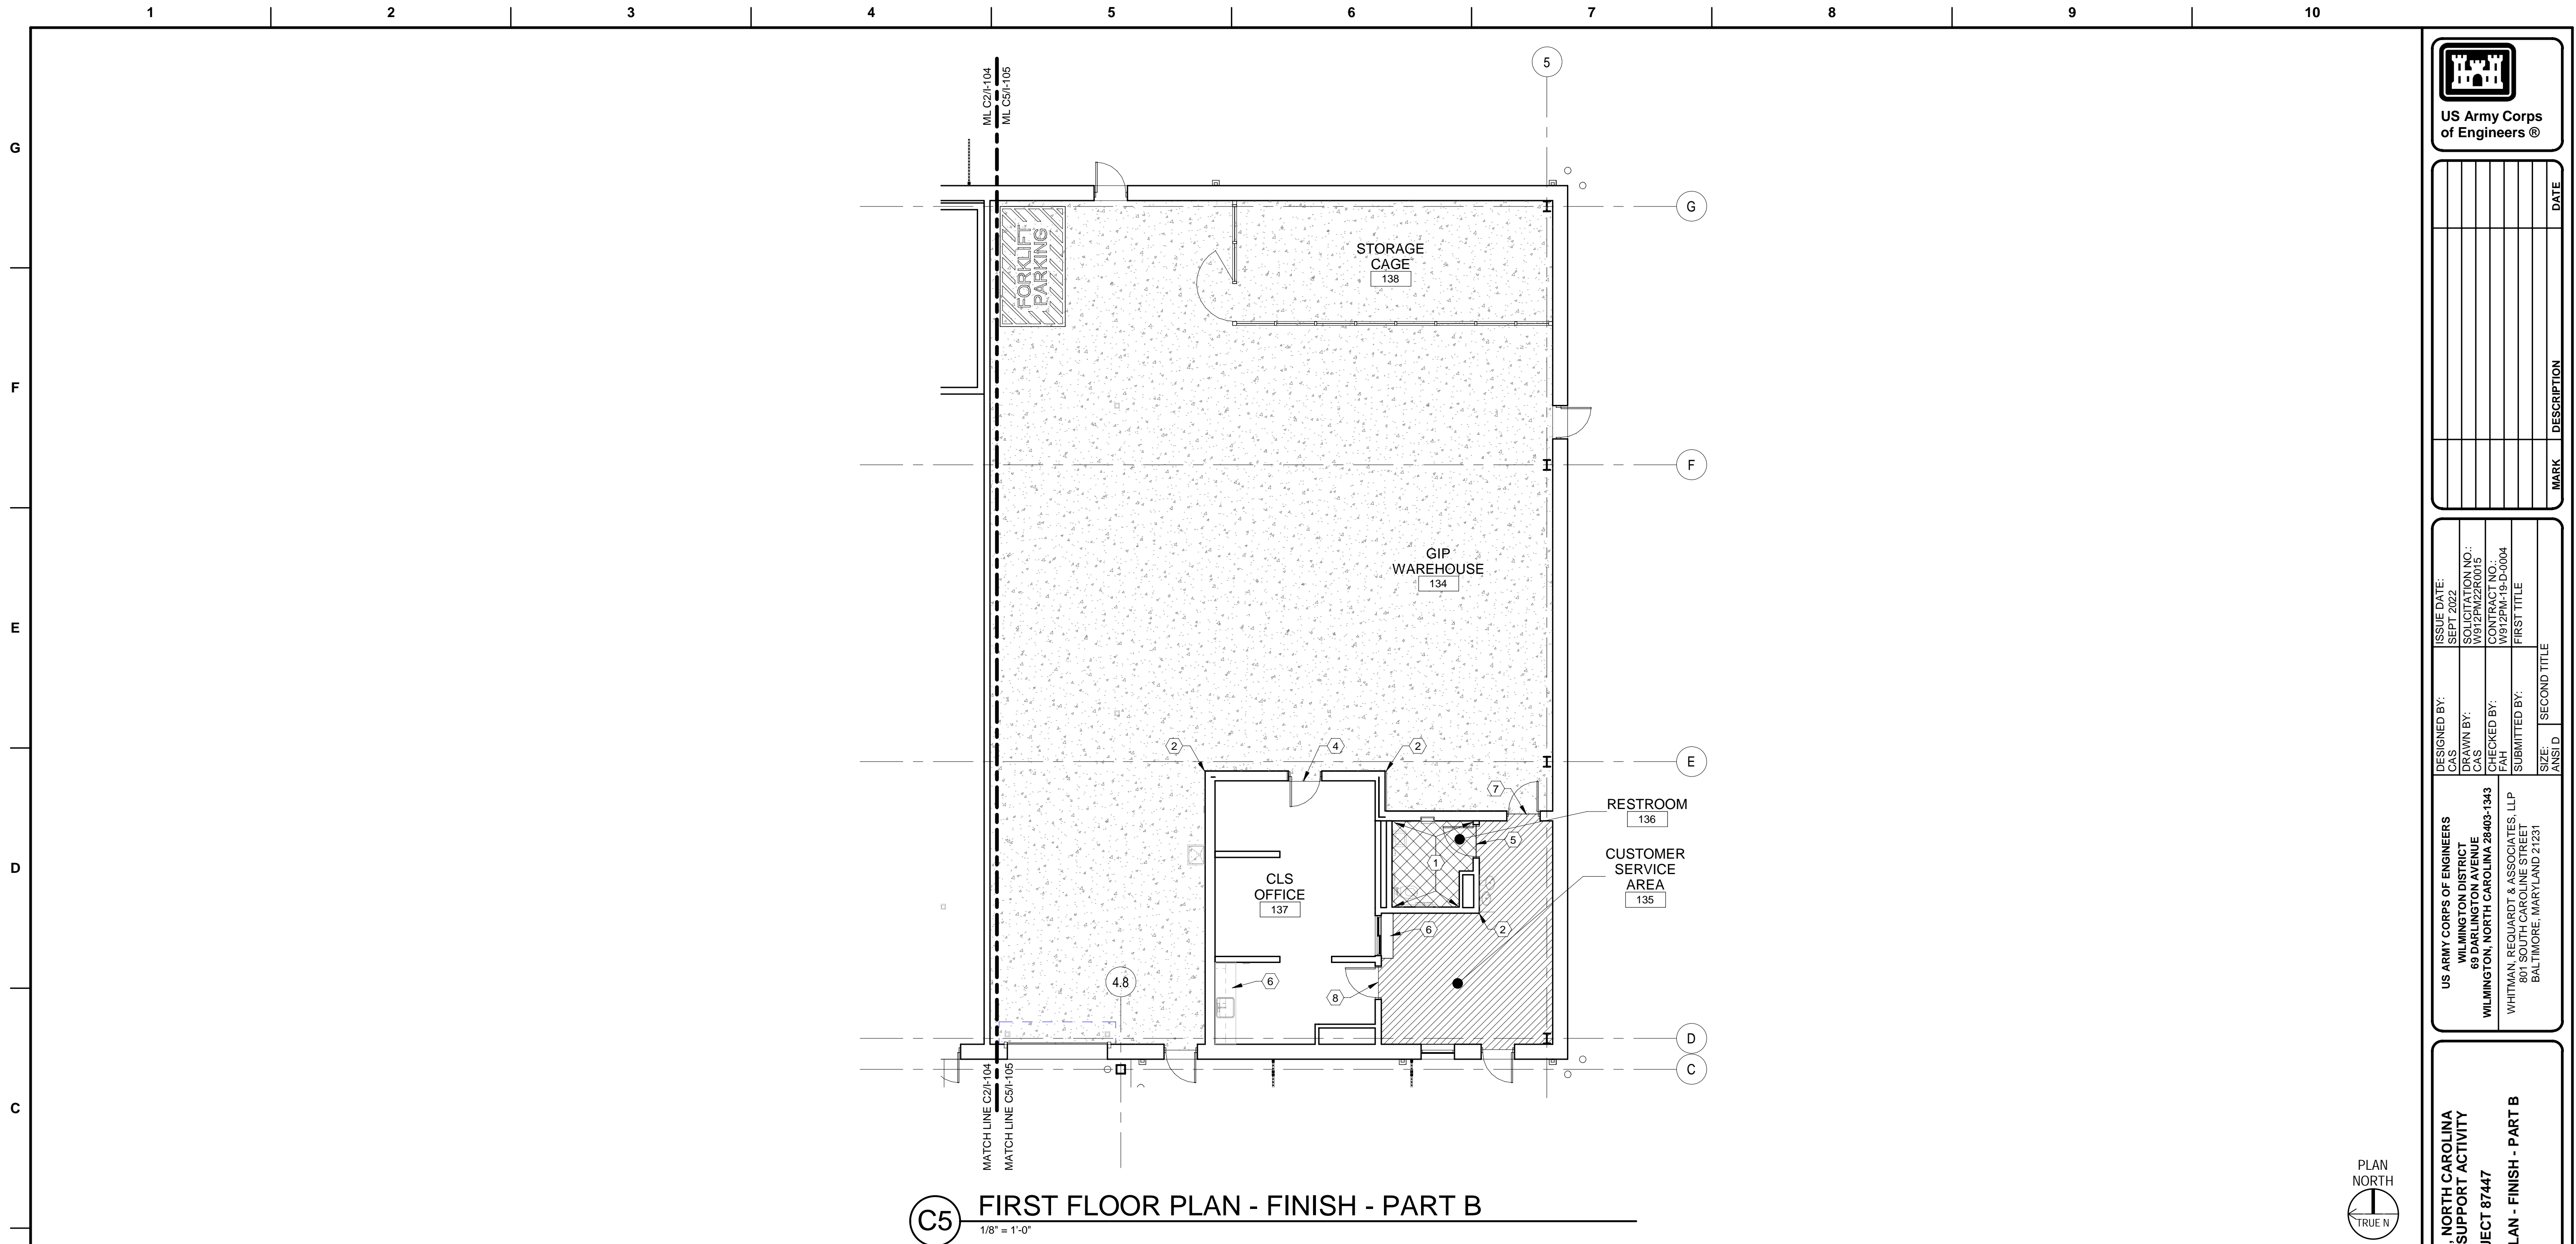


[illegible]

G


| INTERIOR FINISH LIST | | | |
|----------------------|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------|
| DESIGNATION | MANUFACTURER | DESCRIPTION | COMMENTS |
| FLOOR | | | |
| LVT-1 | TARKETT | LUXURY VINYL TILE; STYLE: EVENT, COLOR: TRAVERTINE ETR TOSCANO 7212 QU, SIZE: 12" X 36" X .120" THICK, INSTALLATION: GLUE DOWN | |
| PFT-1 | DALTILE | PORCELAIN FLOOR TILE; COLLECTION: VOLUME 1.0, COLOR: REVERB ASH VL74, SIZE: 12" X 24" X 5/16" THICK, FINISH: MATTE, DCOF WET: ≥ 0.42 | |
| PFT-2 | DALTILE | PORCELAIN FLOOR TILE; COLLECTION: COLOR WHEEL MOSAIC, STYLE: 2" X 2" MOSAIC DOT MOUNTED, SHAPE: STRAIGHT JOINT, COLOR: MATTE ARCTIC WHITE 0790, THICKNESS: 1/4", FINISH: MATTE, DCOF WET: ≥ 0.42 | |
| SC | STONHARD | RESINOUS FLOORING; STYLE: STONCLAD GS, COLOR: MUSHROOM | |
| SDT-1 | TARKETT | STATIC DISSIPATIVE TILE; STYLE: IQ GRANIT SD, COLOR: FLANNEL BLANKET 0722, SIZE: 24" X 24", THICKNESS: 2mm | |
| WO-1 | TARKETT | WALK-OFF CARPET; STYLE: ABRASIVE ACTION II 02578, COLOR: WINTER GRAY 1910, SIZE: 24" X 24" X 0.115" THICK, GAUGE: 1/12" | VESTIBULE |
| WO-2 | MATS INC | WALK-OFF MAT; STYLE: 3M NOMAD CARPET MATTING 5000, COLOR: BLACK-GREY, SIZE: 48" X 72" | LOOSE-LAID MAT WITH BLACK VINYL TRIM |
| BASE | | | |
| PFT-3 | DALTILE | PORCELAIN WALL BASE; COLLECTION: VOLUME 1.0, STYLE: COVE BASE P-36C9TB, COLOR: REVERBN ASH VL74, SIZE: 6" X 12", FINISH: MATTE | |
| RB-1 | TARKETT | RUBBER WALL BASE; STYLE: 4" COVE BASE, COLOR: 121 CEMENT; PROFILE: STRAIGHT @ CARPET, COVE @ RESILIENT | |
| WALL | | | |
| CG-1 | CONSTRUCTION SPECIALTIES | CORNER GUARD; ACROVYN, SSM-20, PEARL #934, THICKNESS: 0.040" | |
| CWT-1 | DALTILE | CERAMIC WALL TILE; STYLE: COLOR WHEEL LINEAR, COLOR: BISCUIT K175, SIZE: 4" X 16", INSTALLATION: RUNNING BOND, SHEEN: SEMI-GLOSS | WET WALLS SHALL HAVE A 4'-0" HIGH CERAMIC TILE WAINGSCOT |
| CWT-2 | DALTILE | CERAMIC WALL TILE; COLLECTION: COLOR WHEEL LINEAR, COLOR: MATTE ARCTIC WHITE 0790, SIZE: 4" X 8", INSTALLATION: RUNNING BOND, SHEEN: SEMI-GLOSS | WET WALLS SHALL HAVE A 4'-0" HIGH CERAMIC TILE WAINGSCOT |
| PT-1 | PPG | GENERAL WALL PAINT; COLOR: COMMERCIAL WHITE PPG1025-1, FS-27886, FINISH: EGGSHELL SHEEN | |
| PT-2 | PPG | ACCENT WALL PAINT; COLOR: STORM'S COMING PPG1008-2, FS-16400, FINISH: EGGSHELL SHEEN | |
| CEILING | | | |
| ACT-1 | ARMSTRONG CEILING | ACOUSTICAL CEILING TILE: ULTIMA LAY-IN AND TEGULAR, SIZE: 24" X 24" X 0.75", COLOR: WHITE; SUSPENSION GRID: 15/16" PRELUDE; COLOR: WHITE | |
| ACT-2 | ARMSTRONG CEILING | ACOUSTICAL CEILING TILE: VL PERFORATED #869; SIZE: 24" X 24" X 5/8"; COLOR: WHITE; SQUARE LAY-IN; SUSPENSION SYSTEM: 15/16" PRELUDE PLUS XL ALUMINUM GRID; COLOR: WHITE | VINYL-FACED MEMBRANE FOR WET AREAS |
| ACT-3 | ARMSTRONG CEILING | ACOUSTICAL CEILING TILE: CERAMAGUARD FINE FISURED PERFORATED, 15/16" SQUARE LAY-IN #607; SIZE: 24" X 24" X 5/8"; COLOR: WHITE; SQUARE LAY-IN; SUSPENSION SYSTEM: 15/16" PRELUDE PLUS XL ALUMINUM GRID; COLOR: WHITE | FACTORY-APPLIED PLASTIC PAINT FINISH, HUMIDITY/SAG RESISTANCE FOR SHOWER ROOMS |
| PT-4 | PPG | GYP CEILING PAINT; COLOR: GYPSUM PPG1006-1, FS-37885, FINISH: FLAT SHEEN | |
| PT-5 | PPG | GYP CEILING PAINT; COLOR: ARTILLERY PPG-1008-6, FS-36250, FINISH: FLAT SHEEN | EXPOSED STRUCTURES |
| MILLWORK | | | |
| PLAM-1 | - | NOT USED | |
| PLAM-2 | FORMICA | PLASTIC LAMINATE; CREAM SOFTWOOD 4923-NG, NATURAL GRAIN | |
| SS-1 | CORIAN | SOLID SURFACE COUNTER; COLOR: WHITE JASMINE, THICKNESS: 1/2" | |
| DOORS AND FRAMES | | | |
| PT-3 | PPG | METAL DOOR AND ALL DOOR FRAMES; COLOR: PAINT DOOR AND FRAME TO MATCH WALL, FINISH: SEM-GLOSS SHEEN | |
| WD-1 | PPG | CUSTOM GRADE RED OAK, RIFT CUT WITH CLEAR FINISH | |
| BLINDS | | | |
| AB-1 | HUNTER DOUGLAS | HORIZONTAL LOUVER BLINDS; STYLE: CL62 1" ALUMINUM HORIZONTAL BLINDS, COLOR: 974 PEARL, SIZE: 1" x 1" x .024" | |

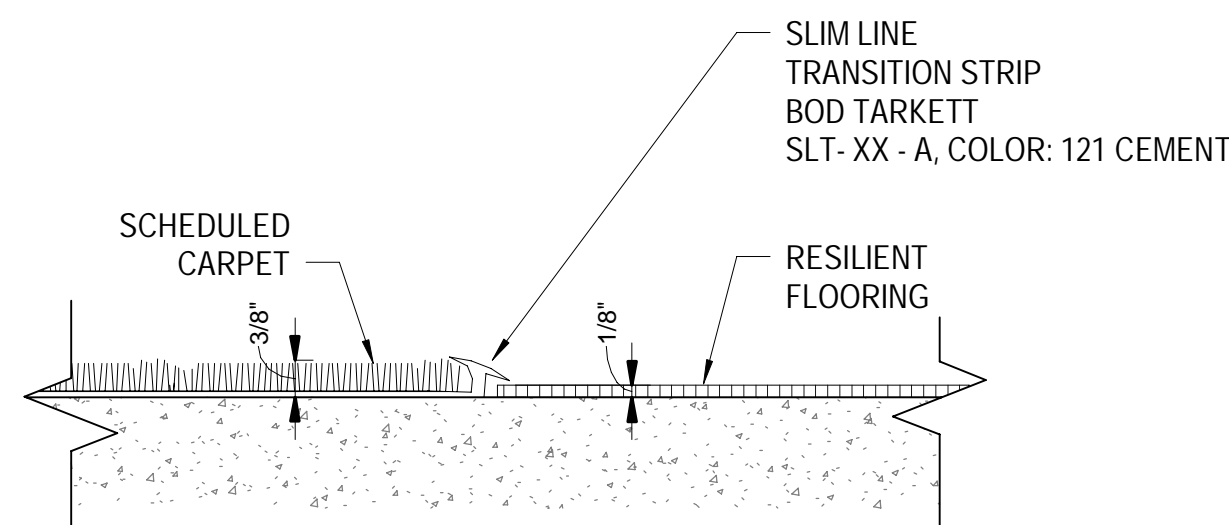F


TS - 1 CARPET TO RESILIENT

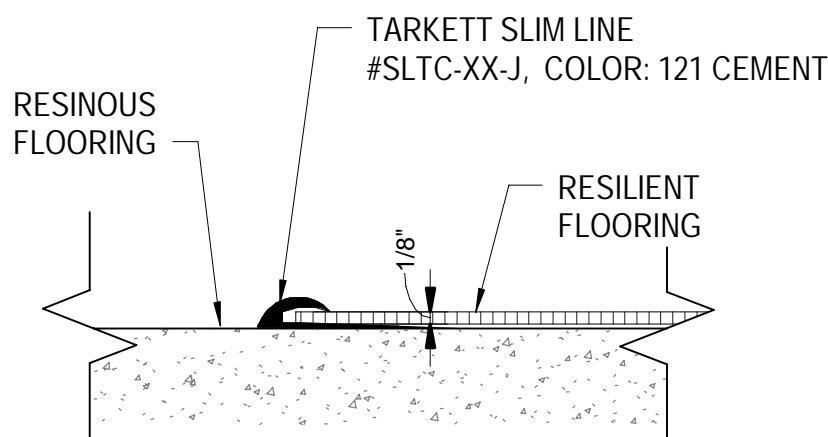


TS - 2 CONCRETE TO RESILIENT

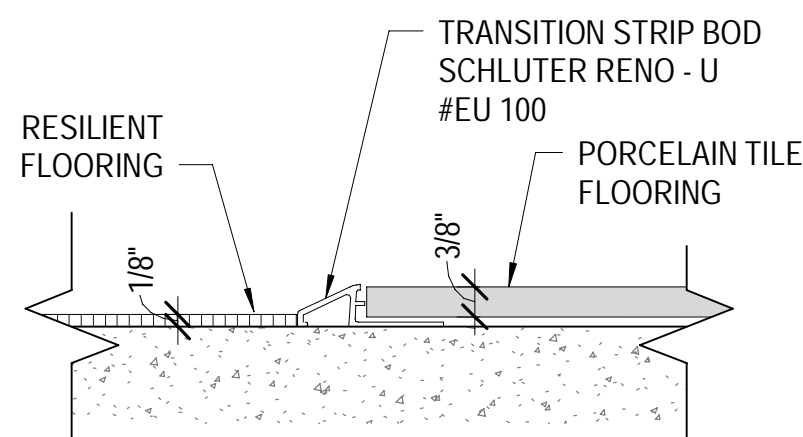

TS - 3 RESILIENT TO PORCELAIN

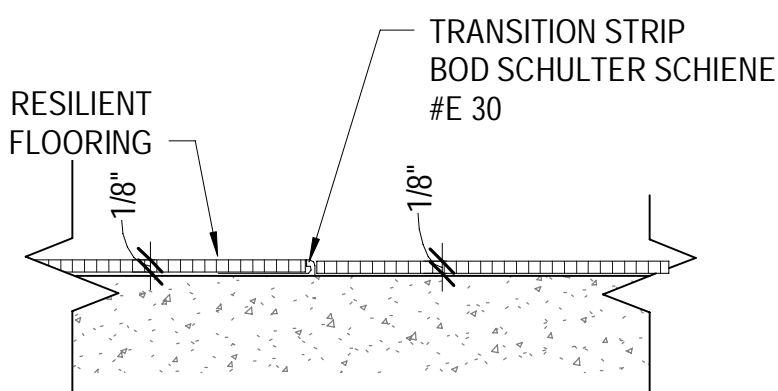

TS - 4 RESILIENT TO STATIC DISSIPATIVE TILE

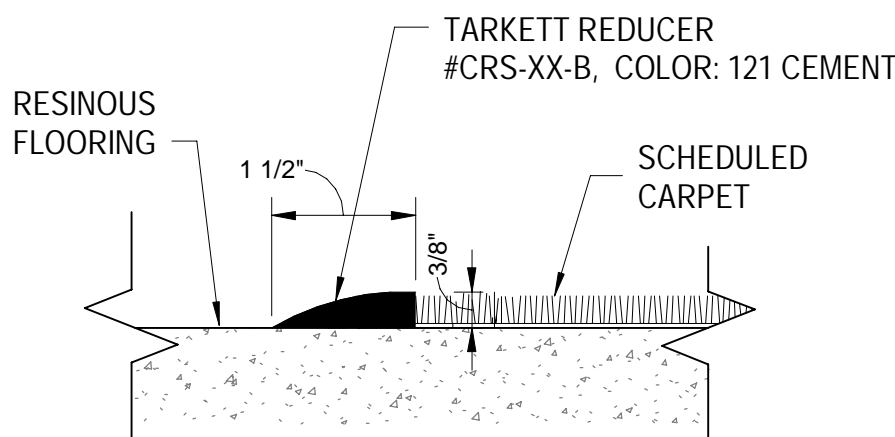

TS - 5 CONCRETE TO CARPET

TRANSITION DETAILS


$$6'' = 1'-0''$$

INTERIOR FINISH SCHEDULE

| ROOM NUMBER | ROOM NAME | FLOOR FINISH | BASE FINISH | WALL FINISH | | | | CEILING | |
|----------------|----------------------------|--------------|-------------|-------------|-------|-------|-------|----------------|----------|
| | | | | NORTH | SOUTH | EAST | WEST | FINISH | HEIGHT |
| 101 | VEST | WO-1 | RB-1 | PT-1 | PT-1 | PT-1 | PT-1 | PT-4 | 9' - 0" |
| 102 | CORR | LVT-1 | RB-1 | PT-1 | PT-1 | PT-1 | PT-1 | ACT-1 | 9' - 0" |
| 103 | OFFICE | LVT-1 | RB-1 | PT-1 | PT-2 | PT-1 | PT-1 | ACT-1 | 9' - 0" |
| 104 | OFFICE | LVT-1 | RB-1 | PT-1 | PT-2 | PT-1 | PT-1 | ACT-1 | 9' - 0" |
| 105 | OFFICE | LVT-1 | RB-1 | PT-1 | PT-2 | PT-1 | PT-1 | ACT-1 | 9' - 0" |
| 106 | OFFICE | LVT-1 | RB-1 | PT-1 | PT-2 | PT-1 | PT-1 | ACT-1 | 9' - 0" |
| 107 | CUSTOMER SERVICE / WAITING | LVT-1 | RB-1 | PT-1 | PT-1 | PT-1 | PT-1 | ACT-1 | 9' - 0" |
| 108 | STOCK CONTROL OFFICE | LVT-1 | RB-1 | PT-1 | PT-1 | PT-1 | PT-1 | ACT-1 | 9' - 0" |
| 109 | PBO OFFICE | LVT-1 | RB-1 | PT-1 | PT-1 | PT-1 | PT-2 | ACT-1 | 9' - 0" |
| 110 | PBO OFFICE | LVT-1 | RB-1 | PT-1 | PT-1 | PT-2 | PT-1 | ACT-1 | 9' - 0" |
| 111 | CORR | LVT-1 | RB-1 | PT-1 | PT-1 | PT-1 | PT-1 | ACT-1 | 9' - 0" |
| 112 | COPY | LVT-1 | RB-1 | PT-1 | PT-1 | PT-1 | PT-1 | ACT-1 | 9' - 0" |
| 113 | CONF ROOM | LVT-1 | RB-1 | PT-1 | PT-1 | PT-1 | PT-1 | ACT-1 | 9' - 0" |
| 114 | OPEN OFFICE | LVT-1 | RB-1 | PT-1 | PT-1 | PT-1 | PT-2 | ACT-1 | 9' - 0" |
| 115 | JAN | PFT-1 | PFT-3 | PT-1 | PT-1 | PT-1 | PT-1 | ACT-1 | 9' - 0" |
| 116 | CORR | LVT-1 | RB-1 | PT-1 | PT-1 | PT-1 | PT-1 | ACT-1 | 9' - 0" |
| 117 | VEST | WO-1 | RB-1 | PT-1 | PT-1 | PT-1 | PT-1 | PT-4 | 9' - 0" |
| 118 | BREAK ROOM | LVT-1 | RB-1 | PT-1 | PT-1 | PT-1 | PT-1 | ACT-1 | 9' - 0" |
| 119 | MOTHERS | LVT-1 | RB-1 | PT-1 | PT-2 | PT-1 | PT-1 | ACT-2 | 9' - 0" |
| 120 | SIPR | SDT-1 | RB-1 | PT-1 | PT-1 | PT-1 | PT-1 | EXPOSED / PT-5 | |
| 121 | VENDOR / ESS | SDT-1 | RB-1 | PT-1 | PT-1 | PT-1 | PT-1 | EXPOSED / PT-5 | |
| 122 | STORAGE FILE | LVT-1 | RB-1 | PT-1 | PT-1 | PT-1 | PT-1 | ACT-1 | 9' - 0" |
| 123 | SHOWER | PFT-2 | PFT-3 | CWT-2 | CWT-2 | CWT-2 | CWT-2 | ACT-3 | 9' - 0" |
| 124 | WOMEN'S | PFT-1 | PFT-3 | CWT-1 | CWT-1 | CWT-1 | CWT-1 | ACT-2 | 9' - 0" |
| 125 | MEN'S | PFT-1 | PFT-3 | CWT-1 | CWT-1 | CWT-1 | CWT-1 | ACT-2 | 9' - 0" |
| 126 | SHOWER | PFT-2 | PFT-3 | CWT-2 | CWT-2 | CWT-2 | CWT-2 | ACT-3 | 9' - 0" |
| 127 | MECH/PLUMB | SC | RB-1 | PT-1 | PT-1 | PT-1 | PT-1 | EXPOSED / PT-5 | |
| 128 | ELECTRICAL | SC | RB-1 | PT-1 | PT-1 | PT-1 | PT-1 | EXPOSED / PT-5 | |
| 129 | WAREHOUSE | SC | RB-1 | PT-1 | PT-1 | PT-1 | PT-1 | EXPOSED / PT-5 | |
| 130 | VAULT | SC | RB-1 | PT-1 | PT-1 | PT-1 | PT-1 | ACT-1 | 9' - 0" |
| 131 | TELECOM | SDT-1 | RB-1 | PT-1 | PT-1 | PT-1 | PT-1 | EXPOSED / PT-5 | 11' - 4" |
| 132 | LOCKABLE STORAGE | SC | RB-1 | PT-1 | PT-1 | PT-1 | PT-1 | PT-5 | 11' - 0" |
| 133 | STORAGE CAGE | SC | RB-1 | PT-1 | - | - | - | EXPOSED / PT-5 | |
| 133B | PBO STORAGE CAGE | SC | RB-1 | PT-1 | - | - | - | EXPOSED / PT-5 | |
| 134 | GIP WAREHOUSE | SC | RB-1 | PT-1 | PT-1 | PT-1 | PT-1 | EXPOSED / PT-5 | |
| 135 | CUSTOMER SERVICE AREA | LVT-1 | RB-1 | PT-1 | PT-1 | PT-1 | PT-1 | ACT-1 | 9' - 0" |
| 136 | RESTROOM | PFT-1 | PFT-3 | CWT-1 | CWT-1 | CWT-1 | CWT-1 | ACT-2 | 9' - 0" |
| 137 | CLS OFFICE | LVT-1 | RB-1 | PT-1 | PT-1 | PT-1 | PT-1 | ACT-1 | 9' - 0" |
| 138 | STORAGE CAGE | SC | RB-1 | PT-1 | - | PT-1 | - | EXPOSED / PT-5 | 9' - 0" |

GENERAL SHEET NOTES

1. THE MANUFACTURER'S NAMES AND THEIR PRODUCTS REFERENCED INDICATE THE COLOR, TEXTURE, AND PATTERN REQUIRED FOR THE MATERIALS LISTED. THE PRODUCTS FURNISHED SHALL MEET THE COLOR, TEXTURE, AND PATTERN INDICATED AS WELL AS THE MATERIAL QUALITY AND PERFORMANCE SPECIFIED IN THE APPLICABLE TECHNICAL SPECIFICATION SECTION. THE USE OF MANUFACTURER'S NAMES AND PRODUCTS DO NOT PRECLUDE THE USE OF OTHER MANUFACTURER'S PRODUCTS OF APPROVED EQUAL COLOR, TEXTURE, AND PATTERN AS LONG AS ALL REQUIREMENTS IN THE TECHNICAL SECTIONS ARE MET.



**US Army Corps
of Engineers®**

[illegible]

| | |
|---------------|--------------|
| ISSUE DATE: | SEPT 2022 |
| DESIGNED BY: | CAS |
| DRAWN BY: | CAS |
| CHECKED BY: | FAH |
| SUBMITTED BY: | |
| SIZE: | SECOND TITLE |
| ANS/D | |

US ARMY CORPS OF ENGINEERS
WILMINGTON DISTRICT
69 DARLINGTON AVENUE
WILMINGTON, NORTH CAROLINA 28403-1343

WHITMAN, REQUARDT & ASSOCIATES, LLP
801 SOUTH CAROLINE STREET
BALTIMORE, MARYLAND 21231

**FORT BRAGG, NORTH CAROLINA
SOF SUPPLY SUPPORT ACTIVITY
PROJECT 87447
FINISH LIST, FINISH SCHEDULE AND TRANSITION
DETAILS**

SHEET ID

I-601

Section 4: Finish Color Boards



LUXURY VINYL TILE, LVT-1


TARKETT

STYLE: EVENT TRAVERTINE

COLOR: TOSCANO #7212

SIZE: 12" X 36" X .120" THICK

INSTALLATION: GLUE DOWN

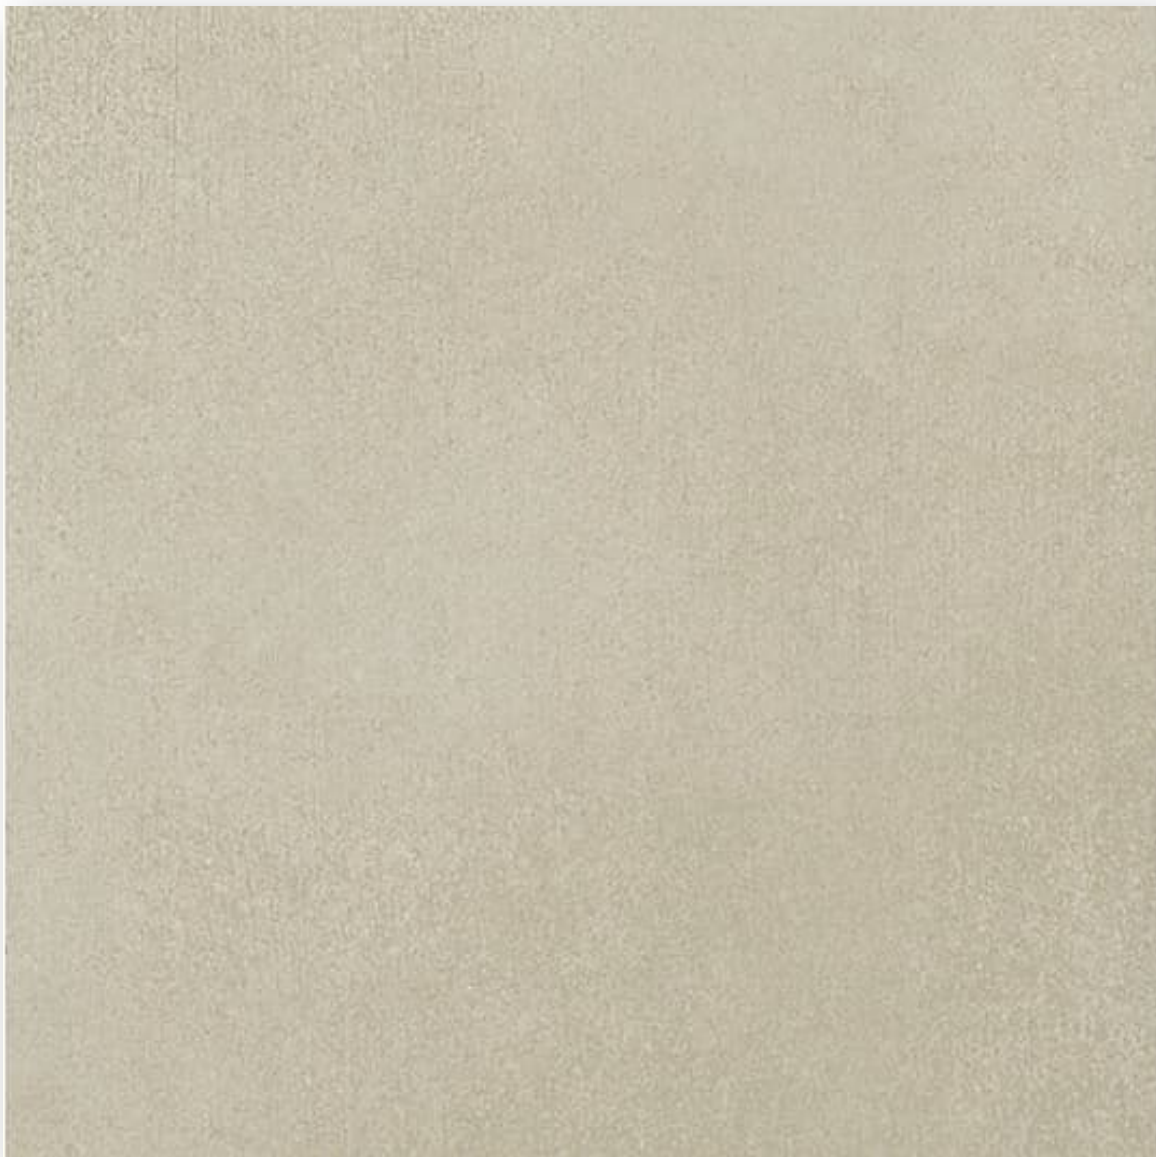

PORCELAIN FLOOR TILE, PFT-1

DALTILE

COLLECTION: VOLUME 1.0
COLOR: REVERB ASH #VL74
SIZE: 12" X 12" X 5/16" THICK
FINISH: MATTE

PORCELAIN WALL BASE, PFT-3

DALTILE

COLLECTION: VOLUME 1.0
STYLE: COVE BASE P-36C9TB
COLOR: REVERB ASH #VL74
SIZE: 6" X 12"
FINISH: MATTE



PORCELAIN FLOOR TILE, PFT-2

DALTILE

COLLECTION: COLOR WHEEL MOSAIC

STYLE: 2" X 2" MOSAIC DOT MOUNTED

SHAPE: STRAIGHT JOINT

COLOR: MATTE ARCTIC WHITE #0790


THICKNESS: 1/4"

FINISH: MATTE



RESINOUS FLOORING, SC

STONHARD
STYLE: STONCLAD GS
COLOR: MUSHROOM

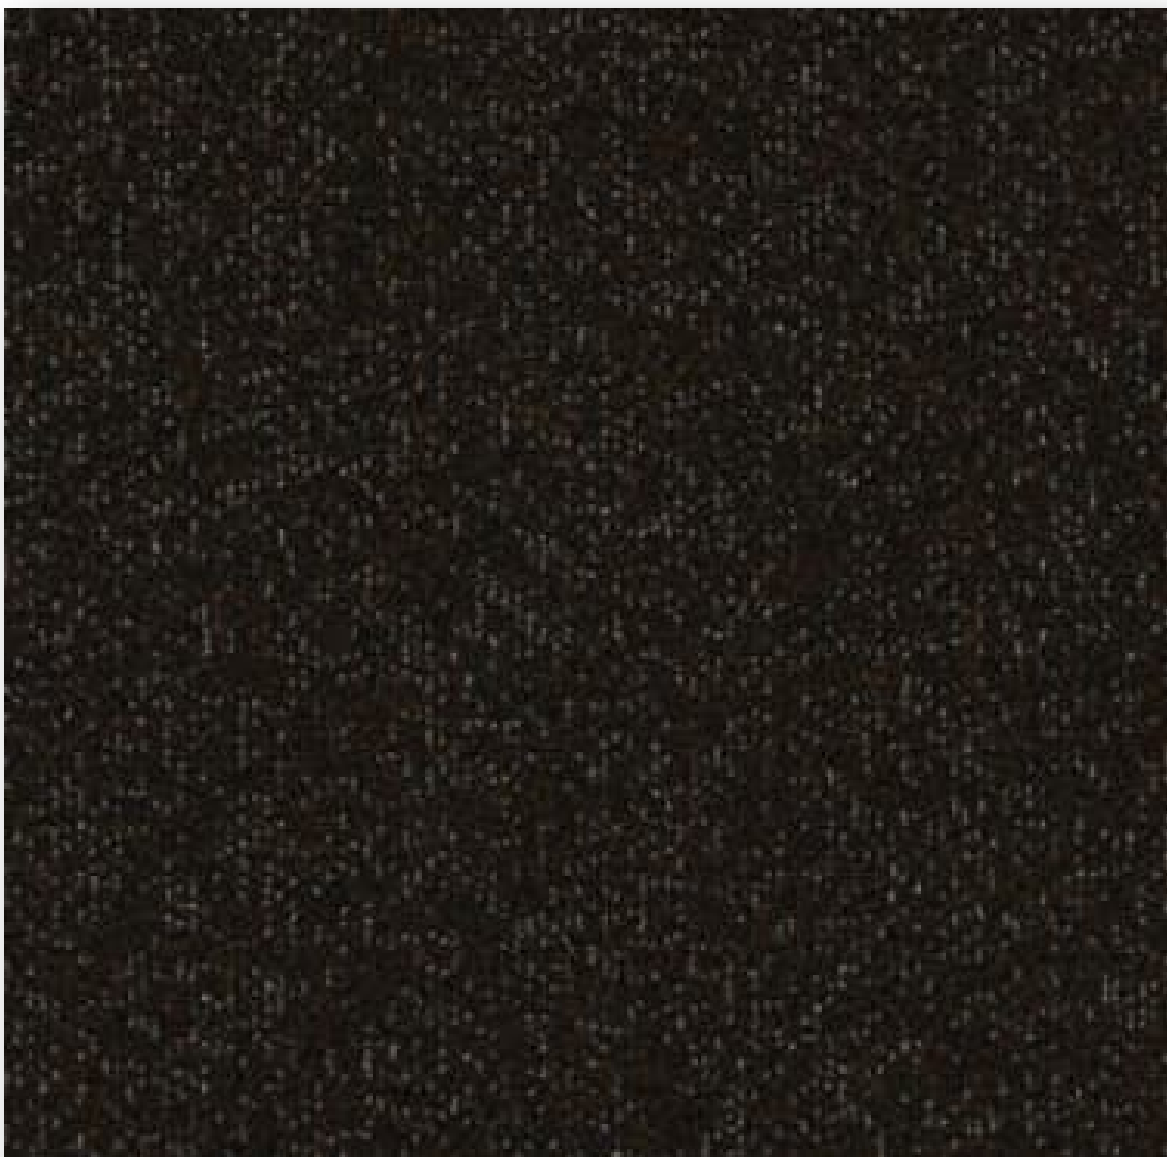

WALK-OFF CARPET, WO-1

TARKETT

STYLE: ABRASIVE ACTION II 02578

COLOR: WINTER GRAY 1910

SIZE: 24" X 24" X 0.115" THICK


INSTALLATION: MONOLITHIC

GAUGE: 1/12"



WALK-OFF MAT, WO-2

MATS INC
STYLE: 3M NOMAD CARPET MATTING 5000
COLOR: BLACK-GREY
SIZE: 48" X 72"

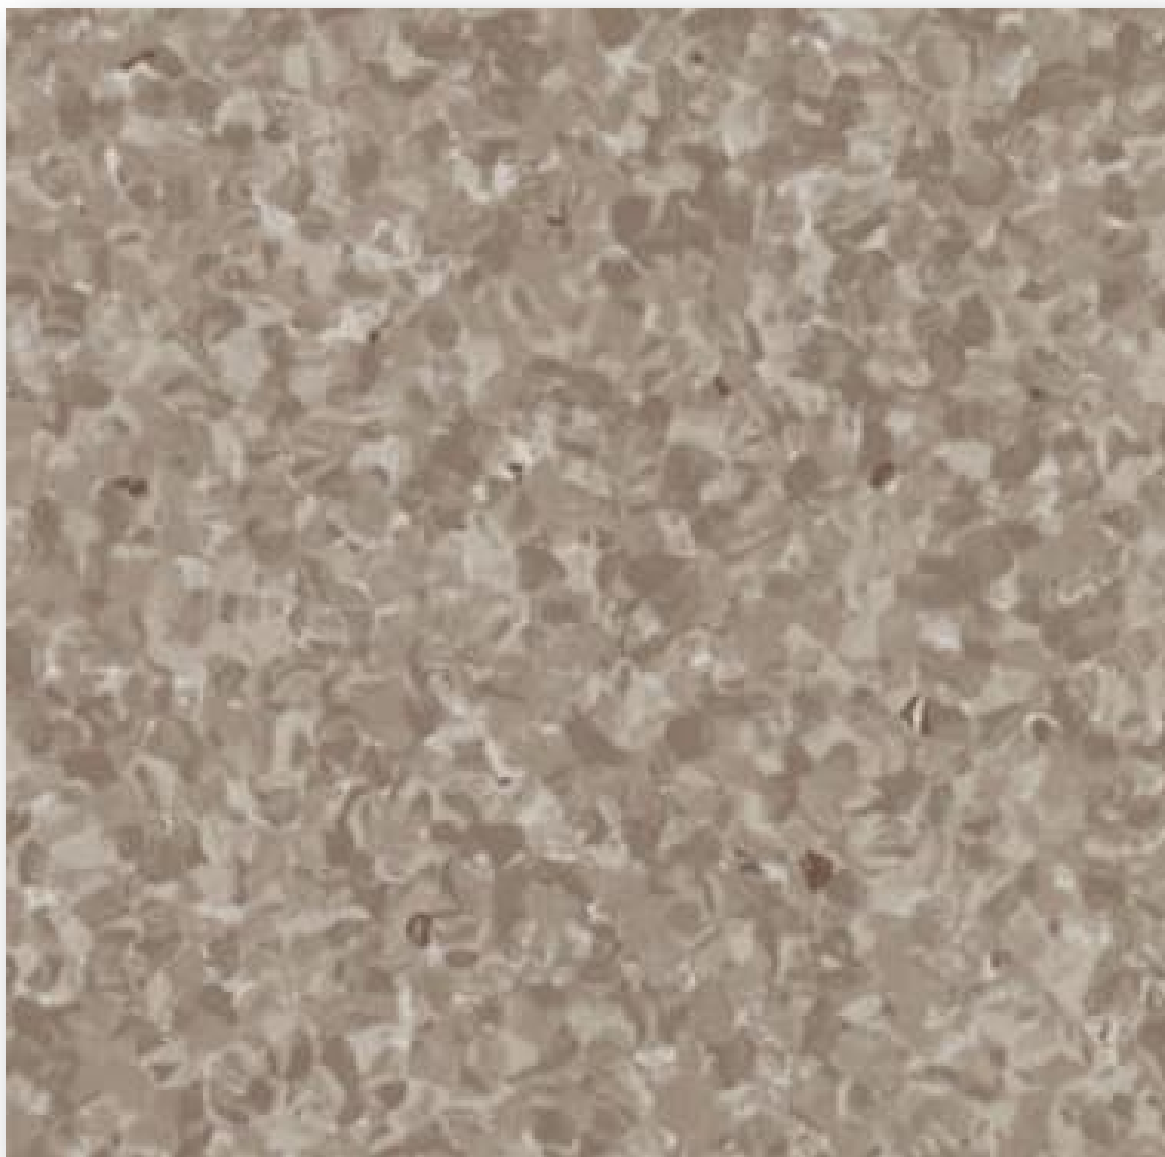


STATIC DISSAPTIVE TILE, SDT-1

TARKETT
STYLE: IQ GRANIT SD
COLOR: FLANNEL BLANKET 0722
SIZE: 24" X 24:
THICKNESS: 2MM




RUBBER BASE, RB-1

TARKETT
HEIGHT: 4" COVE BASE
COLOR: #121 CEMENT




GENERAL WALL PAINT, PT-1

PPG
COLOR: 'COMMERCIAL WHITE' PPG1025-1
MPI CODE: FS-27886
FINISH: EGGSHELL



ACCENT WALL PAINT, PT-2

PPG
COLOR: 'STORM'S COMING' PPG1008-2
MPI CODE: FS-16400
FINISH: EGGSHELL



DOOR TRIM PAINT, PT-3

PPG
COLOR: 'STORM'S COMING' PPG1008-2
MPI CODE: FS-16400
FINISH: SEMI-GLOSS



CERAMIC WALL TILE, CWT-1


DAL TILE

STYLE: COLOR WHEEL

COLOR: BISCUIT #00101

SIZE: 4" X 16"

INSTALLATION: RUNNING BOND

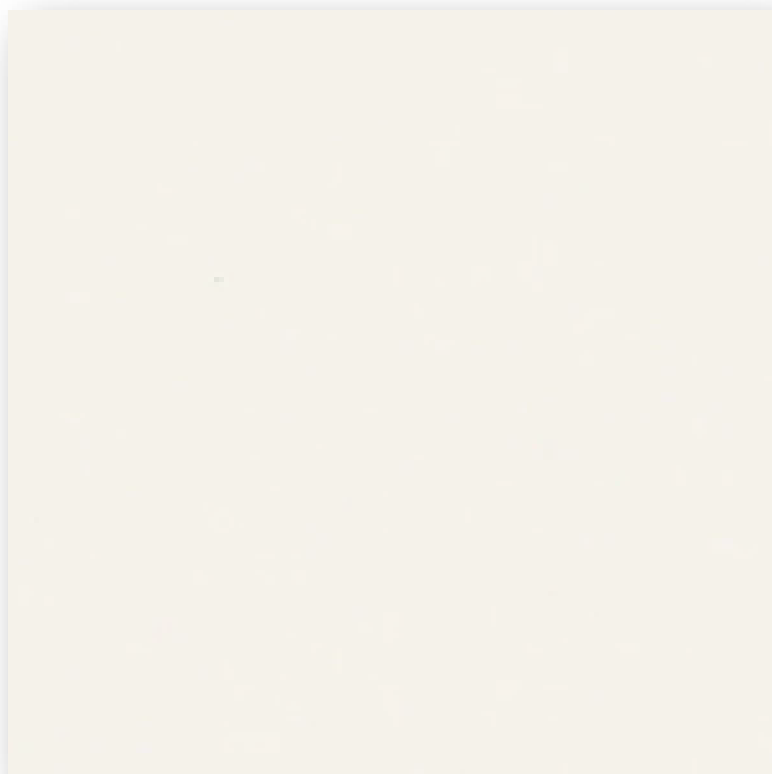

CERAMIC WALL TILE, CWT-2


DAL TILE

STYLE: COLOR WHEEL LINEAR

COLOR: MATTE ARCTIC WHITE #0790

SIZE: 3" X 6"

INSTALLATION: RUNNING BOND

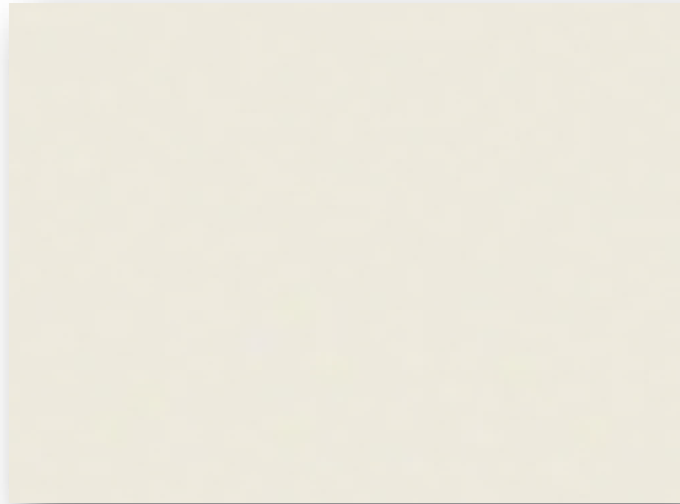

CORNER GUARD, CG-1

CONSTRUCTION SPECIALITIES

STYLE: ACROVYN

COLOR: PEARL #934

THICKNESS: .040"



SOLID SURFACE, SS-1

CORIAN SOLID SURFACE

COLOR: WHITE JASMINE




PLASTIC LAMINATE, PLAM-2

FORMICA
COLOR: CREAM SOFTWOOD 4923-NG
GRAIN: NATURAL


PLASTIC LAMINATE, PLAM-1

NOT USED

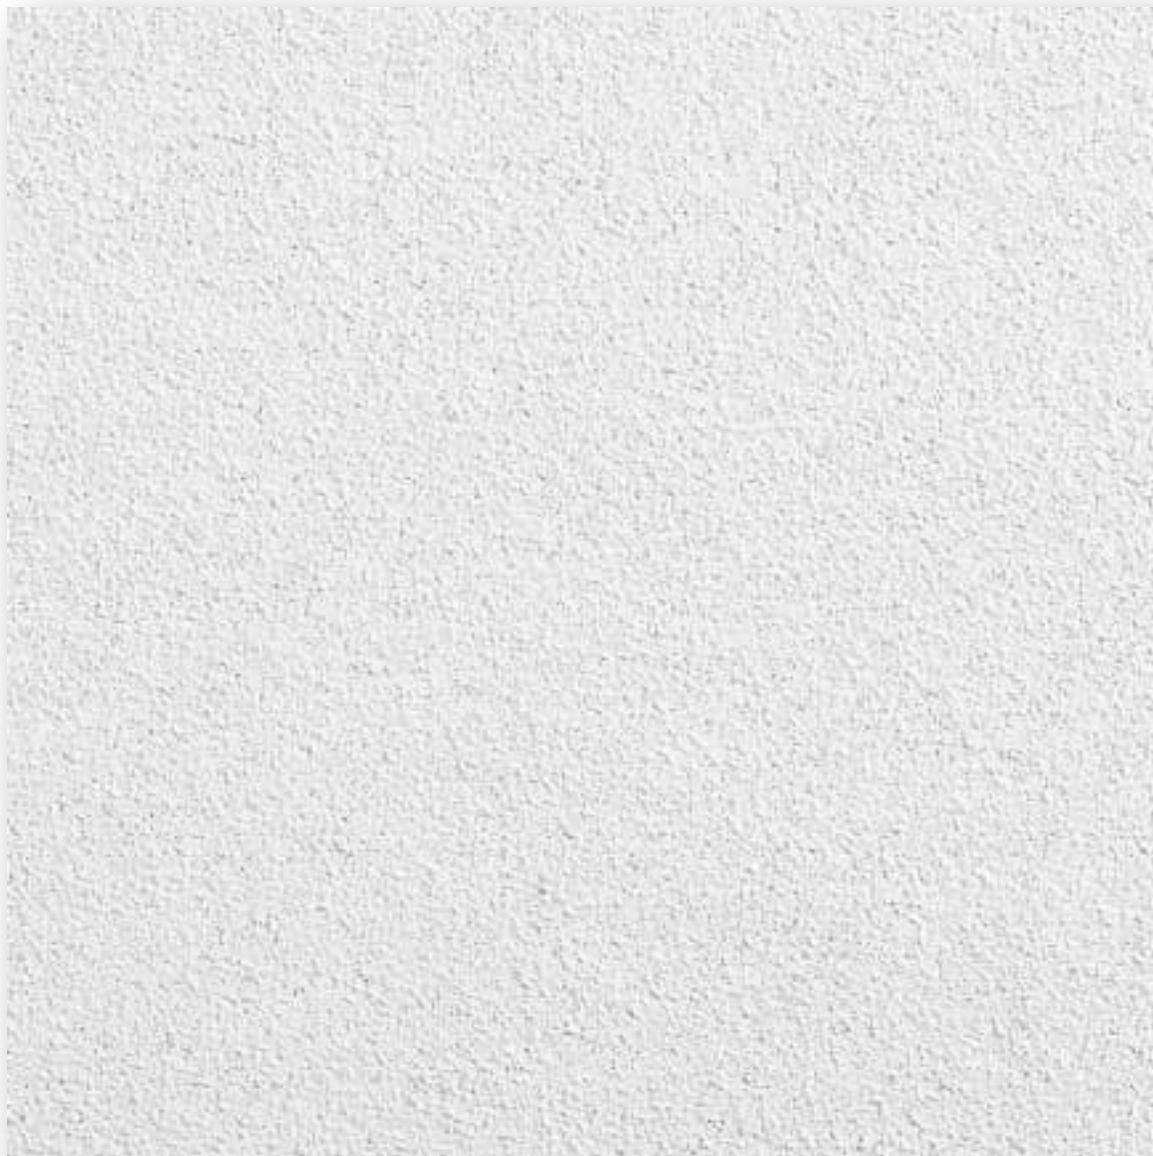

ACOUSTICAL PANEL CEILING, ACT-1

ARMSTRONG CEILING
COLLECTION: ULTIMA LAY-IN AND TEGULAR
SIZE: 24" X 24" X .75"
GRID: 15/16" PRELUDE
COLOR: WHITE

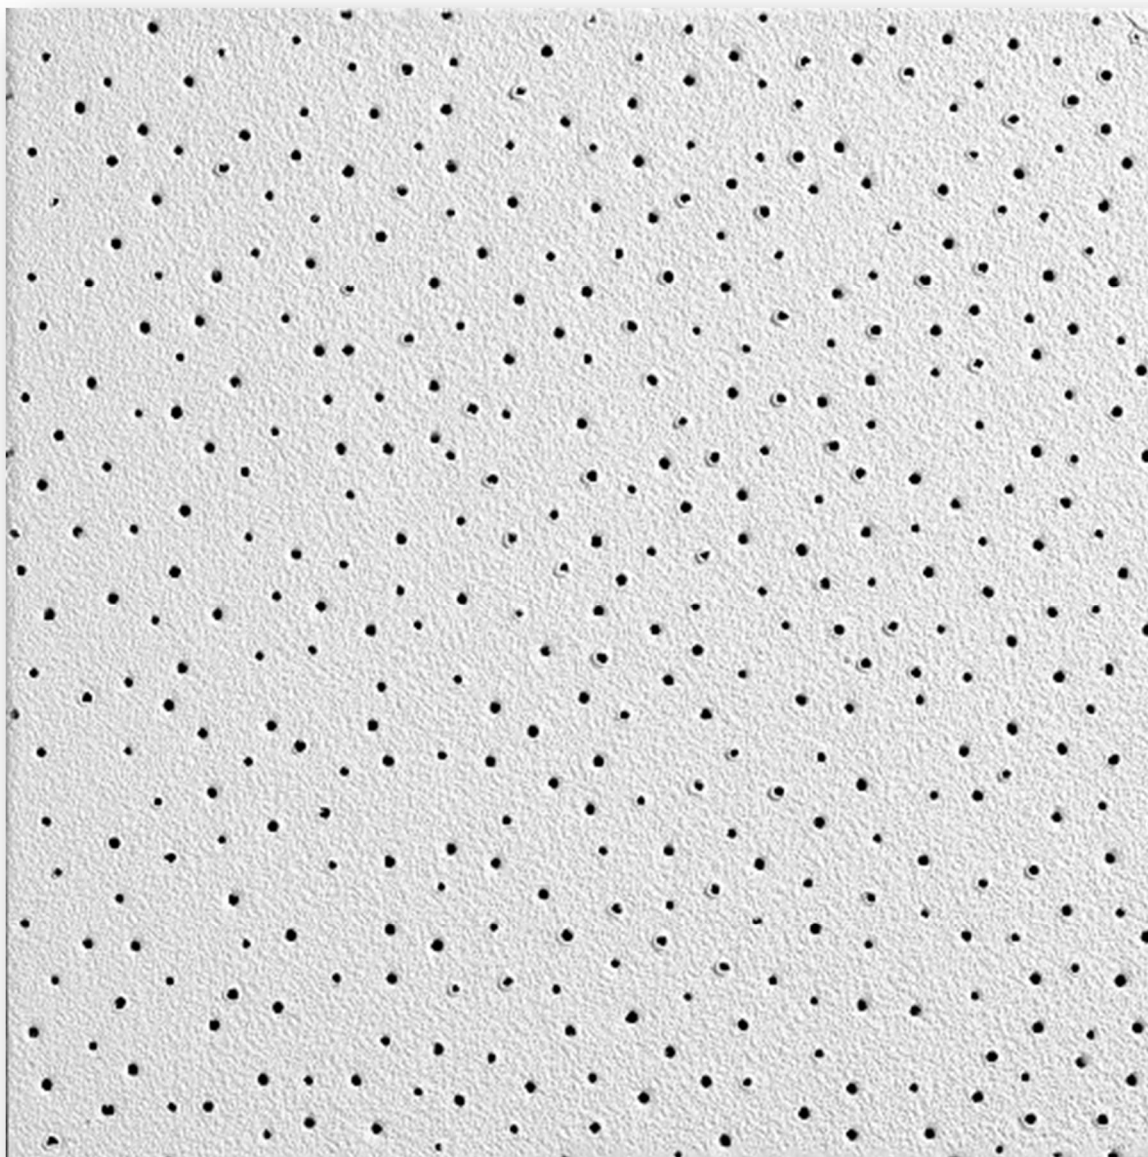

ACOUSTICAL PANEL CEILING, ACT-2


ARMSTRONG CEILING

COLLECTION: VL PERFORATED

SIZE: 24" X 24" X 5/8"


GRID: 15/16" PRELUDE PLUS XL ALUMINUM

COLOR: WHITE

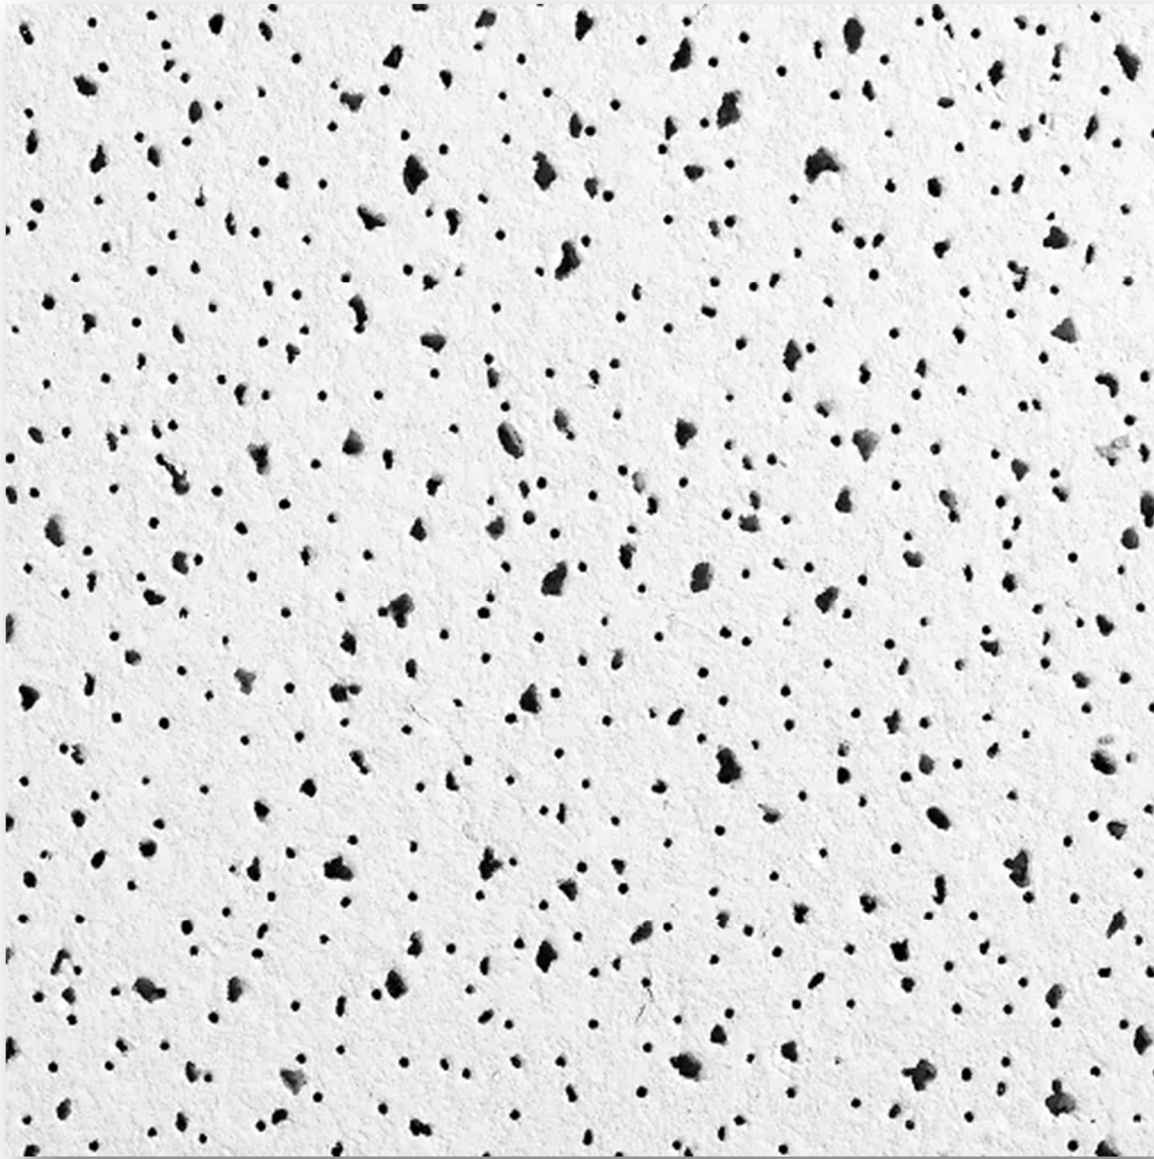

ACOUSTICAL PANEL CEILING, ACT-3

ARMSTRONG CEILING
COLLECTION: CERAMAGUARD FINE FISSURED PERFORATED
SIZE: 24" X 24" X 5/8"
GRID: 15/16" PRELUDE PLUS XL ALUMINUM
COLOR: WHITE



GYPSUM CEILING PAINT, PT-4

PPG

COLOR: 'GYPSUM' PPG1006-1

MPI CODE: FS-37885

FINISH: FLAT




GYPSUM CEILING PAINT, PT-5

PPG

COLOR: 'ARTILLERY' PPG1008-6

MPI CODE: FS-36307

FINISH: FLAT



HORIZONTAL LOUVER BLINDS, AB-1

HUNTER DOUGLAS

STYLE: CL62 1" ALUMINUM

HORIZONTAL BLINDS

COLOR: 974 PEARL

SIZE: 1" X 1" X .024"
